

Наименование на материала:

Триполюсни автоматични прекъсвачи НН с лят корпус, от 100 А до 400 А, с термомагнитна защита, категория А

Съкратено наименование на материала: Трип. авт. прек. НН, с ТМ защита, 100-400 А, кат. А

Област: Н – Електрически уредби СрН/НН

Категория: 17– Комутационни апарати НН за защита

Мерна единица: Брой

Аварийни запаси: Да

Характеристика на материала:

Триполюсните автоматични прекъсвачи НН с лят корпус представляват механични комутационни апарати от фиксиран тип с предно свързване на шинната система. Автоматичните прекъсвачи са способни да провеждат и да включват/изключват ръчно електрически токове във вериги при нормални условия и да включват, да провеждат за определено време и да изключват автоматично посредством електромеханична защита от термомагнитен тип токове във вериги при условията на претоварване и късо съединение.

Тялото (корпусът) на автоматичните прекъсвачи НН е изработено чрез формоване на устойчив на нагряване, на огън и на механични удари изолационен материал. Използваните в конструкцията изолационни материали съответстват на изискванията на т. 7.1. от БДС EN 60947-2 или еквивалентно/и.

Управлението се осъществява ръчно посредством лост. Включването/изключването на контактите на трите полюса се осъществява едновременно с висока скорост, която не зависи от действията на оператора. Автоматичният прекъсвач изпълнява разединяваща функция, която е обозначена със съответния символ. На челния панел на прекъсвача е разположен тест-бутон за проверка на изключвателния механизъм. Лостът за управление при вертикално монтиране на автоматичните прекъсвачи се движи в направление „нагоре – надолу“, при което контактите се затварят при движение „нагоре“. Лостът има три ясно индицирани положения, съответстващи на позицията на контактната система: „Включено“, „Изключено“ и „Автоматично изключено от свръхтокове /Тест“. Конструкцията осигурява защита срещу проникване на твърди тела и вода до степен най-малко IP20 за клемните съединения и IP40 за челната повърхност на прекъсвача, съгласно БДС EN 60529+A1 или еквивалентно/и.

Стойностите на прегряването на частите на триполюсните автоматични прекъсвачи НН с лят корпус при нормален работен режим при температура до 40°C не трябва да надвишават посочените в таблица 7 от БДС EN 60947-2 стойности или еквивалентно/и. Прекъсвачите са маркирани с информацията съгласно т. 5.2 от БДС EN 60947-2 или еквивалентно/и и СЕ маркировка за съответствие.

Прекъсвачите се доставят с предпазни клемови капаци, изолиращи фазови сепаратори и разширители и удължители на входа и на изхода, които са подходящи за свързване към шинна система, която е изработена с алуминиеви шини с правоъгълно сечение.

Триполюсните автоматични прекъсвачи са пакетирани в картонени кутии, на които е залепен етикет с наименование на материала „Автоматичен прекъсвач“, техническите данни, годината на производство, партидните номера и стандарта, в съответствие с който са произведени и изпитани - БДС EN 60947-2 или еквивалентно/и.

Използване:

Триполюсните автоматични прекъсвачи НН с лят корпус се монтират в разпределителни табла в трансформаторните постове и се използват за защита на електропроводните линии.

Съответствие на предлаганото изпълнение с нормативно-техническите документи:

Триполюсните автоматични прекъсвачи НН с лят корпус трябва да отговарят на посочените по-долу стандарт, или еквивалентно/и, включително на техните валидни изменения и допълнения:

- БДС EN 60947-1:2007 “Комутационни апарати за ниско напрежение. Част 1: Общи правила (IEC 60947-1:2007)” или еквивалентно/и;
- БДС EN 60947-2:2006 „Комутационни апарати за ниско напрежение. Част 2: Автоматични прекъсвачи (IEC 60947-2:2006)” или еквивалентно/и; и
- БДС EN 60529+A1:2004 Степени на защита, осигурени от обвивката (IP код) (IEC 60529:1989+A1:1999) или еквивалентно/и; и

да бъдат оценени положително по реда и при условията на Наредбата за съществените изисквания и оценяване на съответствието на електрически съоръжения, предназначени за използване в определени граници на напрежението.

Изисквания към документацията и изпитванията:

№ по ред	Документ	Приложение № (или текст)
1	Точно означение на типа, производителя и страната на производство (произход) и последно издание на каталога на производителя	T5N400 TMA R400A, ABB, ITALY Приложение 9.17.1
2	Техническо описание и чертежи с нанесени на тях размери	Приложение 9.17.2
3	ЕО декларация за съответствие	Приложение 9.17.3
4	Протоколи от типови изпитвания на английски или български език, проведени от независима изпитвателна лаборатория – заверени копия, с приложен списък на отделните изпитвания на български език	Приложение 9.17.4
5	Сертификат/акредитация на независимата изпитвателна лаборатория, провела типовите изпитвания по т. 4 – заверено копие	Приложение 9.17.5
6	Инструкции за транспортиране, складиране, монтиране, вкл. въртящия момент на затягане на клемовите съединения, обслужване и поддържане	Приложение 9.17.6

Забележка: Всички оригинални документи трябва да бъдат на български език или с превод на български език. (Каталозите и протоколите от проверките и изпитванията могат да бъдат и само на английски.)

Технически данни

1. Характеристики на работната среда

№ по ред	Характеристика	Стойност
1.1	Място на монтиране	На закрито
1.2	Максимална околна температура	+ 40°C
1.3	Минимална околна температура	Минус 5°C
1.4	Максимална средна околна температура за период от 24 ч.	+ 35°C
1.5	Относителна влажност (при 20°C)	До 90 %
1.6	Степен на замърсяване	3
1.7	Надморска височина	До 2000 m

2. Параметри на електроразпределителната мрежа

№ по ред	Параметър	Стойност
2.1	Номинално напрежение	400 / 230 V
2.2	Максимално напрежение	440 / 253 V
2.3	Номинална честота	50 Hz
2.4	Брой проводници в разпределителната мрежа	4 проводна мрежа (L ₁ , L ₂ , L ₃ , PEN)
2.5	Схема на разпределителната мрежа	TN-C

3. Общи технически параметри и други данни

№ по ред	Технически параметър	Изискване	Гарантирано предложение
3.1	Брой на полюсите	3	3
3.2	Обявено работно напрежение (U _o)	min 690 V AC	690 V AC
3.3	Обявена честота	50 Hz	50 Hz
3.4	Обявено импулсно напрежение (U _{imp})	min 6 kV	8 kV
3.5	Обявено изолационно напрежение (U _i)	min 690 V	1000 V

№ по ред	Технически параметър	Изискване	Гарантирано предложение
3.6	Категория на приложение	A	B
3.7	Работна изключвателна възможност при късо съединение (I_{cs})	min 50% от I_{cu}	100% от I_{cu}
3.8	Защита от свръхтокове	-	-
3.8.1	Тип на защитата	Защитата от свръхтокове трябва да бъде от термомагнитен тип. (Допускат се изпълнения със защита от електронен тип.)	ДА, Защитата от свръхтокове е от термомагнитен тип.
3.8.2	Защита от претоварване	а) Диапазон на настройване на тока на изключване $I_R = (\min 0,8+1) \times I_n$	$I_R = 0,7+1 \times I_n$
		б) Условен ток на неизключване $I_{nd} = 1,05 \times I_R$ във времеви интервал от 120 минути	$I_{nd} = 1,05 \times I_R$
		в) Условен ток на изключване $I_d = 1,30 \times I_R$ във времеви интервал до 120 минути	$I_d = 1,30 \times I_R$
3.8.3	Защита от къси съединения	Токът на изключване I_l трябва да бъде фиксиран на една от стойностите или регулируем в диапазона препоръчително от min $4 \times I_n$ до $10 \times I_n$	от $5 \times I_n$ до $10 \times I_n$
3.9	Степен на защита от проникване на твърди тела и вода съгласно БДС EN 60529 или еквивалентно/и	-	-
3.9.1	Клемни съединения	IP 20	IP 20
3.9.2	Челна повърхност	IP 40	IP 40
3.10	Акcesoари	а) Два комплекта разширители и удължител за свързване към шинна система от алуминиева шина с правоъгълно сечение	ДА, Два комплекта разширители и удължител за свързване към шинна система от алуминиева шина с правоъгълно сечение
		б) Два комплекта предпазни клемови капаци и изолиращи фазови сепаратори.	ДА, Два комплекта предпазни клемови капаци и изолиращи фазови сепаратори.

4. Триполюсни автоматични прекъсвачи НН с лят корпус, 100 А ÷ 400 А, с термомагнитна защита, категория А

4.5 Триполюсен автоматичен прекъсвач НН с лят корпус, 400 А, с термомагнитна защита, кат. А

Номер на стандарта		Тип/референтен номер съгласно каталога на производителя	
20 17 5005		Да се посочи	
Наименование на материала		Триполюсен автоматичен прекъсвач НН с лят корпус, 400 А, с термомагнитна защита, кат. А	
Съкратено наименование на материала		Трип. авт. прек. НН, с ТМ защита, 400 А, кат. А	
№ по ред	Технически параметър	Изискване	Гарантирано предложение
4.5.1	Обявен ток (I_n)	400 А	400 А
4.5.2	Обявена максимална изключвателна възможност при к.с. (I_{cu})	min 20 kA / 500 V	25 kA/500 V
4.5.3	Работна изключвателна възможност при късо съединение (I_{cs})	Съгласно т. 3.7 и т. 4.4.2 Да се посочи	100% от I_{cu} 25 kA/500 V
4.5.4	Ток на изключване на защитата от къси съединения (I_t)	Съгласно т. 3.8.3 Да се посочи	от $5x I_n$ до $10x I_n$
4.5.5	Време за изключване при I_{cu}	max 0,010 s	0,01 s
4.5.6	Износоустойчивост	-	-
4.5.6a	Електрическа (брой к.ц.)	min 1000 бр.	7 000
4.5.6b	Механична (брой к.ц.)	min 4000 бр.	20 000
4.5.7	Максимални размери ВхШхД (Дълбочината „Д“ не включва лоста за управление)	300x195x160 mm	205x140x103,5 mm
4.5.8	Тегло, kg	Да се посочи	3,25



ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПЛЕКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОПАРАТУРА ИИ и СрН

гр.Петрич 2850, Промислена зона
ул. "Свобода" 49
тел.: 00359 745 60743; факс: 00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул. "Рикардо Викарини" бл.5
тел.: 00359 2 869 0696; факс: 00359 2 950 9334
e-mail: salex@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026856

ПРИЛОЖЕНИЕ 9.17.1


Точно означение на типа, производителя и страната на производство (произход) и последно издание на каталога на производителя

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /ИИ/ "

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

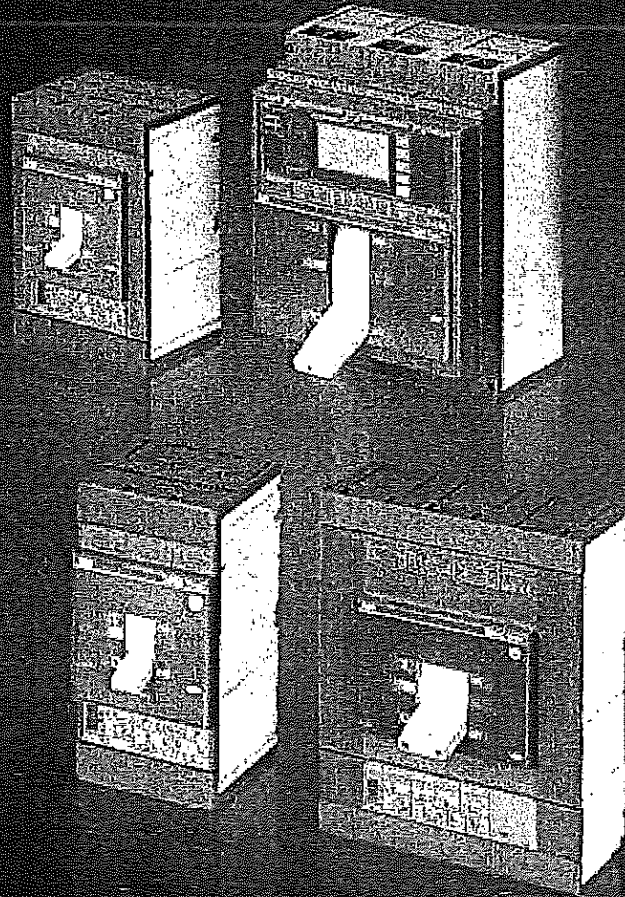

Technical catalogue / May 2016

SACE Tmax. T Generation

Low voltage moulded-case circuit-breakers from 250 A up to 1600 A


Power and productivity
for a better world™

ABB

Construction characteristics

Modularity of the series

1

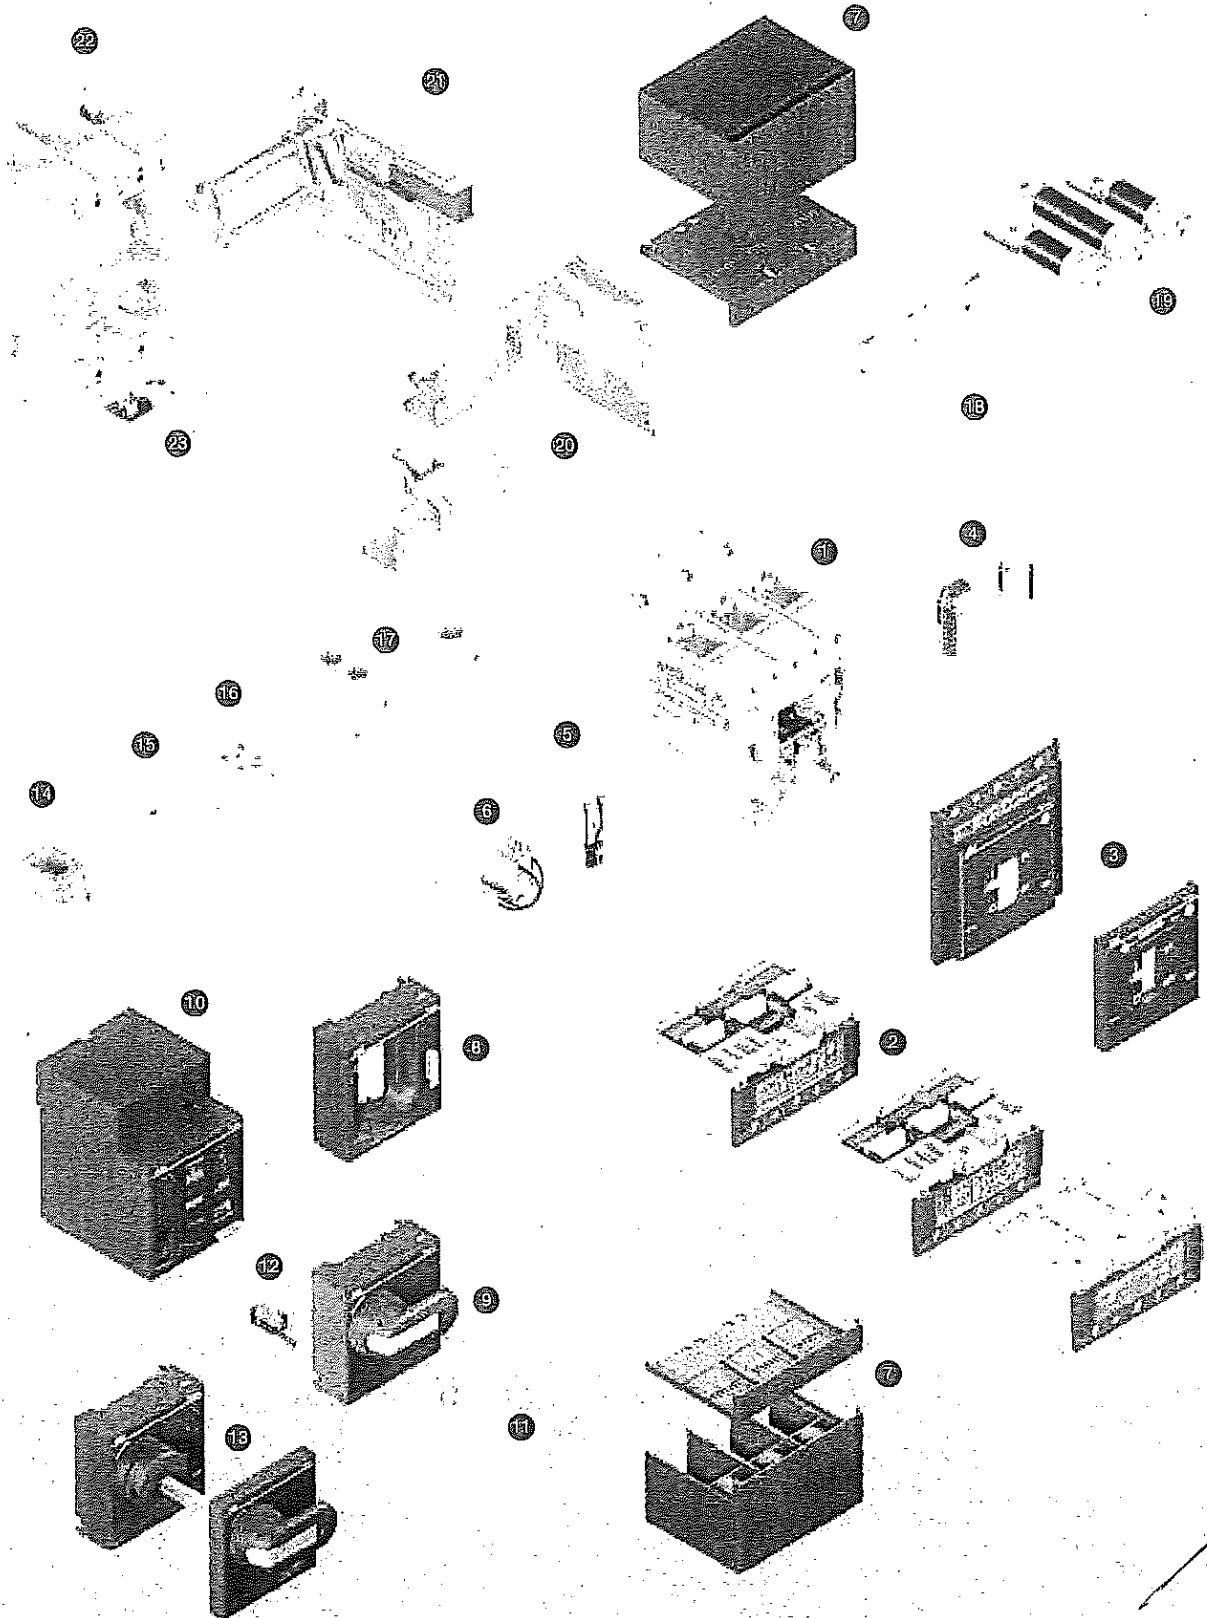

Construction characteristics

Distinguishing features of the series

1

Double insulation

Tmax has double insulation between the live power parts (excluding the terminals) and the front parts of the apparatus where the operator works during normal operation. The seat of each electrical accessory is completely segregated from the power circuit, thereby preventing any risk of contact with live parts, and, in particular, the operating mechanism is completely insulated in relation to the powered circuits.



Furthermore, the circuit-breaker has oversized insulation, both between the live internal parts and in the area of the connection terminals. In fact, the distances exceed those required by the IEC Standards and comply with what is prescribed by the UL 489 Standard.

Positive operation

The operating lever always indicates the precise position of the moving contacts of the circuit-breaker, thereby guaranteeing safe and reliable signals, in compliance with the prescriptions of the IEC 60073 and IEC 60417-2 Standard (I = Closed; O = Open; yellow-green line = Open due to protection trip). The circuit-breaker operating mechanism has free release regardless of the pressure on the lever and the speed of the operation. Protection tripping automatically opens the moving contacts: to close them again, the operating mechanism must be reset by pushing the operating lever from the intermediate position into the lowest open position.

Isolation behaviour

In the open position, the circuit-breaker guarantees circuit in compliance with the IEC 60947-2 Standard. The oversized insulation distances guarantee there are no leakage currents and dielectric resistance to any overvoltages between input and output.

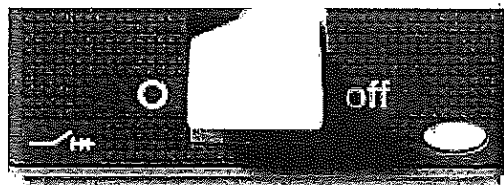

Degrees of protection

The table indicates the degrees of protection guaranteed by Tmax circuit-breakers according to the prescriptions of the IEC 60529 Standard:

	With front	Without front ⁽¹⁾	Without terminal covers	With high terminal covers	With low terminal covers	With IP40 protection kit on the front
A	IP 40 ⁽²⁾	IP 20	-	-	-	-
B ⁽⁴⁾	IP 20	IP 20	IP 20	IP 40	IP 40	IP 40
C	-	-	-	IP 40 ⁽³⁾	IP 30 ⁽¹⁾	-


⁽¹⁾ After correct installation

⁽²⁾ During installation of the electrical accessories

⁽³⁾ Also for front for lever operating mechanism and direct rotary handle

⁽⁴⁾ Only for T1...T5

The fixed parts are always preset with IP20 degree of protection. IP54 degree of protection can be obtained with the circuit-breaker installed in a switchboard fitted with a rotary handle operating mechanism transmitted on the compartment door and special kit (RHE - IP54).



1

Operating temperature

The Tmax circuit-breakers can be used in environmental conditions where the ambient air temperature varies between -25 °C and +70 °C, and stored in ambients with temperatures between -40 °C and +70 °C.

The circuit-breakers fitted with thermomagnetic trip units have their thermal element set for a reference temperature of +40 °C. For temperatures other than +40 °C, with the same setting, there is a thermal trip threshold variation as shown in the table on page 4/50 and following. The electronic trip units do not undergo any variations in performance as the temperature varies but, in the case of temperatures exceeding +40 °C, the maximum setting for protection against overloads L must be reduced, as indicated in the derating graph on page 4/37 and following, to take into account the heating phenomena which occur in the copper parts of the circuit-breaker passed through by the phase current.



For temperatures above +70 °C the circuit-breaker performances are not guaranteed.

To ensure service continuity of the installations, the way to keep the temperature within acceptable levels for operation of the various devices and not only of the circuit-breakers must be carefully assessed, such as using forced ventilation in the switchboards and in their installation room.

Altitude


Up to an altitude of 2000 m Tmax circuit-breakers do not undergo any alterations in their rated performances. As the altitude increases, the atmospheric properties are altered in terms of composition, dielectric resistance, cooling capacity and pressure. Therefore the circuit-breaker performances undergo derating, which can basically be measured by means of the variation in significant parameters such as the maximum rated operating voltage and the rated uninterrupted current.

Altitude	[m]	2000	2600	3000	3900	4000	5000
Derating on service voltage, Ue	[%]	100	93	88	79	78	68
Derating on uninterrupted current	[%]	100	99	98	94	93	90

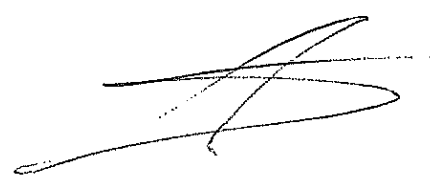

Construction characteristics

Distinguishing features of the series



1

Electromagnetic compatibility

Operation of the protections is guaranteed in the presence of interferences caused by electronic apparatus, atmospheric disturbances or electrical discharges by using the electronic trip units and the electronic residual current releases. No interference with other electronic apparatus near the place of installation is generated either. This is in compliance with the IEC 60947-2 Appendix B + Appendix F Standards and European Directive No. 89/336 regarding EMC - electromagnetic compatibility.

Tropicalisation

Circuit-breakers and accessories in the Tmax series are tested in compliance with the IEC 60068-2-30 Standard, carrying out 2 cycles at 55 °C with the "variant 1" method (clause 7.3.3). The suitability of the Tmax series for use under the most severe environmental conditions is therefore ensured with the hot-humid climate defined in the climatograph 8 of the IEC 60721-2-1 Standards thanks to:

- moulded insulating cases made of synthetic resins reinforced with glass fibres;
- anti-corrosion treatment of the main metallic parts;
- Fe/Zn 12 zinc-plating (ISO 2081) protected by a conversion layer, free from hexavalent-chromium (ROHS-compliant), with the same corrosion resistance guaranteed by ISO 4520 class 2c;
- application of anti-condensation protection for electronic overcurrent releases and relative accessories.

Resistance to shocks and vibrations



Tmax T circuit-breakers are unaffected by vibrations generated mechanically and due to electromagnetic effects, in compliance with the IEC 60068-2-6 Standards and the regulations of the major shipping registers^{(1) (2)}:

- RINA
- Det Norske Veritas
- Bureau Veritas
- Lloyd's register of shipping
- Germanischer Lloyd
- ABS
- Russian Maritime Register of Shipping
- Nippon Kaiji Kyokai.

The T4-T7 Tmax circuit-breakers are also tested, according to the IEC 60068-2-27 Standard, to resist shocks up to 12g for 11 ms. Please ask ABB SACE for higher performances in terms of resistance to shocks.




⁽¹⁾ Ask ABB for specific certifications
⁽²⁾ Except for T6V

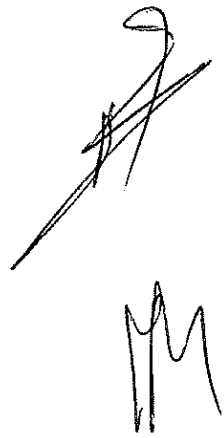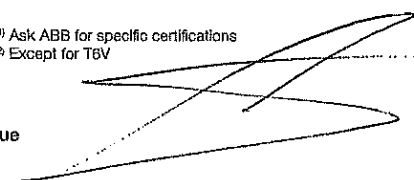

Circuit-breakers for power distribution

General characteristics



The series of Tmax moulded-case circuit-breakers - complying with the IEC 60947-2 Standard - is divided into seven basic sizes, with an application range from 20 A to 1600 A and breaking capacities from 36 kA to 200 kA (at 380/415 V AC). For protection of alternating current networks, the following are available:

- T4 (up to 50 A) circuit-breakers equipped with TMD thermomagnetic trip units with adjustable thermal threshold ($I_1 = 0.7...1 \times I_n$) and fixed magnetic threshold ($I_3 = 10 \times I_n$);
- T5 circuit-breakers, fitted with TMG trip units for long cables and generator protection with adjustable thermal threshold ($I_1 = 0.7...1 \times I_n$) and adjustable magnetic threshold ($I_3 = 2.5...5 \times I_n$) for T5;
- T4, T5 and T6 circuit-breakers with TMA thermomagnetic trip units with adjustable thermal threshold ($I_1 = 0.7...1 \times I_n$) and adjustable magnetic threshold ($I_3 = 5...10 \times I_n$);
- T4, T5 and T6 with PR221DS, PR222DS/P, PR222DS/PD and PR223DS electronic trip units;
- the T7 circuit-breaker, which completes the Tmax family up to 1600 A, fitted with PR231/P, PR232/P, PR331/P and PR332/P electronic trip units. The T7 circuit-breaker is available in the two versions: with manual operating mechanism or motorizable with stored energy operating mechanism⁽¹⁾.

The field of application in alternating current of the Tmax series varies from 20 A to 1600 A with voltages up to 690 V. The Tmax T4, T5 and T6 circuit-breakers equipped with TMF, TMD and TMA thermomagnetic trip units can also be used in direct current plants, with a range of application from 20 A to 800 A and a minimum operating voltage of 24 V DC, according to the appropriate connection diagrams.

The three-pole T4 circuit-breaker can also be fitted with MF and MA adjustable magnetic only trip units, both for applications in alternating current and in direct current, in particular for motor protection (see page 2/40 and following). For all the circuit-breakers in the series, fitted with thermomagnetic and electronic trip units, the single-phase trip current is defined (see page 4/57).

⁽¹⁾ For motorisation, the T7 circuit-breaker with stored energy operating mechanism must be ordered, complete with geared motor for automatic spring charging, opening coil and closing coil.

Interchangeability

The Tmax T4, T5 and T6 circuit-breakers can be equipped either with TMF, TMD, TMG or TMA thermomagnetic trip units, MA magnetic only trip units or PR221DS, PR222DS/P, PR222DS/PD, Ekjp M-LRIU and PR223DS electronic trip units.

Similarly, Tmax T7 can also mount the latest generation PR231/P, PR232/P, PR331/P⁽¹⁾ and PR332/P⁽¹⁾ electronic trip units.


Thanks to their simplicity of assembly, the end customer can change the type of trip unit extremely rapidly, according to their own requirements and needs: in this case, correct assembly is the customer's responsibility. Above all, this means into increased flexibility of use of the circuit-breakers with considerable savings in terms of costs thanks to better rationalisation of stock management.


Trip units

Circuit-breakers	TMD								TMA								TMG			MA							
	20	32	50	80	100	125	160	200	250	320	400	600	630	800	320	400	500	10	25	52	80	100	125	160	200		
T4 250	■	■	■	■	■	■	■	■	■									■	■	■	■	■	■	■	■		
T4 320	▲	▲	▲	▲	▲	▲	▲	▲	▲									▲	▲	▲	▲	▲	▲	▲	▲		
T5 400										■	■				▲	▲											
T5 630										▲	▲	■			▲	▲	▲										
T6 630												■															
T6 800													■														
T6 1000														■													
T7 800																											
T7 1000																											
T7 1250																											
T7 1600																											

■ = Complete circuit-breaker already coded
▲ = Circuit-breaker to be assembled

⁽¹⁾ If ordered loose PR331/P and PR332/P must be completed with the "trip unit adapters" (see page 3/48)

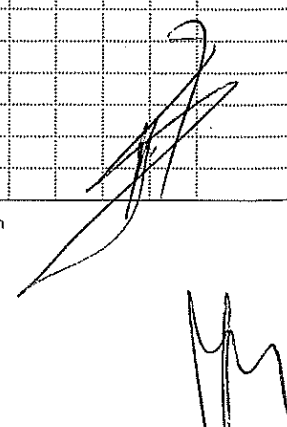



Range of application of the circuit-breakers in alternating current and in direct current



AC	Trip unit	Range [A]
T4 250/320	TMD	20...50
	TMA	80...250
	MA	10...200
	PR221DS	100...320
	PR222DS/P-PR222DS/PD	100...320
	PR223DS	160...320
T5 400/630	TMG	320...500
	TMA	320...500
	PR221DS	320...630
	PR222DS/P-PR222DS/PD	320...630
	Ekip E-LSIG	320...630
T6 630/800/1000	TMA	630...800
	PR221DS	630...1000
	PR222DS/P-PR222DS/PD	630...1000
	PR223DS	630...1000
T7 800/1000/1250/1600	PR231/P-PR232/P	400...1600
	PR331/P-PR332/P	400...1600
DC		
T4 250/320	TMD	20...50
	TMA	80...250
	MA	10...200
T5 400/630	TMA/TMG	320...500
T6 630/800/1000	TMA	630...800

2

MF = magnetic only trip unit with fixed magnetic thresholds
 MA = magnetic only trip unit with adjustable magnetic thresholds
 TMD = thermomagnetic trip unit with adjustable thermal and fixed magnetic thresholds
 TMA = thermomagnetic trip unit with adjustable thermal and magnetic thresholds
 TMG = thermomagnetic trip unit for generator protection
 PR22_, PR23_, PR33_, Ekip_ = electronic trip units

	PR221DS-PR222DS/P-PR222DS/PD-PR223DS ^(*) -Ekip E-LSIG ^(*)							PR231/P ^(*) -PR232/P-PR331/P-PR332/P						
	100	160	250	320	400	630	800	1000	400	630	800	1000	1250	1600
■	■	■												
▲	▲	▲	■											
			■	■										
			▲	▲	■									
					■									
						■								
							■							
								▲	▲	■				
								▲	▲	▲	■			
								▲	▲	▲	▲	■		
								▲	▲	▲	▲	▲	■	

^(*) PR223DS, minimum In = 160 A.
^(*) Interchangeability of PR231/P can be requested by means of the dedicated ordering code 1SDA063140R1
^(*) Ekip E-LSIG only on T5.

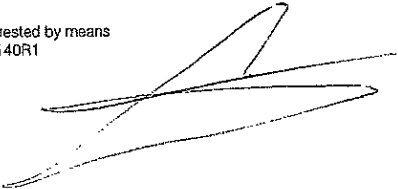

Circuit-breakers for power distribution

Thermomagnetic trip units

2


The Tmax T4, T5 and T6 circuit-breakers can be fitted with thermomagnetic trip units and are used in protection of alternating and direct current networks with a range of use from 20 A to 800 A. They allow the protection against overload with a thermal device realised using the bimetal technique, and protection against short-circuit with a magnetic device.

The four-pole circuit-breakers are always supplied with the neutral protected by the trip unit and with protection of the neutral at 100% of the phase setting.

Thermomagnetic trip units TMD/TMA and TMG (for T4, T5 and T6)

Thermal threshold
Adjustable

Thermal threshold
Adjustable from 0.7 to 1 x I_n

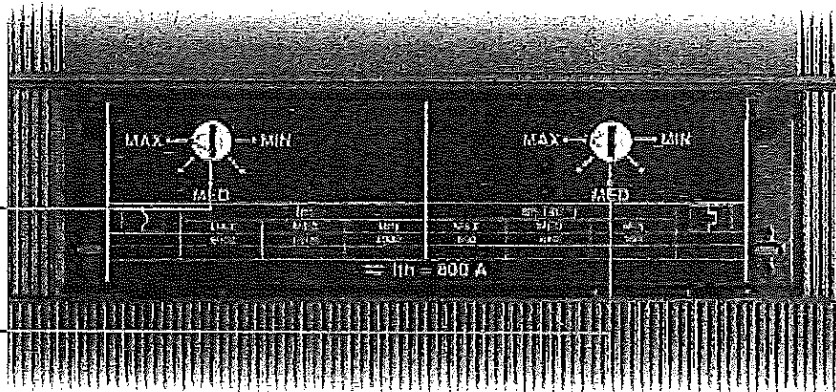

TMA = thermomagnetic trip unit with adjustable thermal threshold ($I_{th} = 0.7...1 \times I_n$) and adjustable magnetic threshold ($I_m = 5...10 \times I_n$)
 TMG (for T5) = thermomagnetic trip unit with adjustable thermal threshold ($I_{th} = 0.7...1 \times I_n$) and adjustable magnetic threshold ($I_m = 2.5...5 \times I_n$)

TMD/TMA - T4

	In [A]	20	32	50	80	100	125	160	200	250
	Neutral [A] - 100%	20	32	50	80	100	125	160	200	250
	Neutral [A] - 50%	-	-	-	-	-	80	100	125	160
$I_1 = 0.7...1 \times I_n$										
	$I_s = 10 \times I_n$ [A]	320	320	500						
	$I_s = 5...10 \times I_n$ [A]				400...800	500...1000	625...1250	800...1600	1000...2000	1250...2500
	Neutral [A] - 100%	320	320	500	400...800	500...1000	625...1250	800...1600	1000...2000	1250...2500
$I_s = 5...10 \times I_n$										
	Neutral [A] - 50%	-	-	-	-	-	400...800	500...1000	625...1250	800...1600

2

TMA - T5

	In [A]	320	400	500
	Neutral [A] - 100%	320	400	500
	Neutral [A] - 50%	200	250	320
$I_1 = 0.7...1 \times I_n$				
	I_s [A]	1600...3200	2000...4000	2500...5000
	Neutral [A] - 100%	1600...3200	2000...4000	2500...5000
	Neutral [A] - 50%	1000...2000	1250...2500	1600...3200
$I_s = 5...10 \times I_n$				

TMG - T5

	In [A]	320	400	500
	Neutral [A] - 100%	320	400	500
	Neutral [A] - 50%			
$I_1 = 0.7...1 \times I_n$				
	I_s [A]	800...1600	1000...2000	1250...2500
	Neutral [A] - 100%	800...1600	1000...2000	1250...2500
	Neutral [A] - 50%			
$I_s = 2.5...5 \times I_n$				

TMA - T6

	In [A]	630	800
	Neutral [A] - 100%	630	800
	Neutral [A] - 50%	400	500
$I_1 = 0.7...1 \times I_n$			
	I_s [A]	3150...6300	4000...8000
	Neutral [A] - 100%	3150...6300	4000...8000
	Neutral [A] - 50%	2000...4000	2500...5000
$I_s = 5...10 \times I_n$			

Notes

- In identifies the setting current for protection of the phases (L1, L2 and L3) and of the neutral.
- The TMA and TMG thermomagnetic trip units which equip the Tmax T4, T5 and T6 circuit-breakers have the thermal element with adjustable threshold $I_1 = 0.7...1 \times I_n$. The set current value which is obtained using the special selector is intended at 40 °C. The magnetic element has adjustable trip threshold ($I_s = 5...10 \times I_n$ for TMA and $I_s = 2.5...5 \times I_n$ for TMG) with a tolerance of $\pm 20\%$ according to what is indicated in the IEC 60947-2 (par. 8.3.3.1.2) Standard. The trip thresholds of the magnetic protection I_s are a function of the setting used both by the phase and neutral protection.

Basic protection functions

	(L) Protection against overload This protection function trips when there is an overload with inverse long-time delay trip according to the IEC 60947-2 Standard ($I^2t=k$). The protection cannot be excluded.
	(S) Protection against short-circuit with time delay This protection function trips when there is a short-circuit, with long inverse time-delay trip ($I^2t=k$ ON) or a constant trip time ($I^2t=k$ OFF). The protection can be excluded.
	(I) Instantaneous protection against short-circuit This protection function trips instantaneously in case of a short-circuit. The protection can be excluded.
	(G) Protection against earth fault The protection against earth fault trips when the vectorial sum of the currents passing through the current sensors exceeds the set threshold value, with long inverse time-delay trip ($I^2t=k$ ON) or a constant trip time ($I^2t=k$ OFF). The protection can be excluded.

2

Advanced protection functions

The PR332/P trip unit makes it possible to carry out highly developed protection against the most varied types of fault.

In fact, it adds the following advanced protection functions to the basic protection functions.

	(L) Protection against overload (IEC 60255-3) This protection trips in case of an overload with inverse long-time delay according to IEC 60255-3 Standard, for the coordination with fuses and MV protections. The protection can be excluded.
	(U) Protection against unbalanced phase The protection function against unbalanced phase U can be used in those cases where a particularly precise control is needed regarding missing and/or unbalance of the phase currents. The trip time is instantaneous. The protection can be excluded.
	(OT) Protection against overtemperature The protection against overtemperature trips instantaneously when the temperature inside the trip unit exceeds 85 °C, in order to prevent any temporary or continual malfunction of the microprocessor. The protection cannot be excluded.
	(Rc) Protection against residual current ⁽¹⁾ This integrated protection is based on current measurements made by an external toroid and is alternative to protection against earth fault G. The protection can be excluded.
	(ZS) Zone selectivity ⁽²⁾ ZS zone selectivity is an advanced method for carrying out coordination of the protections in order to reduce the trip times of the protection closest to the fault in relation to the time foreseen by time selectivity. Zone selectivity can be applied to the protection functions S and G, with constant time-delay trip. The protection can be excluded.
	(UV, OV, RV) Protections against voltage The three protections trip with a constant time-delay in the case of undervoltage, overvoltage and residual voltage respectively. The latter allows to detect interruptions of the neutral (or of the earthing conductor in systems with earthed neutral) and faults which cause movement of the star centre in systems with isolated neutral (e.g. large earth faults) to be identified. Movement of the star centre is calculated by vectorially summing the phase voltages. The protections can be excluded.
	(RP) Protection against reversal of power The protection against reversal power causes tripping of the breaker, with constant time-delay trip, when the flow of power reverses sign and exceeds, as an absolute value, the set threshold. It is particularly suitable for protection of large machines such as generators. The protection can be excluded.
	(UF, OF) Protections of frequency The two protections detect the variation in network frequency above or below the adjustable thresholds, opening the circuit-breaker, with constant time-delay trip. The protection can be excluded.

⁽¹⁾ It is not suitable for human protection.

⁽²⁾ For further information about zone selectivity, please see the section "Circuit-breakers for zone selectivity".

Circuit-breaker for zone selectivity

Electrical characteristics

Zone selectivity

		T4	T5	T6	T7				
Rated uninterrupted current	[A]	250/320	400/630	630/800/1000	800/1000/1250/1600				
Poles	[No.]	3/4	3/4	3/4	3/4				
Rated service voltage, Ue	(AC) 50-60 Hz [V]	690	690	690	690				
	(DC) [V]	750	750	750	750				
Rated impulse withstand voltage, UImp	[kV]	8	8	8	8				
Rated insulation voltage, Ui	[V]	1000	1000	1000	1000				
Test voltage at industrial frequency for 1 min.	[V]	3500	3500	3500	3500				
Rated ultimate short-circuit breaking capacity, Icu		L	L	L	S	H	L	V ⁽¹⁾	
	(AC) 50-60 Hz 220/230 V	[kA]	200	200	200	85	100	200	200
	(AC) 50-60 Hz 380/415 V	[kA]	120	120	100	50	70	120	150
	(AC) 50-60 Hz 440 V	[kA]	100	100	80	50	65	100	130
	(AC) 50-60 Hz 500 V	[kA]	85	85	65	40	50	85	100
	(AC) 50-60 Hz 690 V	[kA]	70	70	30	30	42	50	60
	(AC) 50-60 Hz 1000 V	[kA]	16	16	-	-	-	-	-
	Rated service short-circuit breaking capacity, Ics								
(AC) 50-60 Hz 220/230 V		[%Icu]	100%	100%	75%	100%	100%	100%	100%
(AC) 50-60 Hz 380/415 V		[%Icu]	100%	100%	75%	100%	100%	100%	100%
(AC) 50-60 Hz 440 V		[%Icu]	100%	100%	75%	100%	100%	100%	100%
(AC) 50-60 Hz 500 V		[%Icu]	100%	100% ⁽²⁾	75%	100%	100%	75%	100%
(AC) 50-60 Hz 690 V		[%Icu]	100%	100% ⁽²⁾	75%	100%	75%	75%	75%
(AC) 50-60 Hz 1000 V		[%Icu]	50%	25%	-	-	-	-	-
Rated short-circuit making capacity, Icm									
	(AC) 50-60 Hz 220/230 V	[kA]	440	440	440	187	220	440	440
	(AC) 50-60 Hz 380/415 V	[kA]	264	264	220	105	154	264	330
	(AC) 50-60 Hz 440 V	[kA]	220	220	176	105	143	220	286
	(AC) 50-60 Hz 500 V	[kA]	187	187	143	84	105	187	220
	(AC) 50-60 Hz 690 V	[kA]	154	154	63	63	88.2	105	132
	(AC) 50-60 Hz 1000 V	[kA]	32	32	-	-	-	-	-
	Utilisation category (IEC 60947-2)		A	B (400A) ⁽⁴⁾ - A (630A)	B (630A - 800A) ⁽⁵⁾ - A (1000A)	B ⁽⁶⁾			
Isolation behaviour		■	■	■	■				
Reference Standard		IEC 60947-2	IEC 60947-2	IEC 60947-2	IEC 60947-2				
Trip unit:	electronic PR223EF	■	■	■	■				
	PRS32/P	-	-	-	■				
Versions		F-P-W ⁽⁷⁾	F-P-W ⁽⁷⁾	F-W	F-W				
Terminals	fixed	F-FC Cu-FC CuAl-EF-ES-R-MC ⁽⁸⁾	F-FC Cu-FC CuAl-EF-ES-R ⁽⁸⁾	F-FC CuAl-EF-ES-R-RC	F-EF-ES-FC CuAl-HR/VR				
	plug-in	EF-ES-HR-VR-FC Cu-FC CuAl	EF-ES-HR-VR-FC Cu-FC CuAl	-	-				
	withdrawable	EF-ES-HR-VR-FC Cu-FC CuAl	EF-ES-HR-VR-FC Cu-FC CuAl	EF-HR-VR	EF-HR/VR-ES-RS				
Mechanical life	[No. operations]	20000	20000	20000	10000				
	[No. Hourly operations]	240	120	120	60				
Electrical life @ 415 V AC	[No. operations]	8000 (250A) - 6000 (320A)	7000 (630A) - 5000 (800A)	7000 (630A) - 5000 (800A) - 4000 (1000A)	2000 (S, H, L versions) - 3000 (V version)				
	[No. Hourly operations]	120	60	60	60				
Basic dimensions - fixed version	3 poles	W [mm]	105	140	210	210			
	4 poles	W [mm]	140	184	280	280			
		D [mm]	103,5	103,5	103,5	154 (manual)/178 (motorizable)			
		H [mm]	205	205	268	268			
Weight	fixed	3/4 poles [kg]	2.35/3.05	3.24/4.15	9.5/12	9.7/12.5 (manual)/11/14 (motorizable)			
		plug-in 3/4 poles [kg]	3.6/4.65	5.15/6.65	-	-			
	withdrawable 3/4 poles [kg]	3.85/4.9	5.4/6.9	12.1/15.1	29.7/39.6 (manual)/32/42.6 (motorizable)				

TERMINAL CAPTION
 EF = Front extended
 F = Front
 ES = Front extended spread
 R = Rear orientated
 MC = Multi-cable

HR = Rear flat horizontal
 VR = Rear flat vertical
 HR/VR = Rear flat horizontal/vertical
 F = Fixed circuit-breaker
 P = Plug-in circuit-breaker
 W = Withdrawable circuit-breaker

⁽¹⁾ Only for T7 800/1000/1250 A
⁽²⁾ 75% for T6 630
⁽³⁾ 50% for T5 630
⁽⁴⁾ Only up to 630 V, I_{cw} = 5 kA
⁽⁵⁾ I_{cw} = 7.5 kA (630 A) - 10 kA (800 A)


⁽⁶⁾ I_{cw} = 20 kA (S, H, L versions) - 15 kA (V version)
⁽⁷⁾ For applications at 1000 V, only available in the fixed version
⁽⁸⁾ For applications at 1000 V, only available with Fc Cu terminals

Note: In the plug-in/withdrawable version of T5 630 the maximum rated current is derated by 10% at 40 °C.

Circuit-breaker for zone selectivity

General characteristics

2

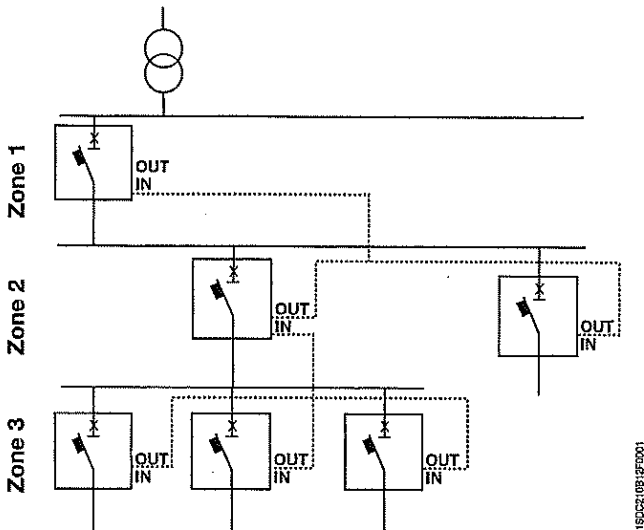

1SDC21081P5001

This type of coordination, a development of time coordination, is made by means of logic connections between current measuring devices which, once the set threshold having been exceeded is detected, allow just the fault area to be identified and to have its power supply cut off.

By means of zone selectivity it is possible obtain selectivity considerably reducing the trip times and therefore the thermal stresses all the plant components are subjected to during the fault.

Making the protection is done by connecting all the zone selectivity outputs of the trip units belonging to the same zone to each other and taking this signal to the zone selectivity input of the trip unit immediately to the supply side. By means

of a simple shielded twisted-pairwire (maximum length of 200 m), each circuit-breaker which detects a fault communicates this to the one on the supply side sending a timed locking signal. The circuit-breaker which does not receive any communication from those on the load side, sends the opening command within the set selectivity time. Zone selectivity can be activated for Tmax circuit-breakers in the case where:

- there is a source of 24 V auxiliary power supply;
- the Tmax T4, T5 or T6 circuit-breaker is equipped with the PR223EF trip unit (EFDZ zone selectivity) or Tmax T7 equipped with the PR332/P trip unit (ZS zone selectivity).

Current sensors

	In [A]	160	250	320	400	630	800	1000	1250	1600
PR223EF	T4 250	■	■							
	T4 320			■						
	T5 400			■	■					
	T5 630					■				
	T6 630					■				
	T6 800						■			
	T6 1000							■		
PR332/P	T7 800				▲	▲	■			
	T7 1000				▲	▲	■	■		
	T7 1250				▲	▲	▲	▲	■	
	T7 1600				▲	▲	▲	▲	▲	■

■ = Complete circuit-breaker already coded
 ▲ = Circuit-breaker to be assembled

For further information on zone selectivity, please consult the section: "Characteristic curves and technical information" on page 4/74.

Accessories

Versions and types

Starting from the fixed version with front terminals, the Tmax circuit-breakers can be converted into the various versions (plug-in for T4 and T5; withdrawable for T4, T5, T6 and T7), using the conversion kits. This makes management of the product, its versions and stocks as a whole very flexible. In any case, it is always possible to request the circuit-breaker in the desired version completely preset in the factory, by ordering, on the same line, the fixed circuit-breaker and the conversion kit, to which must be added the fixed part.


T7 is available in two different versions: the lever operating mechanism version similar to the other sizes in the Tmax family, and the new motorizable version.

3

Fixed

The Tmax FIXED three-pole or four-pole version circuit-breakers foresee:

- circuit-breakers characterised by just two depths up to 1000 A: 103.5 mm for Tmax T4, T5 and T6. For T7 the depth varies according to the type of operating mechanism (with lever or spring charging motor)
- flange for compartment door
- thermomagnetic (on Tmax T4, T5 and T6) or electronic (on Tmax T4, T5, T6 and T7) trip units
- standard F type (front) on all the Tmax family sizes.




Plug-in

The PLUG-IN version of the circuit-breaker (Tmax T4 and T5) consists of:

- fixed part to be installed directly on the back plate of the unit
- moving part obtained from the fixed circuit-breaker with addition of the isolating contacts (near the connection terminals), of the rear frame (for fixing to the fixed part) and of the terminal covers.

The circuit-breaker is racked out by unscrewing the top and bottom fixing screws. A special lock prevents circuit-breaker racking in and racking out with the contacts in the closed position.

In the case where the circuit-breaker has electrical accessories mounted (SOR, UVR, MOE, MOE-E, AUX, AUX-E, AUE, RC222), the socket-plug connectors or the adapters for isolation of the relative auxiliary circuits must also be ordered (see page 3/30).



Accessories

Connection terminals

Front terminals - F

Allow connection of busbars or cables terminated with cable terminal.




1SDC210C28F001

3


Type	Version	Pieces	Busbars/cable terminal [mm]				Tightening [Nm]	Terminal covers			Phase separators
			W	H	D	Ø		high	low	fixed part	
T4	F	1	25	9.5	8	8.5	18	R	R	-	R
T5	F	1	35	11	10 ⁽¹⁾	10.5	28	R	R	-	R
T6 630	F	2	40	12	5	2x7	9	R	R	-	R
T6 800	F	2	40	12	5	2x7	9	R	R	-	R
T7 1250 ⁽²⁾	F	2	50	20	8	2x11	18	-	R	-	R
T7 1600	F	2	50	20	10	2x11	18	-	R	-	R

⁽¹⁾ minimum 5 mm

⁽²⁾ up to 1250 A



1SDC210C28F001



1SDC210C28F001

Front extended terminals - EF

Allow connection of busbars or cables terminated with cable terminal.




1SDC210C28F001

Type	Version	Pieces	Busbars [mm]			Cable terminal [mm]		Tightening [Nm]		Terminal covers			Phase separators
			W	D	Ø	W	Ø	A	B ⁽¹⁾	high	low	fixed part	
T4	F	1	20	10	10	20	10	18	18	R	-	-	S
	P-W	1	20	10	8	20	8	-	9	-	-	R	R
T5	F	2	30	7	11	30	11	28	18	R	-	-	S
	P-W	2	30	15	10	30	10	-	18	-	-	R	R ⁽⁷⁾
T6 630	F-W	2	40	5	11 ⁽²⁾	40	11 ⁽²⁾	9	18	R	R	R	R
T6 800	F-W	2	50	5	14	50	14	9	30	-	R	R	R
T6 1000	F	2	50	6	14	50	14	9	30	-	-	-	-
T7 1250 ⁽³⁾	F-W	2	50	8	4x11 ⁽⁴⁾	-	-	18 ⁽⁵⁾	40 ⁽⁶⁾	-	R	-	S
T7 1600	F-W	2	50	10	4x11 ⁽⁴⁾	-	-	18 ⁽⁵⁾	40 ⁽⁶⁾	-	R	-	S


⁽¹⁾ class 4.8 screws (not supplied)
⁽²⁾ 14 mm for W

⁽³⁾ up to 1250 A, not available on Tmax T7X
⁽⁴⁾ only use two holes diagonally


⁽⁵⁾ 12 Nm onto fixed part of withdrawable circuit-breaker
⁽⁶⁾ class 8.8 screws (not supplied)
⁽⁷⁾ Standard for T5 630



1SDC210C28F001



1SDC210C28F001



A = Tightening the terminal onto the circuit-breaker
B = Tightening the cable/busbar onto the terminal
R = On request
S = Standard
Pieces = Number of busbars, cables or cable terminals

Front extended spread terminals - ES

Allow connection of busbars or cables terminated with cable terminal.




Type	Version	Pieces	Busbars [mm]			Cable terminal [mm]		Tightening [Nm]		Terminal covers			Phase separators
			W	P	Ø	W	Ø	A	B ⁽¹⁾	high	low	fixed part	
T4	F	1	30	6	10.5	30	10.5	18	18	-	-	-	S
T5	F-P ⁽²⁾ -W ⁽²⁾	1	40	10	11	11	11	28	18	-	-	-	S
T6	F	1	80	5	3x13	3x45	13	9	30	-	-	-	-
T7	F	2	50	10	3x13	4x45	13	18	40	-	-	-	S
	W	2	80	6	3x13	4x45	13	40	40	-	-	-	-

3


⁽¹⁾ class 4.8 screws (not supplied)

⁽²⁾ for T5 630 only






Front terminals for copper cables - FC Cu

Allow connection of bare copper cables directly to the circuit-breaker.



Type	Assembly	Version	Pieces	Cable [mm ²]		Flexible busbars W x S x N ⁽¹⁾	Tightening [Nm]		Ø [mm]	Terminal covers			Phase separators
				rigid	flexible		A	B		high	low	fixed part	
T4	standard	F-P-W	1	2.5...185	2.5...120	15.5x0.8x10	-	10	18	R	R	S	R
	standard	F-P-W	2	-	2.5...95	-	-	10	18	R	R	S	R
T5	standard	F-P-W	1	16...300	16...240	24x1x10	-	25	28	R	R	S	R
	external	F	2	120...240	-	-	18	25	-	S	-	-	-

⁽¹⁾ W = width; S = thickness; N = n. of bars



A = Tightening the terminal onto the circuit-breaker
 B = Tightening the cable/busbar onto the terminal
 R = On request
 S = Standard
 Pieces = Number of busbars, cables or cable terminals

SOR - Electrical characteristics

Version	Inrush power consumption			
	Tmax T4, T5, T6		Tmax T7	
	AC [VA]	DC [W]	AC [VA]	DC [W]
12 V DC		150		
24 V AC/DC			430	430
24...30 V AC/DC	150	150		
30 V AC/DC			300	300
48 V AC/DC			300	300
48...60 V AC/DC	150	150		
60 V AC/DC			300	300
110...120 V AC/DC			300	300
120...127 V AC/DC			300	300
110...127 V AC - 110...125 V DC	150	150		
220...240 V AC/DC			300	300
220...240 V AC - 220...250 V DC	150	150		
240...250 V AC/DC			300	300
380...400 V AC			300	
380...440 V AC	150			
415...440 V AC			300	
480...525 V AC	150			
Opening times [ms]	15	15	50	50

3

Shunt opening release with permanent service – PS-SOR

Furthermore, for T4, T5 and T6, opening coils with permanent service (PS-SOR) are available, with much lower power consumption and which can be supplied continuously: in this case, in fact, they are not fitted with auxiliary limit contact. The pre-cabled or uncabled version can be chosen for these coils as well.



PS-SOR - Electrical characteristics

Version	Tmax T4, T5, T6	
	AC [VA]	DC [W]
24 V AC/DC	4	4
110...120 V AC	4	-

Trip curves for power distribution Circuit-breakers with electronic trip units



Tmax T5 Ekip E
L-S-I Functions

Tmax T5 Ekip E
L-S-I Functions

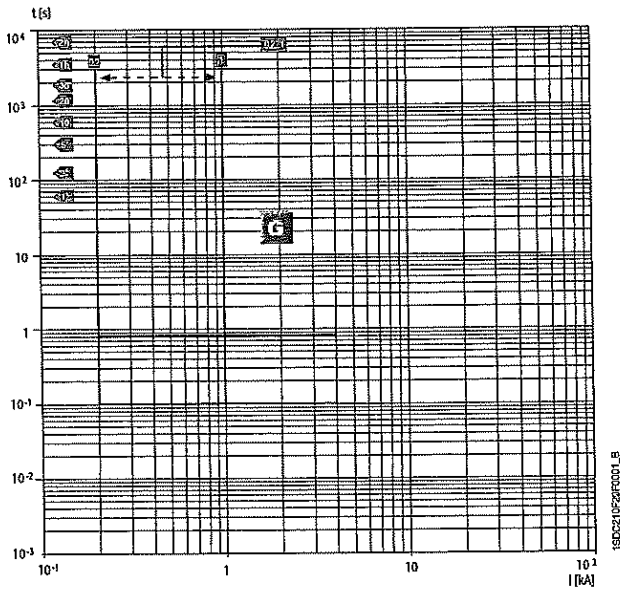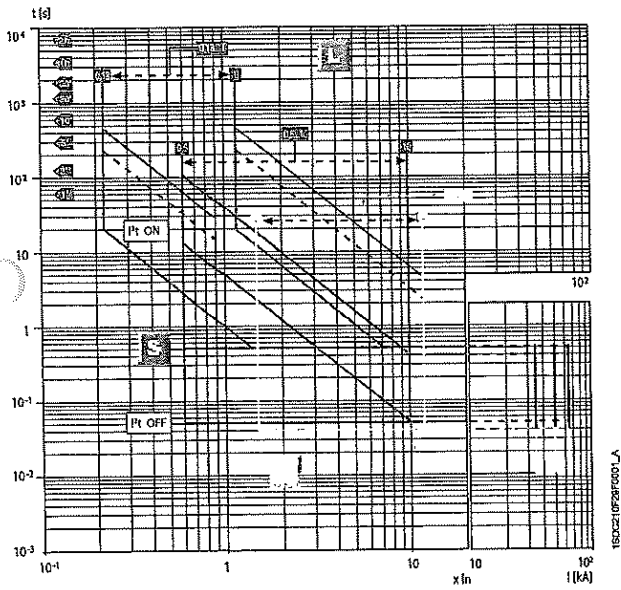

T7 800/1000/1250/1600 - PR231/P
L-I Functions

T7 800/1000/1250/1600 - PR231/P
L-S Functions

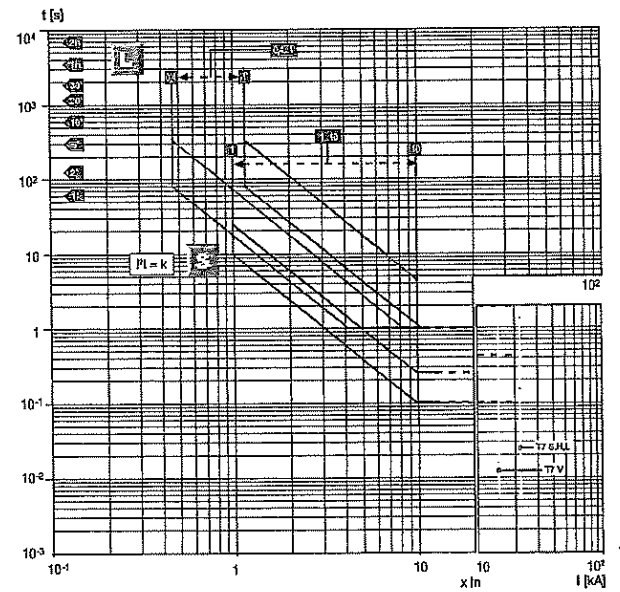
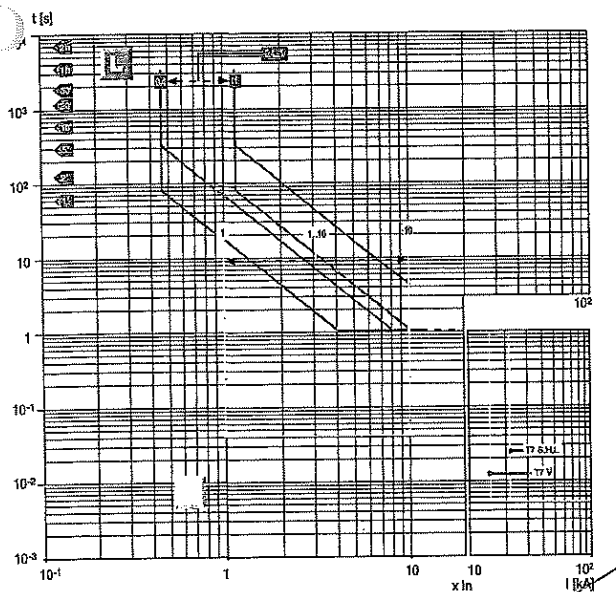


Trip curves for power distribution Circuit-breakers with thermomagnetic trip units



T4 250 – TMA
In = 80÷250 A





T5 400/630 – TMA
In = 320÷500 A

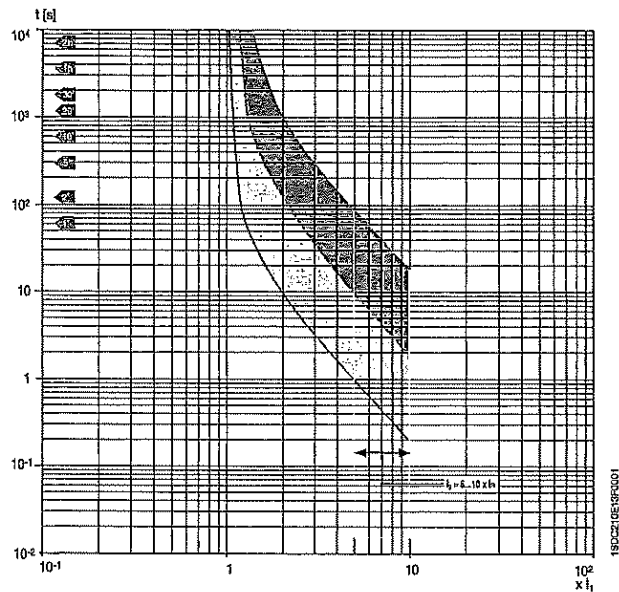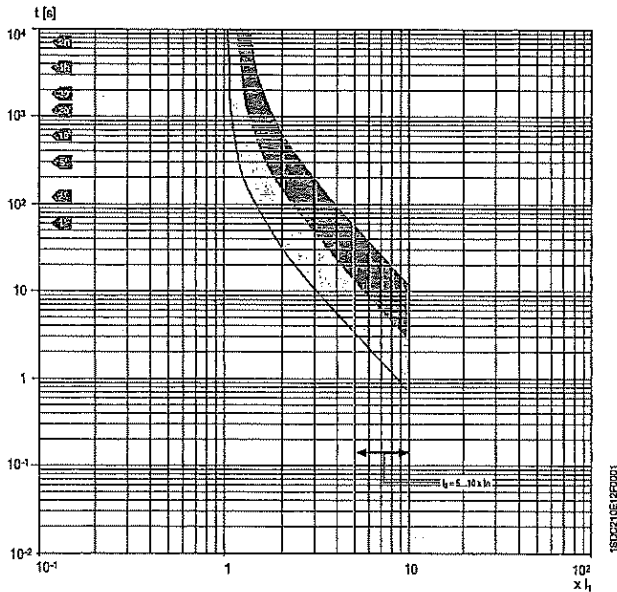

4

T5 400/630 – TMG
In = 320÷500 A

T6 630 – TMA
In = 630 A

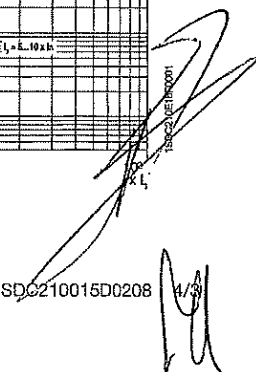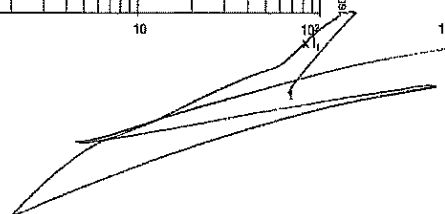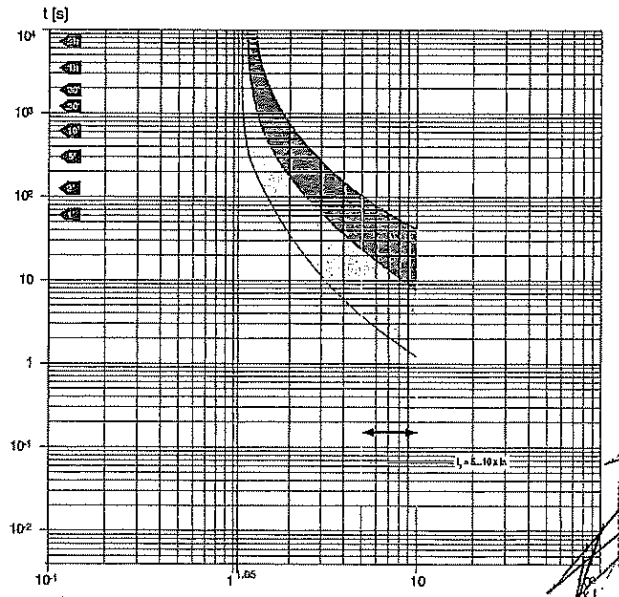
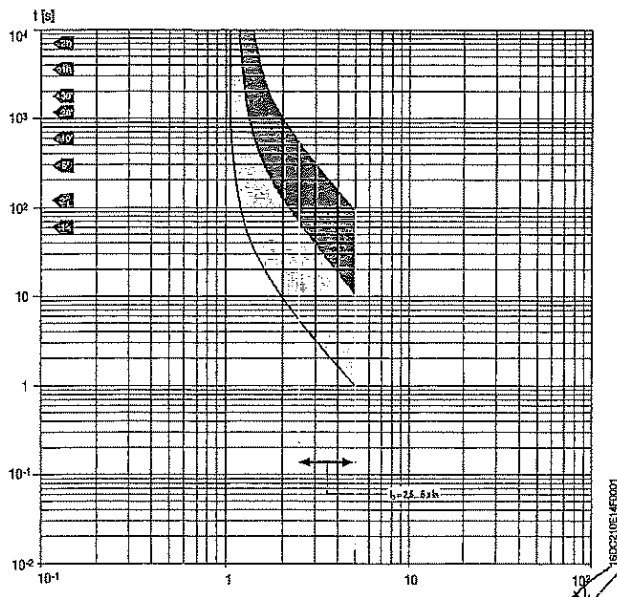


Limitation curves

Handwritten signature



T5 400/630
690 V

T6 630/800/1000
690 V

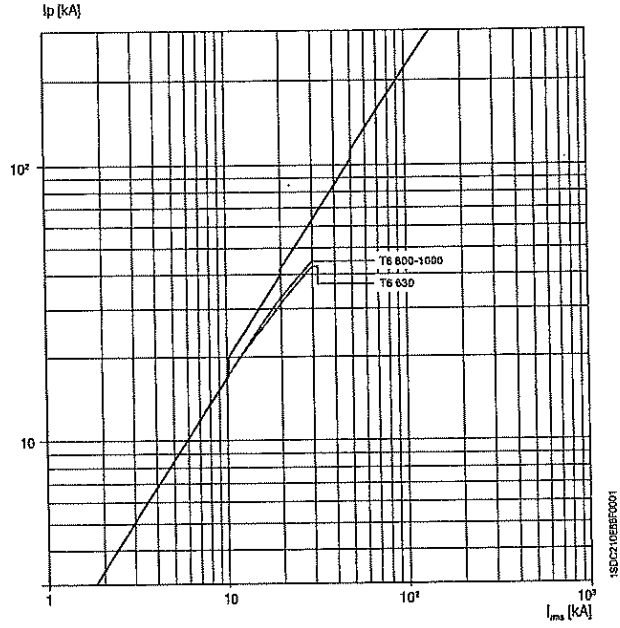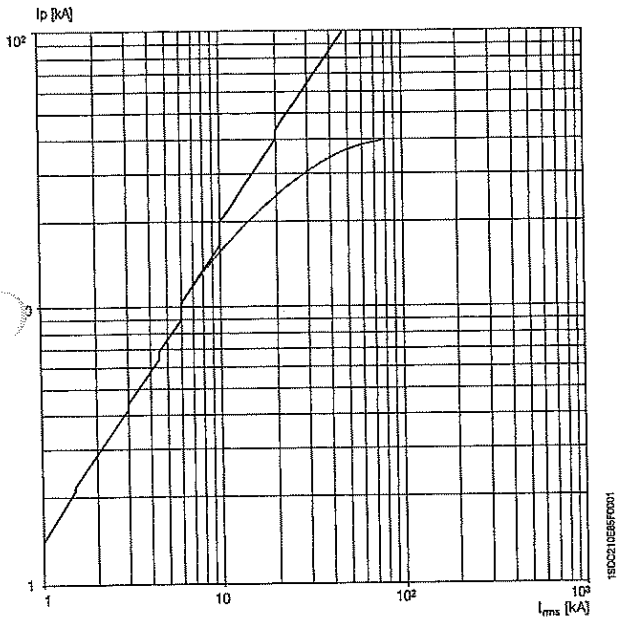

T6 V 630/800
690 V

T7 800/1000/1250/1600
690 V

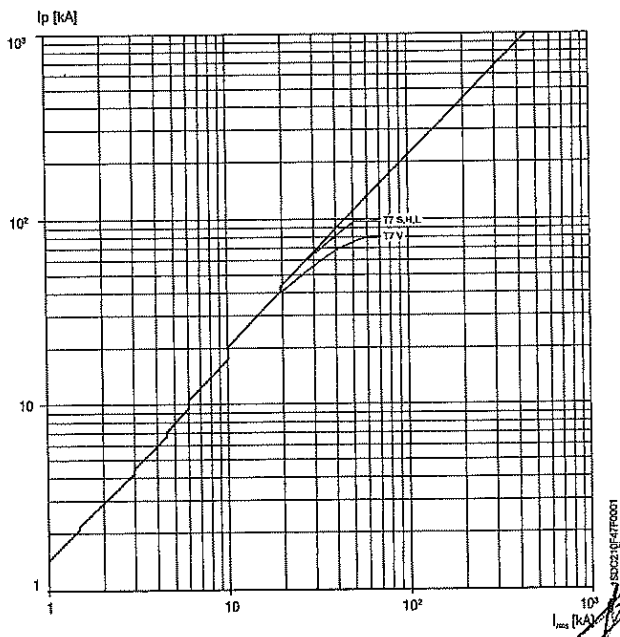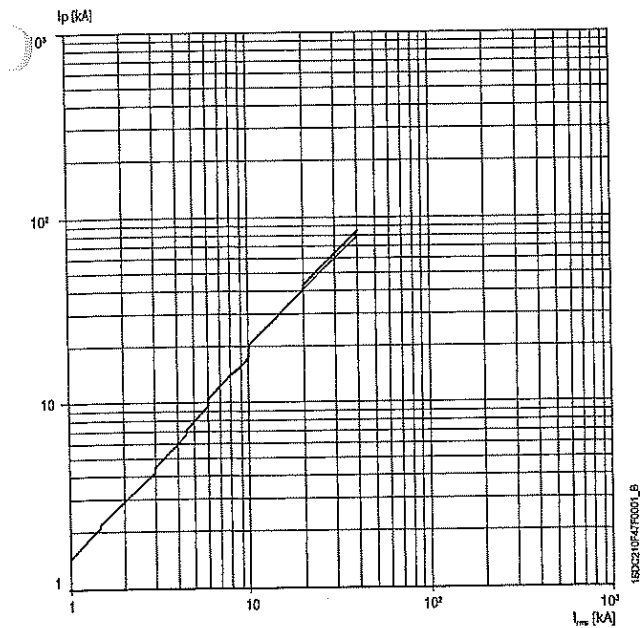

Handwritten signature

Handwritten signature

Contact us

ABB SACE
A division of **ABB S.p.A.**
L.V. Breakers
Via Pescaria, 5
24123 Bergamo – Italy
Phone: +39 035 395 111
Fax: +39 035 395 306-433

www.abb.com


The data and illustrations are not binding. We reserve the right to make changes in the course of technical development of the product.

© Copyright 2016 ABB.
All rights reserved.

1SDC210016D0208 - 2016.05



Stay tuned. Discover more by visiting the webpages reserved to Tmax T and be always up-to-date with the latest edition of the catalogue.

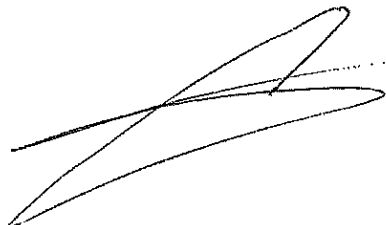

Power and productivity
for a better world™

ABB





ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПАКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОПАРАТУРА-НИ и СРЪН

гр.Петрич 2850, Промислена зона
ул."Свобода"49
тел.:00359 745 60743; факс:00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул."Рихардо Вакарини"бл.5
тел.:00359 2 869 0696; факс:00359 2 956 9334
e-mail:sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.17.2

Техническо описание и чертежи с нанесени на тях размери


*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

Overall dimensions Tmax T5

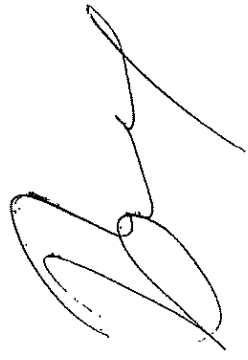


Fixed circuit-breaker


Caption

Fixing on sheet

- ① Overall dimensions with cabled accessories mounted (SOR-C, UVR-C, RC222)
- ② Overall dimensions with cabled auxiliary contacts mounted (only 3Q 1SY)

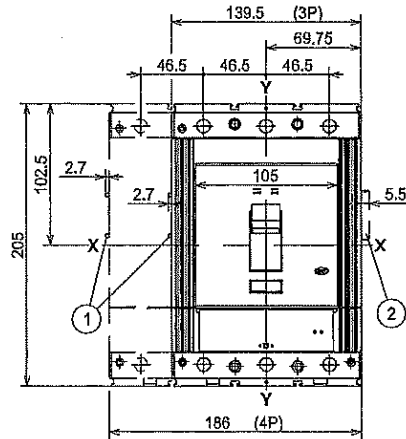


1SDC210H7R0001

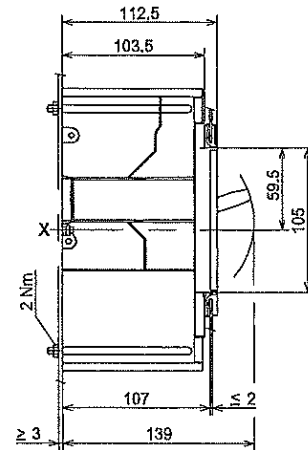

1SDC210H7R0001




Flange for compartment door




1SDC210H7R0001

Drilling templates of the compartment door



1SDC210H7R0001




1SDC210H7R0001

With flange
(3-4 POLES)

Without flange
(3-4 POLES)


Drilling templates for support sheet

For front terminals



1SDC210H7R0001


3 POLES



1SDC210H7R0001


4 POLES

For rear terminals





1SDC210H7R0001

3 POLES



1SDC210H7R0001


4 POLES

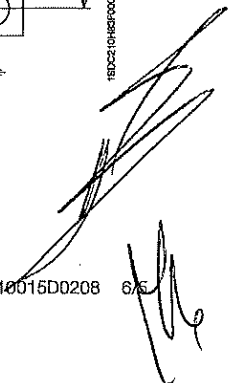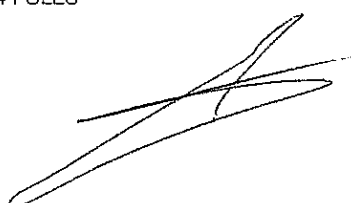

Overall dimensions Tmax T5



Terminals

Front - F

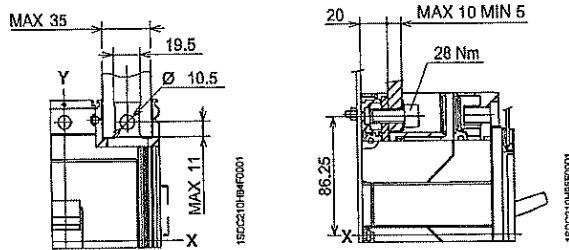



Front for copper cables - FC Cu

Front for copper cables - FC Cu 2x240 mm²

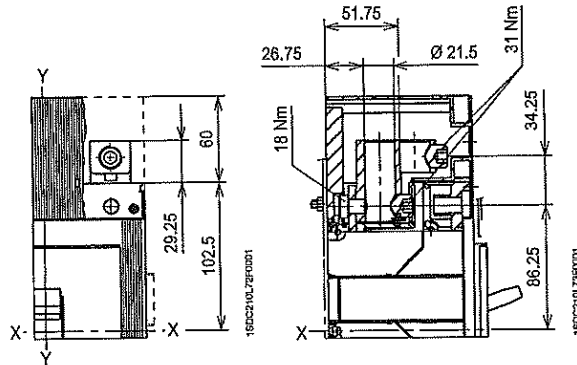

Front for copper/aluminum cables - FC CuAl 2x120 mm²

Front for copper/aluminum cables - FC CuAl 1x240 mm²

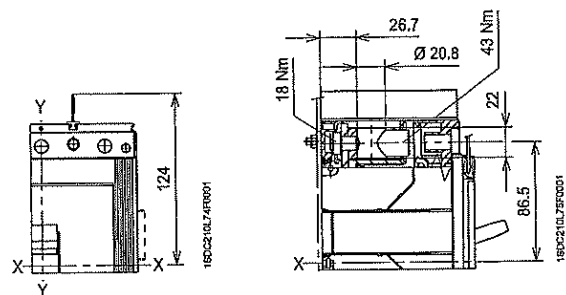
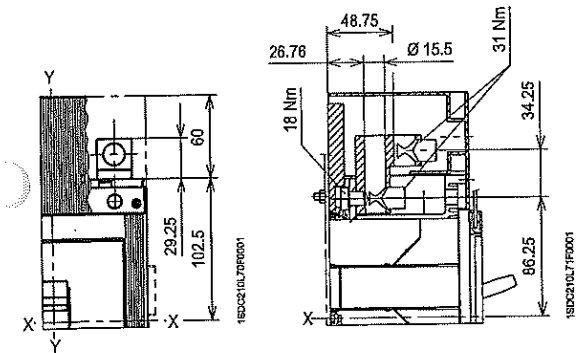


Caption

Front for copper/aluminium cables
- FC CuAl 300 mm²

Front for copper/aluminium cables - FC CuAl 2x240 mm²

- ① High terminal covers with degree of protection IP40

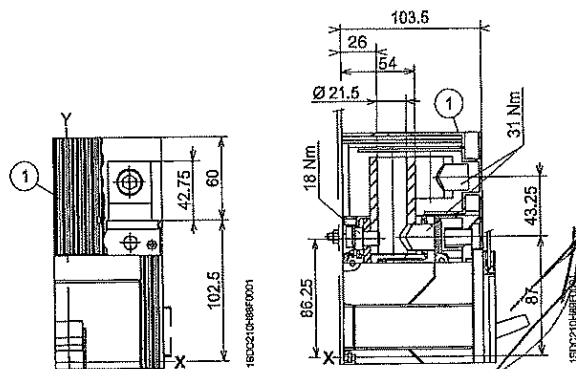


Terminals

Caption

- ① Insulating barriers between phases (compulsory)


Front extended spread - ES

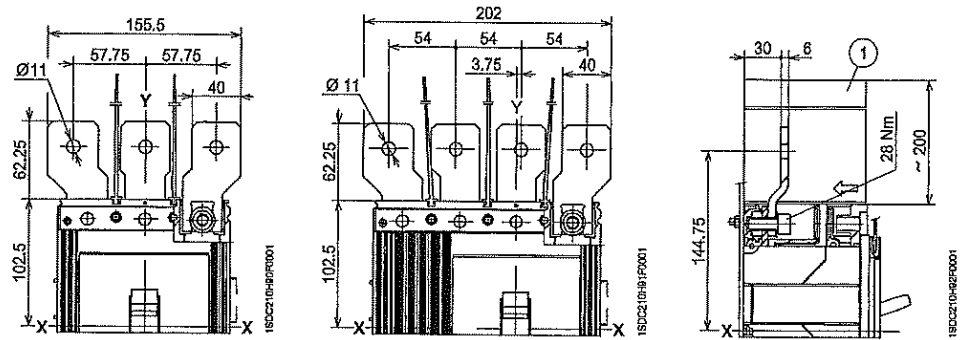

Caption

- ① High terminal covers with degree of protection IP40
- ② Insulating barriers between phases (compulsory without 1)


Front extended - EF

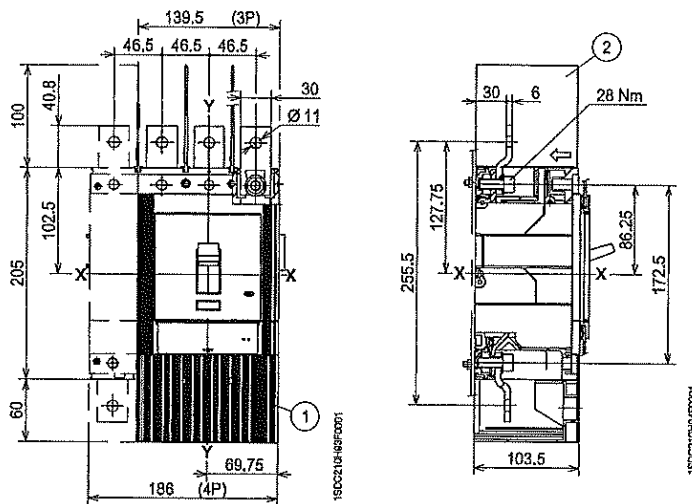

Caption

- ① Low terminal covers with degree of protection IP40

Rear horizontal - R

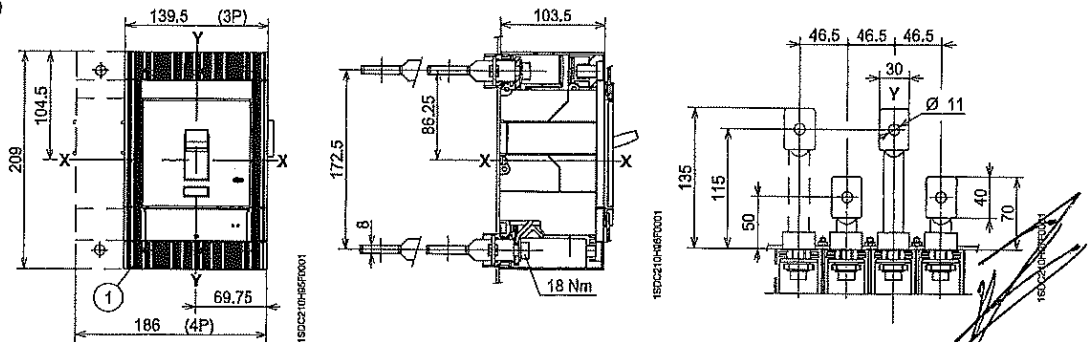



ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПЛЕКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОАПАРАТУРА-НН и СрН

гр.Петрич 2850, Промислова зона
ул."Свобода"49
тел.:00359 745 60743; факс:00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул."Ракоцао Вакрнин"бл.5
тел.:00359 2 669 0696; факс:00359 2 958 9334
e-mail:aaales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026856

ПРИЛОЖЕНИЕ 9.17.3

ЕО декларация за съответствие

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

ABB SACE

ABB

DICHIARAZIONE DI CONFORMITA' DECLARATION OF CONFORMITY

No CETmax 030R0.03



Il sottoscritto, rappresentante il seguente costruttore
The undersigned, representing the following manufacturer

costruttore: <i>manufacturer:</i>	ABB SACE SPA
indirizzo: <i>address:</i>	via Baloni 35 I 24123 Bergamo

dichiara qui di seguito che il prodotto:
herewith declares that the product

Identificazione del prodotto: <i>product identification:</i>	Tmax T5N 630 e relativi accessori <i>and relevant accessories</i>
---	---

risulta in conformità a quanto previsto dalla(e) seguente(i) direttiva(e) comunitaria(e)
is in conformity with the provisions of the following EC directive(s)

riferimento n.ro <i>reference nr.</i>	titolo <i>title</i>
73/23	Direttiva Bassa Tensione <i>Low voltage directive</i>
89/336	Direttiva Compatibilità Elettromagnetica <i>Electromagnetic Compatibility Directive</i>

e che sono state applicate tutte le norme e/o specifiche tecniche indicate sul retro.
and that the standards and/or technical specifications referenced overleaf have been applied

Ultime due cifre dell'anno in cui è stata affissa la marcatura CE: 03
Last two digits of the years in which the CE marking was affixed

Bergamo li 03.03.06

на основании чл. 36а, ал. 3 от 30П

(firma)

(signature) Giovanni Frassinetti R&D Manager – Low Voltage Breakers

(nome e funzione della persona incaricata di firmare per conto del costruttore o suo rappresentante)
(name and function of the signatory empowered to bind the manufacturer or his authorized representative)



DICHIARAZIONE DI CONFORMITA'
DECLARATION OF CONFORMITY

No CE/Tmax 030R0.03

Riferimento relativo alle norme e/o specifiche tecniche, o parti di esse, utilizzate per la presente dichiarazione di conformità:

References of standards and/or technical specifications applied for this declaration of conformity, or parts thereof:

- norme armonizzate:

- harmonized standards:

n.ro nr	edizione issue	titolo title	parti parts
EN 60947	1999 (and later)	Low voltage switchgear and controlgear	Part 1: General rules
EN 60947	1996 (and later)	Low voltage switchgear and controlgear	Part 2: Circuit -breakers
EN 50081	1992 (and later)	EMC- Generic Emission standard	Part 1: Residential, commercial and light industry
EN 50081	1993 (and later)	EMC- Generic Emission standard	Part 2: Industrial environment
EN 50082	1997 (and later)	EMC- Generic Immunity standard	Part 1: Residential, commercial and light industry


- altre norme e/o specifiche tecniche:

- other standards and/or technical specifications

n.ro nr	edizione issue	titolo title	parti parts
IEC 60947	Ed.3.2 Consolidated Edition 2001-12 (and later)	Low voltage switchgear and controlgear	Part 1: General rules
IEC 60947	Ed.2.2 Consolidated Edition 2001-11 (and later)	Low voltage switchgear and controlgear	Part 2: Circuit -breakers

ABB SACE

ABB



DICHIARAZIONE DI CONFORMITA'

DECLARATION OF CONFORMITY

No CE\Tmax 030R0.03

- **altre soluzioni tecniche, i cui dettagli sono inclusi nella documentazione tecnica o fascicolo tecnico:**
- *other technical solutions, the details of which are included in the technical documentation or the technical construction file:*

catalogo tecnico 1SDC210004D0901

technical catalogue 1SDC210004D0201

Certificato di gestione della Qualità ISO 9001-2000

ISO 9001 Quality Management System Certificate

Certificato di gestione Ambientale ISO 14001

ISO14001 Environment Management System Certificate

- **altri riferimenti o informazioni richiesti dalla(e) direttiva(e) comunitaria(e) applicabile(i):**
- *other references or information required by the applicable EC directive(s):*



EC Declaration of Conformity
EG Konformitätserklärung
CE Déclaration de conformité
CE Dichiarazione di conformità

This declaration of conformity is issued under the sole responsibility of the manufacturer
Die alleinige Verantwortung für die Ausstellung dieser Konformitätserklärung trägt der Hersteller /
La présente déclaration de conformité est établie sous la seule responsabilité du fabricant /
La presente dichiarazione di conformità è rilasciata sotto la responsabilità esclusiva del fabbricante

ABB SPA – ABB SACE DIVISION
via Baioni 35
I 24123 Bergamo

Object of declaration
Gegenstand der Erklärung / Objet de la déclaration / Oggetto della dichiarazione

Circuit Breaker / Leistungsschalter / Disjoncteur / Interruttore
Switch disconnecter / Sezionatore

Type / Typ / Type / Tipo
Tmax T5
(and relative accessories)

The object of the declaration described above is in conformity with the relevant Community harmonisation legislation
Der oben beschriebene Gegenstand der Erklärung erfüllt die einschlägigen / Harmonisierungsrechtsvorschriften der Gemeinschaft /
L'objet de la déclaration décrit ci-dessus est conforme à la législation communautaire d'harmonisation applicable /
L'oggetto della dichiarazione di cui sopra è conforme alla pertinente normativa comunitaria di armonizzazione

No. 2006/95/EC Low voltage equipment / Niederspannungsrichtlinie / Directive basse tension /
Direttiva Bassa Tensione

No. 2004/108/EC Electromagnetic compatibility / EMV-Richtlinie / Directive CEM / Direttiva
EMC

and are in conformity with the following harmonized standards or other normative documents
nachgewiesen durch die Einhaltung der nachstehend aufgeführten Normen oder anderen normativen Dokumenten /
et justifié par le respect des Normes mentionnées ci-dessous ou autres documents normatifs /
e sono stati applicati le norme o altri documenti normativi indicati di seguito

EN 60947-1: 2007/A1:2011
EN 60947-2: 2006/A2:2013
EN 60947-3: 2009/A1:2012

Year of CE-marking
Jahr der CE-Kennzeichnung / Année d'apposition du marquage CE / Anno in cui è stata affissa la marcatura
2003



Signed for and on behalf of
Unterzeichnet für und im Namen von / Signé par et au nom de / Firmato in vece e per conto di

ABB SpA – ABB Sace Division
Bergamo, October 04th, 2013

Lucio Azzo
R&D Manager на основание чл. 36а, ал. 3 от ЗОП

Document No.: 1SDL000165R0005 Rev: 1

ABB SpA – ABB Sace Division

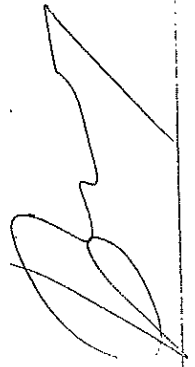



гр.Петрич 2850. Промислена зона
ул. "Свобода" 49
тел.: 00359 745 60743; факс: 00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул. "Рикардо Векарини" бл.5
тел.: 00359 2 869 0696; факс: 00359 2 959 6334
e-mail: sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007
www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.17.4

Протоколи от типови изпитвания на английски или български език, проведени от независима изпитвателна лаборатория – заверени копия, с приложен списък на отделните изпитвания на български език

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД



ASSOCIAZIONE PER LA CERTIFICAZIONE
DELLE APPARECCHIATURE ELETTRICHE

Via Tito Livio, 5 - 24123 - BERGAMO (Italy)

tel. +390354175244 fax. +390354534662 e-mail: acaecert@tin.it



Certificate of Conformity

LOVAG-Certificate No. IT 04.011

Apparatus

Moulded case Three Pole Air-break Independent operation Circuit-breakers
Frame size 400 A - 1000 V (U) · 50/60 Hz · with microprocessor based
overcurrent releases:

$$I_n = 320 \text{ A to } 400 \text{ A}$$

Designation

T5N 400

Manufacturer or responsible vendor

ABB SACE S.p.A. - Via Baioni, 35 · 24123 Bergamo (Italy)

Tested for: ABB SACE S.p.A.

Tested by: ACAE Laboratory IA.01

The apparatus, constructed in accordance with the description mentioned in
the Test Report listed on this Certificate has been subjected to the series of
proving tests in accordance with IEC 60947-2 (1995), Corrigendum (1997)
and IEC 60947-2:1995/A1:1997 EN 60947-2:1996 and
EN 60947-2:1996/A1:1997

The results are shown in the Test Report in accordance to LOVAG. The values
obtained and the general performance are considered to comply with the
above Standard(s) and to justify the characteristic assigned by the manufacturer
as stated below.

Utilization category A

Test sequence: II ($I_{cs} = I_{cu}$)

$$U_p = 440 \text{ V} \quad I_{cs} = I_{cu} = 30 \text{ kA}$$

This document includes Report No.: 03.084

Issue Date: 2004.02.10

Responsible Certification Body: ACAE

на основании чл. 36а, ал. 3 от ЗОП

SINCERT

СЕРТИФИКАТОР

PRDN°070B Rev.00

Signatory of EA and IAF Mutual Recognition Agreements

Mauro Marchi

Authorized Signature

Date: 2004.03.18

This Certificate applies only to
the apparatus tested. The
responsibility for conformity of
any apparatus having the same
designation with that tested
rests with the manufacturer or
responsible vendor.

This certificate has been pre-
pared according to LOVAG
(Low Voltage Agreement Group)
Objectives and Operating Prin-
ciples of mutual recognition.
The responsible certification
body as member of LOVAG
issues a Certificate of Confor-
mity with the above mentioned
Standard(s) following the
exclusive use of LOVAG Test
Instructions wherever
applicable






Only integral reproduction of
this Certificate or reproductions
of this page accompanied by
any page(s) on which are
stated the tests performed and
the assigned rated charac-
teristics of the apparatus
tested, are permitted without
written permission from the
LOVAG Signatory responsible
for this Certificate

LOVAG CERTIFICATES



- LOVAG** is the Low Voltage Agreement Group which is an Agreement Group registered by EOTC the European Organisation for Conformity Assessment, Registration No. 0009. LOVAG's main purpose as an Agreement Group shall be for the mutual recognition of the test reports and/or certificates of conformity by its signatories.
- Membership** LOVAG presently has five signatories to the Agreement, ACAE (Italy), ALPHA (Germany), ASEFA (France), CEBEC (Belgium) and Intertek SEMKO AB (Sweden) and employs around 40 European Testing Laboratories.
- Certificates** LOVAG Certificates are issued by the signatory bodies to the Agreement using test reports and certificates in a common and recognisable format in the market. They are recognised and accepted in the European Economic Area and elsewhere in the world.
- Test Instructions** LOVAG uses common LOVAG Test Instructions for each of the International and European Standards covered by the Agreement and signatories to the Agreement abide by these when testing for LOVAG Certification.
- Qualifications** All signatory bodies to the Agreement are accredited and/or assessed to EN 45011 (ISO/IEC Guide 65) and their laboratories are accredited and/or assessed to EN ISO/IEC 17025.

For further information contact your local certification body from the list below or contact the Secretariat of LOVAG at: ALPHA e.V., Stresemannallee 19, D-60596 Frankfurt am Main, Phone: +49 69 9620 6343. Fax : +49 69 96206344. e-mail: secretariat@lovag.net

LIST OF LOVAG SIGNATORIES:


<p>ACAE Via Tito Livio 5 I-24123 Bergamo ITALY Fax: +39 035 453 4662 e-mail: acaecert@tin.it</p>		<p>CEBEC Avenue Van Kalken 9A Bte 1 B-1070-Brussels BELGIUM Fax: +32 2 556 00 36 e-mail: info@cebec.be</p>	
<p>ALPHA e. V. Stresemannallee 19 D-60596 Frankfurt am Main GERMANY Fax: +49 69 9620 6344 e-mail: office@alpha-cert.de</p>		<p>Intertek SEMKO AB Box 1103, Torshamnsgatan 43 SE-164 22 Kista SWEDEN Fax: +46 8 750 6030 e-mail: lovag@semko.se</p>	
<p>ASEFA 33 av du general teclerc F-92260 Fontenay-aux-roses France Fax: +33 1 40 95 88 18 e-mail: asefa@lclcie.fr</p>			

INSTALLATION INSIDE METAL SCREEN FOR SHORT-CIRCUIT TESTS

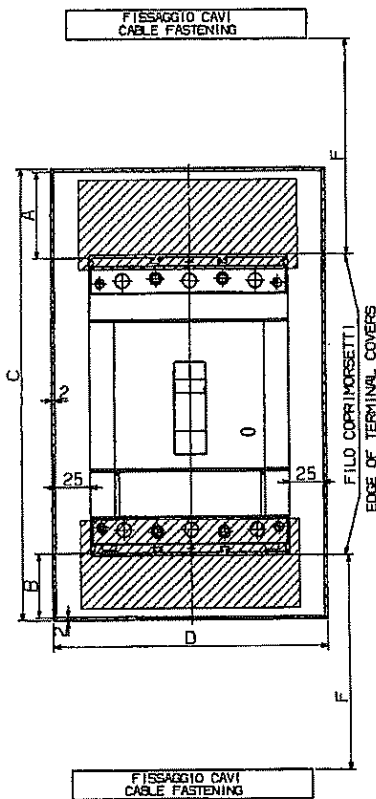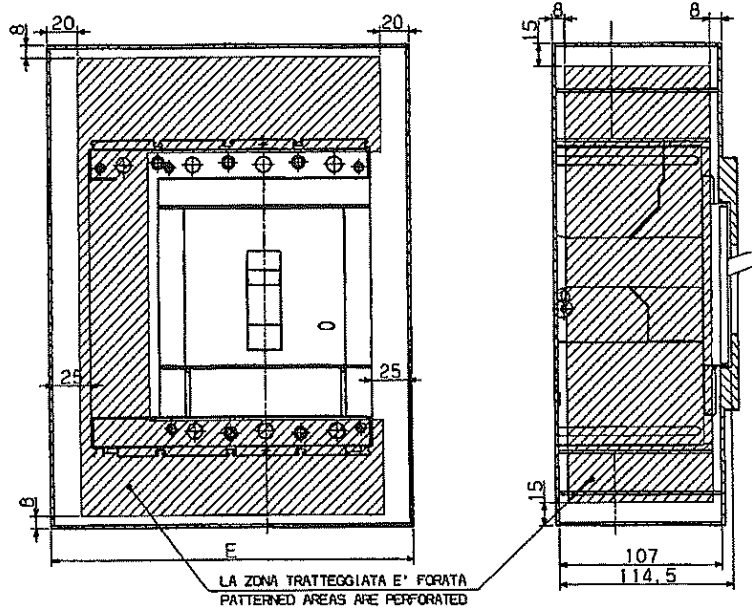

- ⊕ Con Un-690V
Aggiungere piastra posteriore isolante e separatore di fase
- ⊕ When Un-690V
Rear isolating barrier and phase separators should be added

INTER	TENSIONE VOLTAGE	A	B	C	D	E	F	N° DIS
T4	Un<440V	30	25	264	159	194	50	RG0840/000
	Un<440V⊕	60	45	314	159	194	50	
T4	Un<440V	30	25	264	159	194	200	
	Un<440V⊕	60	45	314	159	194	200	
T5 400A	Un<440V	30	25	264	194	240	200	RG0840/001
	Un<440V⊕	60	45	314	194	240	200	
T5 630A	Un<440V	90	85	384	194	240	200	RG0840/500
	Un<440V⊕	120	105	434	194	240	200	



QUOTE FORATURA
PERFORATION GAUGE
LAMIERA FORATA - RAPPORTO
SUP. VUOTA/SUP. TOTALE=0,46
PERFORATED SHEET METAL
HOLLOW-TOTAL SURFACE RATE=0,46

LOVAG		Test report No.: 03.084 Page 10 / 44	
Type test according to: IEC 60947-2 Test sequence II ($I_{cs} = I_{cu}$)		Type: T5N 400	
Standard and clause	Kind of tests and requirements	Test values Results	
	VERIFICATION OF OVERLOAD RELEASES ON EACH POLE SEPARATELY		
60947-1 Table 9, 10 and 11	Cabling characteristics		
	Cable	185 mm ²	185 mm ²
	Bar	- x - mm	- x - mm
	Number	1	1
	Length	2000 mm	2000 mm
	Tightening torque		25 Nm
	Reference temperature	40 °C ± 2 °C	
	Ambient temperature		22 °C
	Correction factor ($k = 1$ for releases independent of ambient temperature) k		-
	Current setting value	I_n	128 A
	Test current		
	either $k \times 2.0 \times I_n$	256 A	256 A
8.3.5.1	Test sequence II ($I_{cs} = I_{cu}$)	before 8.3.4.1	
8.3.5.1	Test sequence III	before 8.3.5.2	
8.3.6.1	Test sequence IV	before 8.3.6.2	
8.3.6.6	Test sequence IV	after 8.3.6.5	
8.3.7.4	Test sequence V	before 8.3.7.5	
8.3.8.1	Combined test sequence	before 8.3.8.2	
A.5	Verification of discrimination	before 8.3.5.2	
A.6.3	Verification of back-up protection	before 8.3.5.2	
	or $k \times 2.5 \times I_n$	- A	- A
8.3.5.4	Test sequence II ($I_{cs} = I_{cu}$)	after 8.3.4.5	
8.3.5.4	Test sequence III	after 8.3.5.3	
8.3.7.8	Test sequence V	after 8.3.7.7	
8.3.8.7	Combined test sequence	after 8.3.8.6	
A.5	Verification of discrimination	after 8.3.5.3	
A.6.3	Verification of back-up protection	after 8.3.5.3	
C.4	Individual pole short-circuit test sequence		
H.4	Test sequence for circuit-breakers for IT-systems		
	Tripping time (for twice the value of current setting on single pole)		
		Ph ₁ ≤ 30 s	28 s
		Ph ₂ ≤ 30 s	28 s
		Ph ₃ ≤ 30 s	29 s


Test laboratory: AGAE TA.01

Rgp

Authorized representative

Date 04.02.10

TRF IEC/EN 60947-2
Ed. 2.1 form 46



LOVAG		Test report No.: 03.084 Page 11 / 44	
Type test according to: IEC 60947-2 Test sequence II (I _{cs} = I _{cu})		Type: T5N 400	
Standard and clause	Kind of tests and requirements	Test values Results	
8.3.4.1 8.3.8.3	TEST OF RATED SERVICE SHORT-CIRCUIT BREAKING CAPACITY		
Table 4	Utilization category	A	
	Rated operational voltage U_e	440 V	
	Recovery voltage	$1.05 \times U_e$	462 V
	Rated service short-circuit breaking capacity I_{cs}	30 kA	30 kA
	Rated ultimate short-circuit breaking capacity I_{cu}	30 kA	
Table 1	Ratio between I_{cs} and I_{cu}	$I_{cs}/I_{cu} = 100 \%$	
Table 11	Power factor	0,25	0,25
	Frequency	50 Hz	50 Hz
8.3.2.1	Control supply voltage	$0.85 \times U_s - V$	- V
7.2.1.1.3	Maximum value of the closing time		- ms
	Sequence of operation	O - t - CO - t - CO	O - t - CO - t - CO
	Circuit diagram		Page 33 / 44
	Calibration of the test circuit	Pageform 169	Page 12 / 44
	Safety area	Pageform 6	Page 7 / 44
	Installation of the material tested	Pageform 6	Page 8 / 44
	Energization direction	Top/Bottom	Top
60947-1 Table 9, 10 and 11	Cabling characteristics		
	Cable	185 mm ²	185 mm ²
	Bar	- x - mm	- x - mm
	Number	1	1
	Length	supply side 500 mm	500 mm
		load side 250 mm	250 mm
	Tightening torque		25 Nm

Test laboratory: ACAE IA.01

Rep

Authorized representative

TRF IEC/EN 60947-2
Ed. 2.1 form 40

Date 04.02.10


LOVAG		Test report No.: 03.084
Type test according to: IEC 60947-2 Test sequence II (Ics = Icu)		Page 13 / 44
Standard and clause	Kind of tests and requirements	Test values Results
	OPERATION „O“	
	Oscillogram	Page 37 / 44
	Peak current value	i_1 11,4 kA
		i_2 26,6 kA
		i_3 19,7 kA
	Maximum total duration	9,0 ms
	Recovery voltage (phase to phase or phase to neutral)	$U_{r(1-2)}$ <input checked="" type="checkbox"/> or $U_{r(1-N)}$ <input type="checkbox"/> 464 V $U_{r(2-3)}$ <input checked="" type="checkbox"/> or $U_{r(2-N)}$ <input type="checkbox"/> 462 V $U_{r(3-1)}$ <input checked="" type="checkbox"/> or $U_{r(3-N)}$ <input type="checkbox"/> 462 V
	Average value	U_{rm} 463 V
	Ratio between U_{rm} and U_e	U_{rm}/U_e 1,05
	Joule integral	Ph_1 478x10 ³ A ² s
		Ph_2 1700x10 ³ A ² s
		Ph_3 1290x10 ³ A ² s
	Melting of the fusible element	Yes/No No
	Holes in the PE-sheet (if applicable)	Yes/No No
	Cracks observed	Yes/No No
	if Yes	Page - / -
	Time interval between operations	3 min 3 min
	OPERATION „CO“	
	Oscillogram	Page 38 / 44
	Applied voltage	463 V
	Peak current value	i_1 17,7 kA
		i_2 15,5 kA
		i_3 26,3 kA
	Maximum total duration	9,2 ms
	Recovery voltage (phase to phase or phase to neutral)	$U_{r(1-2)}$ <input checked="" type="checkbox"/> or $U_{r(1-N)}$ <input type="checkbox"/> 464 V $U_{r(2-3)}$ <input checked="" type="checkbox"/> or $U_{r(2-N)}$ <input type="checkbox"/> 463 V $U_{r(3-1)}$ <input checked="" type="checkbox"/> or $U_{r(3-N)}$ <input type="checkbox"/> 463 V
	Average value	U_{rm} 463 V
	Ratio between U_{rm} and U_e	U_{rm}/U_e 1,05
	Joule integral	Ph_1 894x10 ³ A ² s
		Ph_2 635x10 ³ A ² s
		Ph_3 1780x10 ³ A ² s
7.2.1.1.3	Closing operation time	ms
	Melting of the fusible element	Yes/No No
	Cracks observed	Yes/No No
	if Yes	Page - / -




Test laboratory: ACAE IA.01

[Signature]
Authorized representative

Date 04.02.10.

TRF IEC/EN 60947-2
Ed. 2.1 form 41



LOVAG		Test report No.: 03.044
Type test according to: IEC 60947-2 Test sequence II (Ics = Icu)		Page 14 / 44
Standard and clause		Test values Results
7.2.1.1.3	Time interval between operations	3 min
	OPERATION „CO“	
	Oscillogram	Page 39 / 44
	Applied voltage	462 V
	Peak current value	i_1 23,5 kA
		i_2 21,0 kA
		i_3 12,3 kA
	Maximum total duration	8,0 ms
	Recovery voltage (phase to phase or phase to neutral)	$U_{r(1-2)}$ <input checked="" type="checkbox"/> or $U_{r(1-N)}$ <input type="checkbox"/> $U_{r(2-3)}$ <input checked="" type="checkbox"/> or $U_{r(2-N)}$ <input type="checkbox"/> $U_{r(3-1)}$ <input checked="" type="checkbox"/> or $U_{r(3-N)}$ <input type="checkbox"/>
	Average value	U_{rm} 463 V
	Ratio between U_{rm} and U_e	U_{rm}/U_e 1,05
	Joule integral	Ph_1 1230x10 ³ A ² s Ph_2 1420x10 ³ A ² s Ph_3 390x10 ³ A ² s
	Closing operation time	- ms
	Melting of the fusible element	Yes/No No
	Cracks observed if Yes	Yes/No No Page - / -
Test laboratory: ACAE IA.01	Authorized representative 	TRF IEC/EN 60947-2 Ed. 2.1 form 42 
	Date 04.02.10	

Type test according to: IEC 60947-2


Type: T5N 400

Method for determination of short-circuit power factor

The method is based on a three-phase current calibration with the maximum asymmetry on one phase. This condition is obtained by the operation of the closing device when no-load voltage wave is passing through zero value. In order to guarantee the required precision the tolerance on the closing time is ± 0.2 ms of the passing time through the zero value of this voltage.

Power factor is checked on only one phase, in according with 8.3.2.2.4 of Test Instruction LOVAG LTI IEC 947-2 rev.3.

The measurement of the power factor is performed by a digital recorder associated with a computer. The amplitude A (first positive peak) and B (first negative peak) are measured and from the formula $k = [B/A]$ is deduced the power factor value showed in the annexed table.

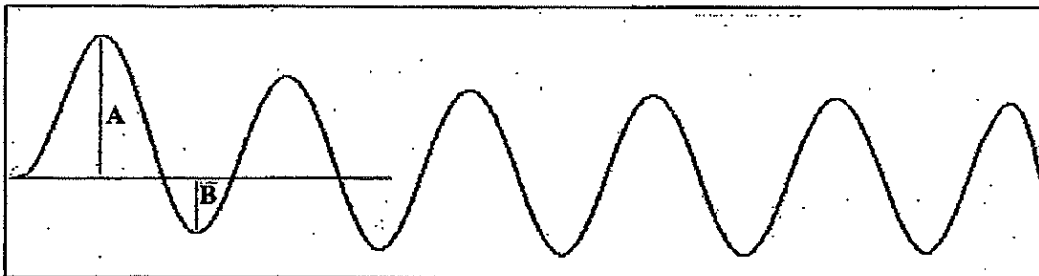

Power factor	k	Power factor	k	Power factor	k	Power factor	k	Power factor	k
0	0	0,12	0,313	0,24	0,529	0,36	0,682	0,48	0,794
0,01	0,031	0,13	0,334	0,25	0,544	0,37	0,693	0,49	0,801
0,02	0,061	0,14	0,355	0,26	0,558	0,38	0,707	0,5	0,809
0,03	0,09	0,15	0,375	0,27	0,572	0,39	0,713	0,51	0,817
0,04	0,118	0,16	0,394	0,28	0,586	0,4	0,723	0,52	0,824
0,05	0,145	0,17	0,413	0,29	0,599	0,41	0,733	0,53	0,831
0,06	0,172	0,18	0,431	0,3	0,612	0,42	0,742	0,54	0,838
0,07	0,197	0,19	0,448	0,31	0,624	0,43	0,751	0,55	0,845
0,08	0,222	0,2	0,465	0,32	0,636	0,44	0,76		
0,09	0,246	0,21	0,482	0,33	0,648	0,45	0,769		
0,1	0,269	0,22	0,498	0,34	0,66	0,46	0,777		
0,11	0,292	0,23	0,514	0,35	0,674	0,47	0,785		


Test laboratory: ACAE IA.01

Rop


Authorized representative

Date 04.02.10

TRF IEC/EN 60947-2
Ed. 2.1 form 170



CIRCUIT DIAGRAM TYPE A

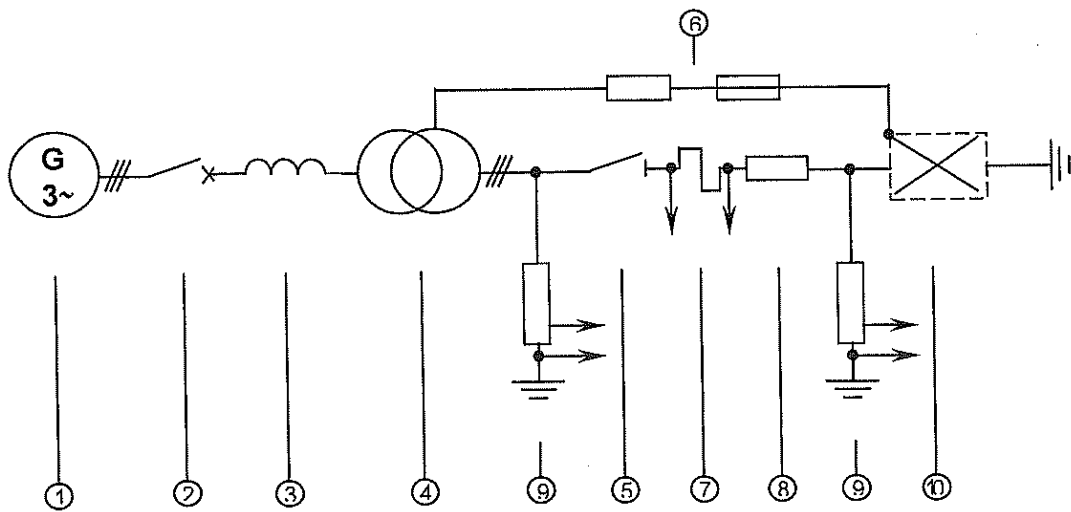

- 1 - Three-phase generator
- 2 - Back-up circuit breaker
- 3 - Air reactors
- 4 - Three-phase transformer
- 5 - Short-circuit making switch
- 6 - Device for the detection of fault current
- 7 - Non inductive shunts for current measurement
- 8 - Resistors
- 9 - Dividers for voltage measurement
- 10 - Apparatus under test


Test laboratory: ACAE IA.01

Rep


Authorized representative

Date 04.02.10

TRF IEC/EN 60947-2
Ed. 2.1 form 170



CIRCUIT DIAGRAM TYPE S

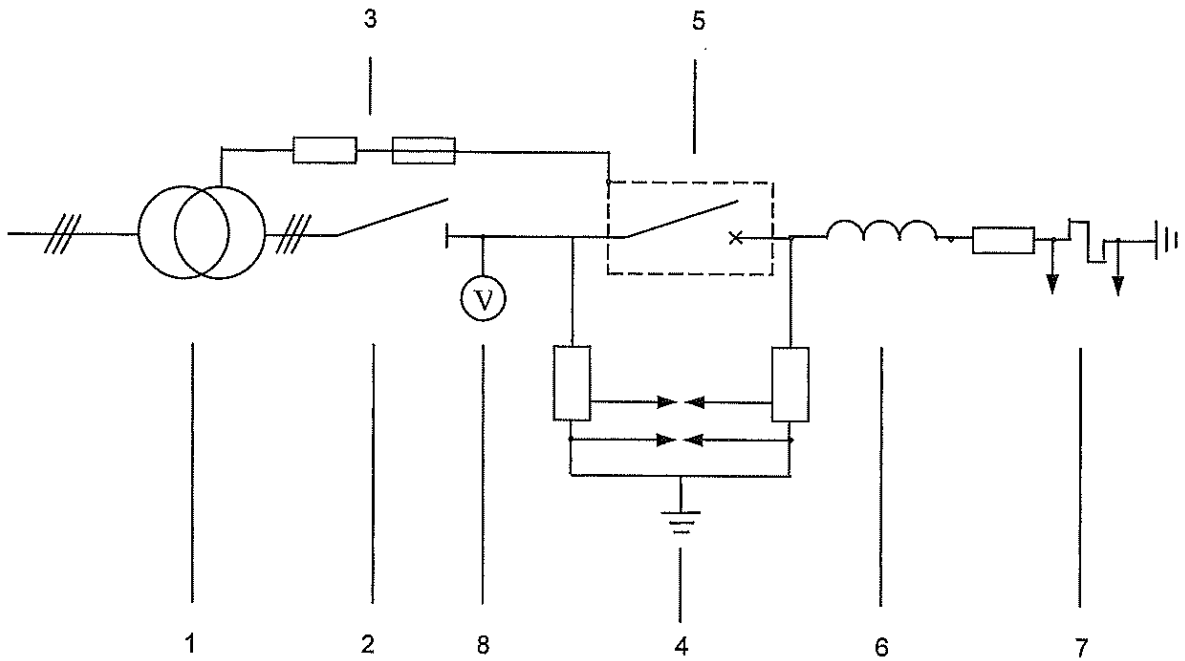

- 1 - Three-phase transformer
- 2 - Short-circuit making switch
- 3 - Device for the detection of fault currents
- 4 - Dividers for the arcing voltage measurement
- 5 - Apparatus under test
- 6 - Load (reactors and resistances)
- 7 - Non inductive shunts for current measurement
- 8 - Voltmeter for voltage measurement

Test laboratory: ACAE IA.01

Rgp
Authorized representative

Date 04.02.10


TRF IEC/EN 60947-2
Ed. 2.1 form 170

LOVAG

Test report No.: 03.084
Page 36 / 44

Type test according to: IEC 60947-2

Type: T5N 400

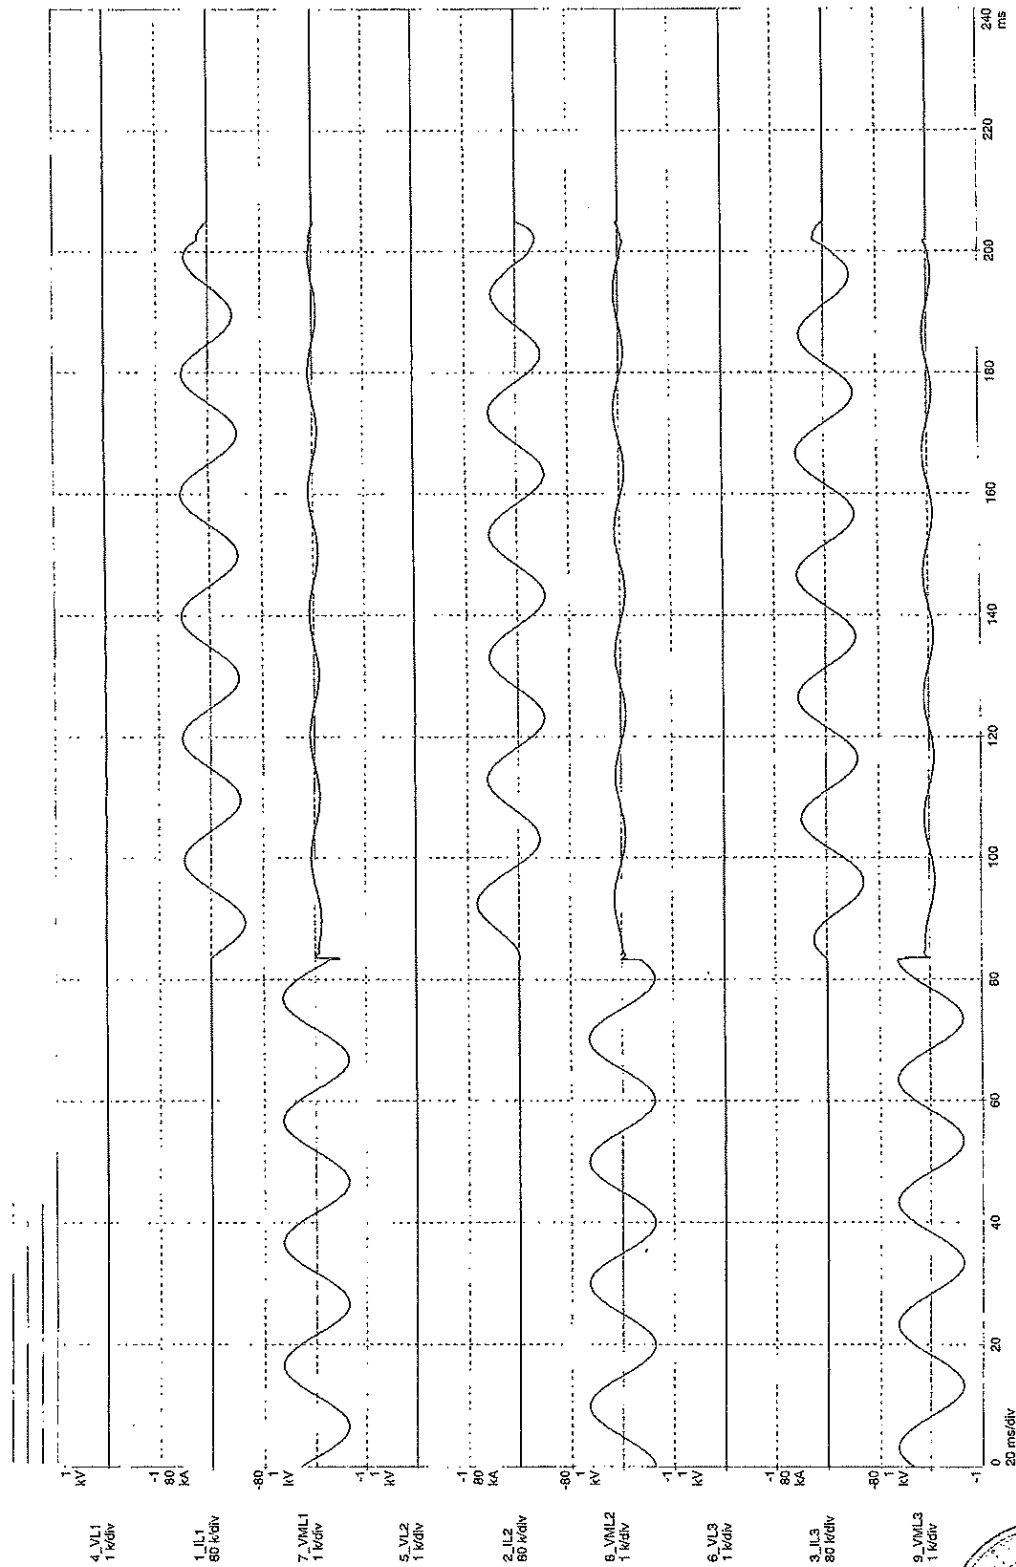

RESOCCONTO LBR51945
OSCILLOGRAMMA 00033130
ORA 09.50.16
DATA 09/12/2003

Test laboratory: ACAE IA.01

Rep

Authorized representative

TRF IEC/EN 60947-2
Ed. 2.1 form 170

Date 04.02.10

[Handwritten signature]

[Handwritten signature]

[Stamp]


[Handwritten signature]

LOVAG

Test report No.: 03.084
Page 37 / 44

Type test according to: IEC 60947-2

Type: T5N 400

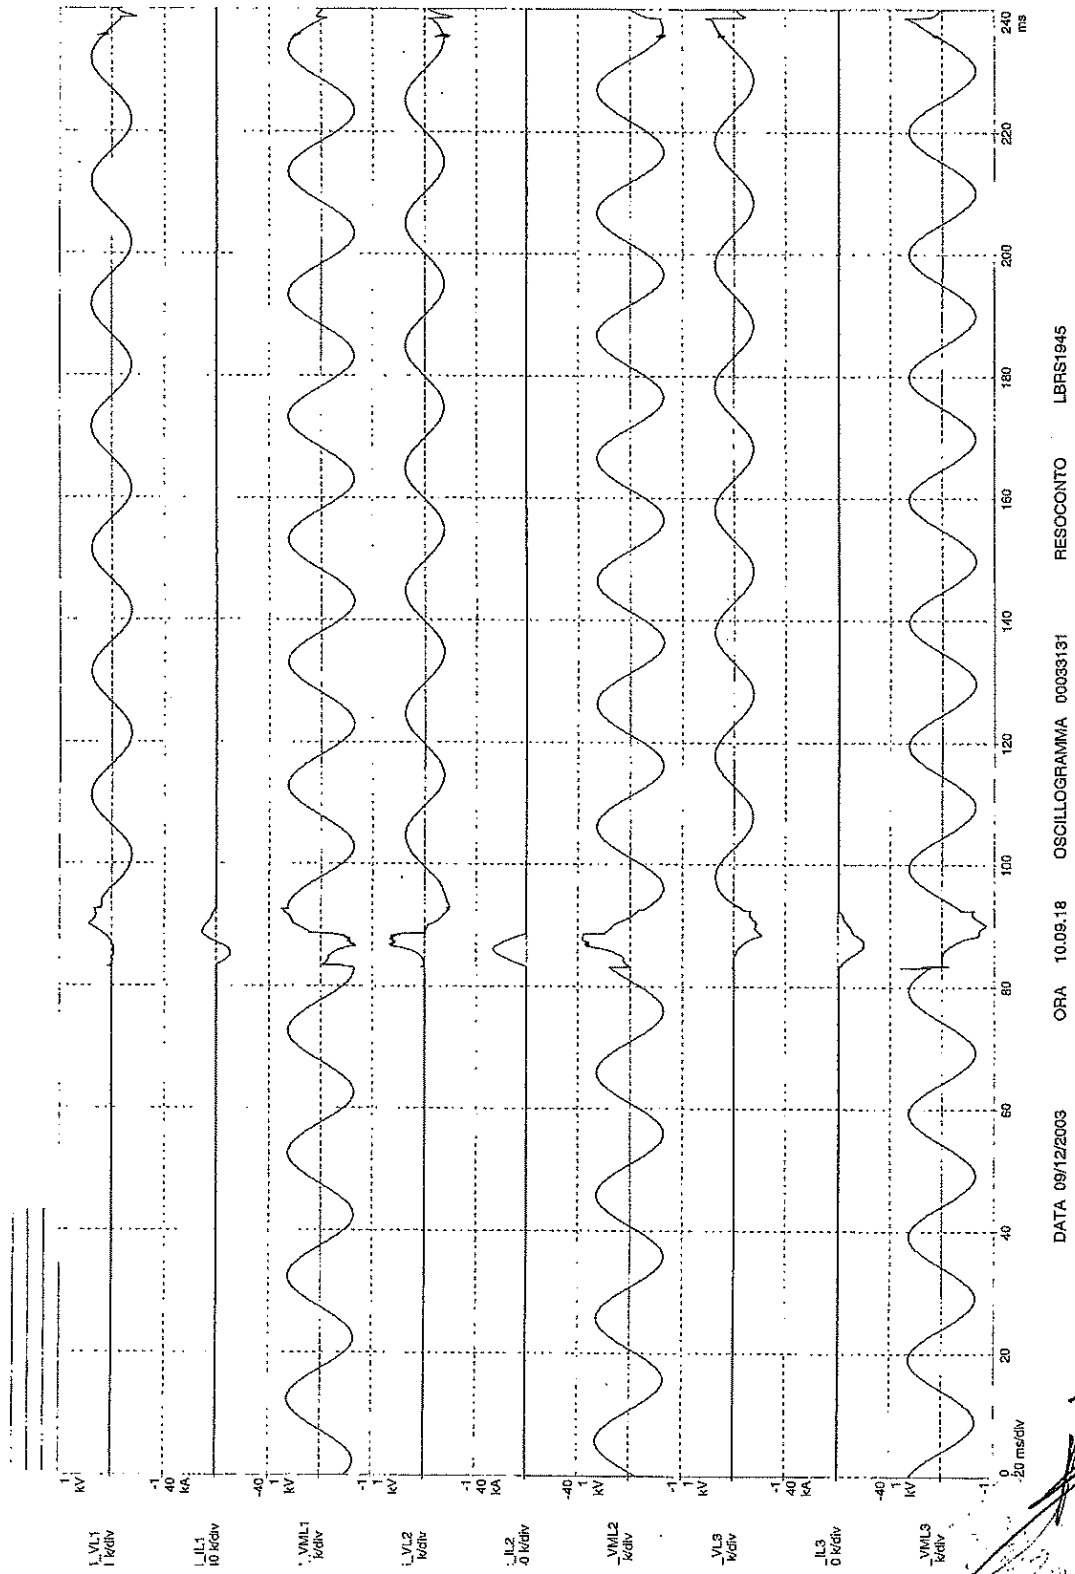


Test laboratory: ACAE IA.01

Rep
Authorized representative

TRF IEC/EN.60947-2

Ed. 2.1 form 170

Date 04.02.10.





LOVAG

Test report No.: 03.084

Page 43 / 44

Type test according to: IEC 60947-2

Type: T5N 400

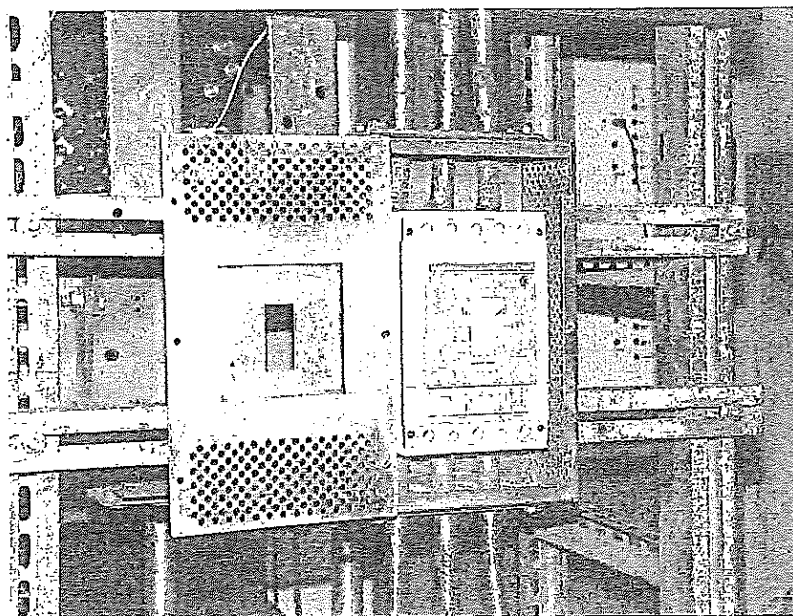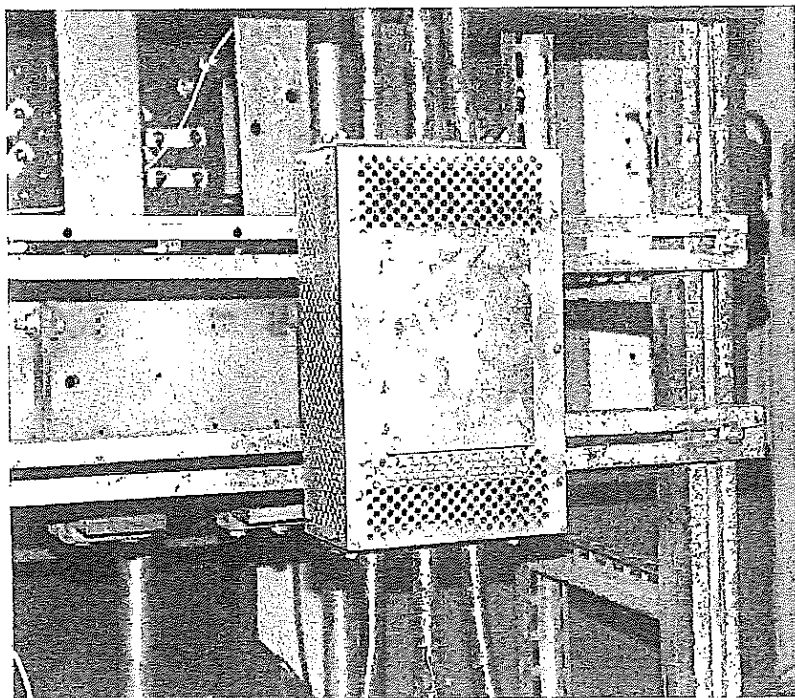

Test laboratory: ACAE IA.01

Rep

Authorized representative

TRF IEC/EN 60947-2
Ed. 2.1 form 170

Date 04.02.10

A handwritten signature and a circular stamp, likely a laboratory seal, located in the bottom right corner of the page.

A handwritten signature located at the bottom right corner of the page.

LOVAG	Test report No.: 03.084 Page 44 / 44
Type test according to: IEC 60947-2	Type: T5N 400

**COMPLETE LIST OF DRAWINGS AND DRAWINGS
CHECKED FOR THE COMPLIANCE OF THE PRODUCT**

TYPE OF DOCUMENT	N° DRAWING	Index of modification	Date
Assembly drawing*	1SDH000437R0.102	N0115	03-01-22
Instruction leaflet *	1SDH000437R0.001	L0815	03-07-21
Nameplate dwg *	Allegato I	-	03-03-20
Molded case or metal frame dwgs (all components)	RA1645 RA1646 RA1722 RA1813	L0707 L0707 L0823 L0832	03-01-24 03-01-24 03-09-02 03-09-22
Material list	RA1722.801 RA1813.801	L0707 L0707	03-01-24 03-01-24
Operating handle dwg	RA1675	L0808	03-06-30
Main and arcing fixed contacts assembly dwgs	RA1623 RA1631	L0823 L0808	03-09-02 03-06-30
Material list	RA1624.802 RA1631.802	L0808 L0808	03-06-30 03-06-30
Main and arcing moving contacts assembly dwgs	RA1612 RA1613	L0823 L0707	03-09-02 03-01-24
Material list	RA1612.802 RA1613.801	L0808 L0707	03-06-30 03-01-24
Main and arcing fixed contacts dwgs	RA1628	L0808	03-06-30
Main and arcing moving contacts dwgs	RA1616	L0707	03-01-24
Operating mechanism assembly dwgs	RA1659	L0707	03-01-24
Material list	RA1659.803	L0808	03-06-30
Operating mechanism springs dwg	RA1716	L0707	03-01-24
Main contact springs dwg	RA1651	L0707	03-01-24
Arc chute assembly dwg	RA1636	L0707	03-01-24
Material list	RA1636.802	L0707	03-01-24
Overcurrent release assembly dwg	RA1810	L0707	03-01-24
Material list	RA1810.830 RA1810.831	L0707 L0707	03-01-24 03-01-24
Tripping device assembly dwg	RA2333	L0687	02-12-11
Material list	RA2333.801	L0687	02-12-11
Electronic release components dwgs	RE0374 RE0522	L0351 L0456	01-04-19 01-10-01
Material list	RE0374-1 RE0538/810 RE0538/809	L0656 L0456 L0456	02-10-25 01-10-01 01-10-01
Main terminals dwg	159486	27875	94-10-07
Tripping characteristic *	ISDH000436R0.511	-	03-01-22
Screen for SC Tests	RG0840/050	-	02-10-18


Test laboratory: ACAE IA.01

Authorized representative

Date 04.02.10

TRF IEC/EN 60947-2

Ed. 2.1 form 170

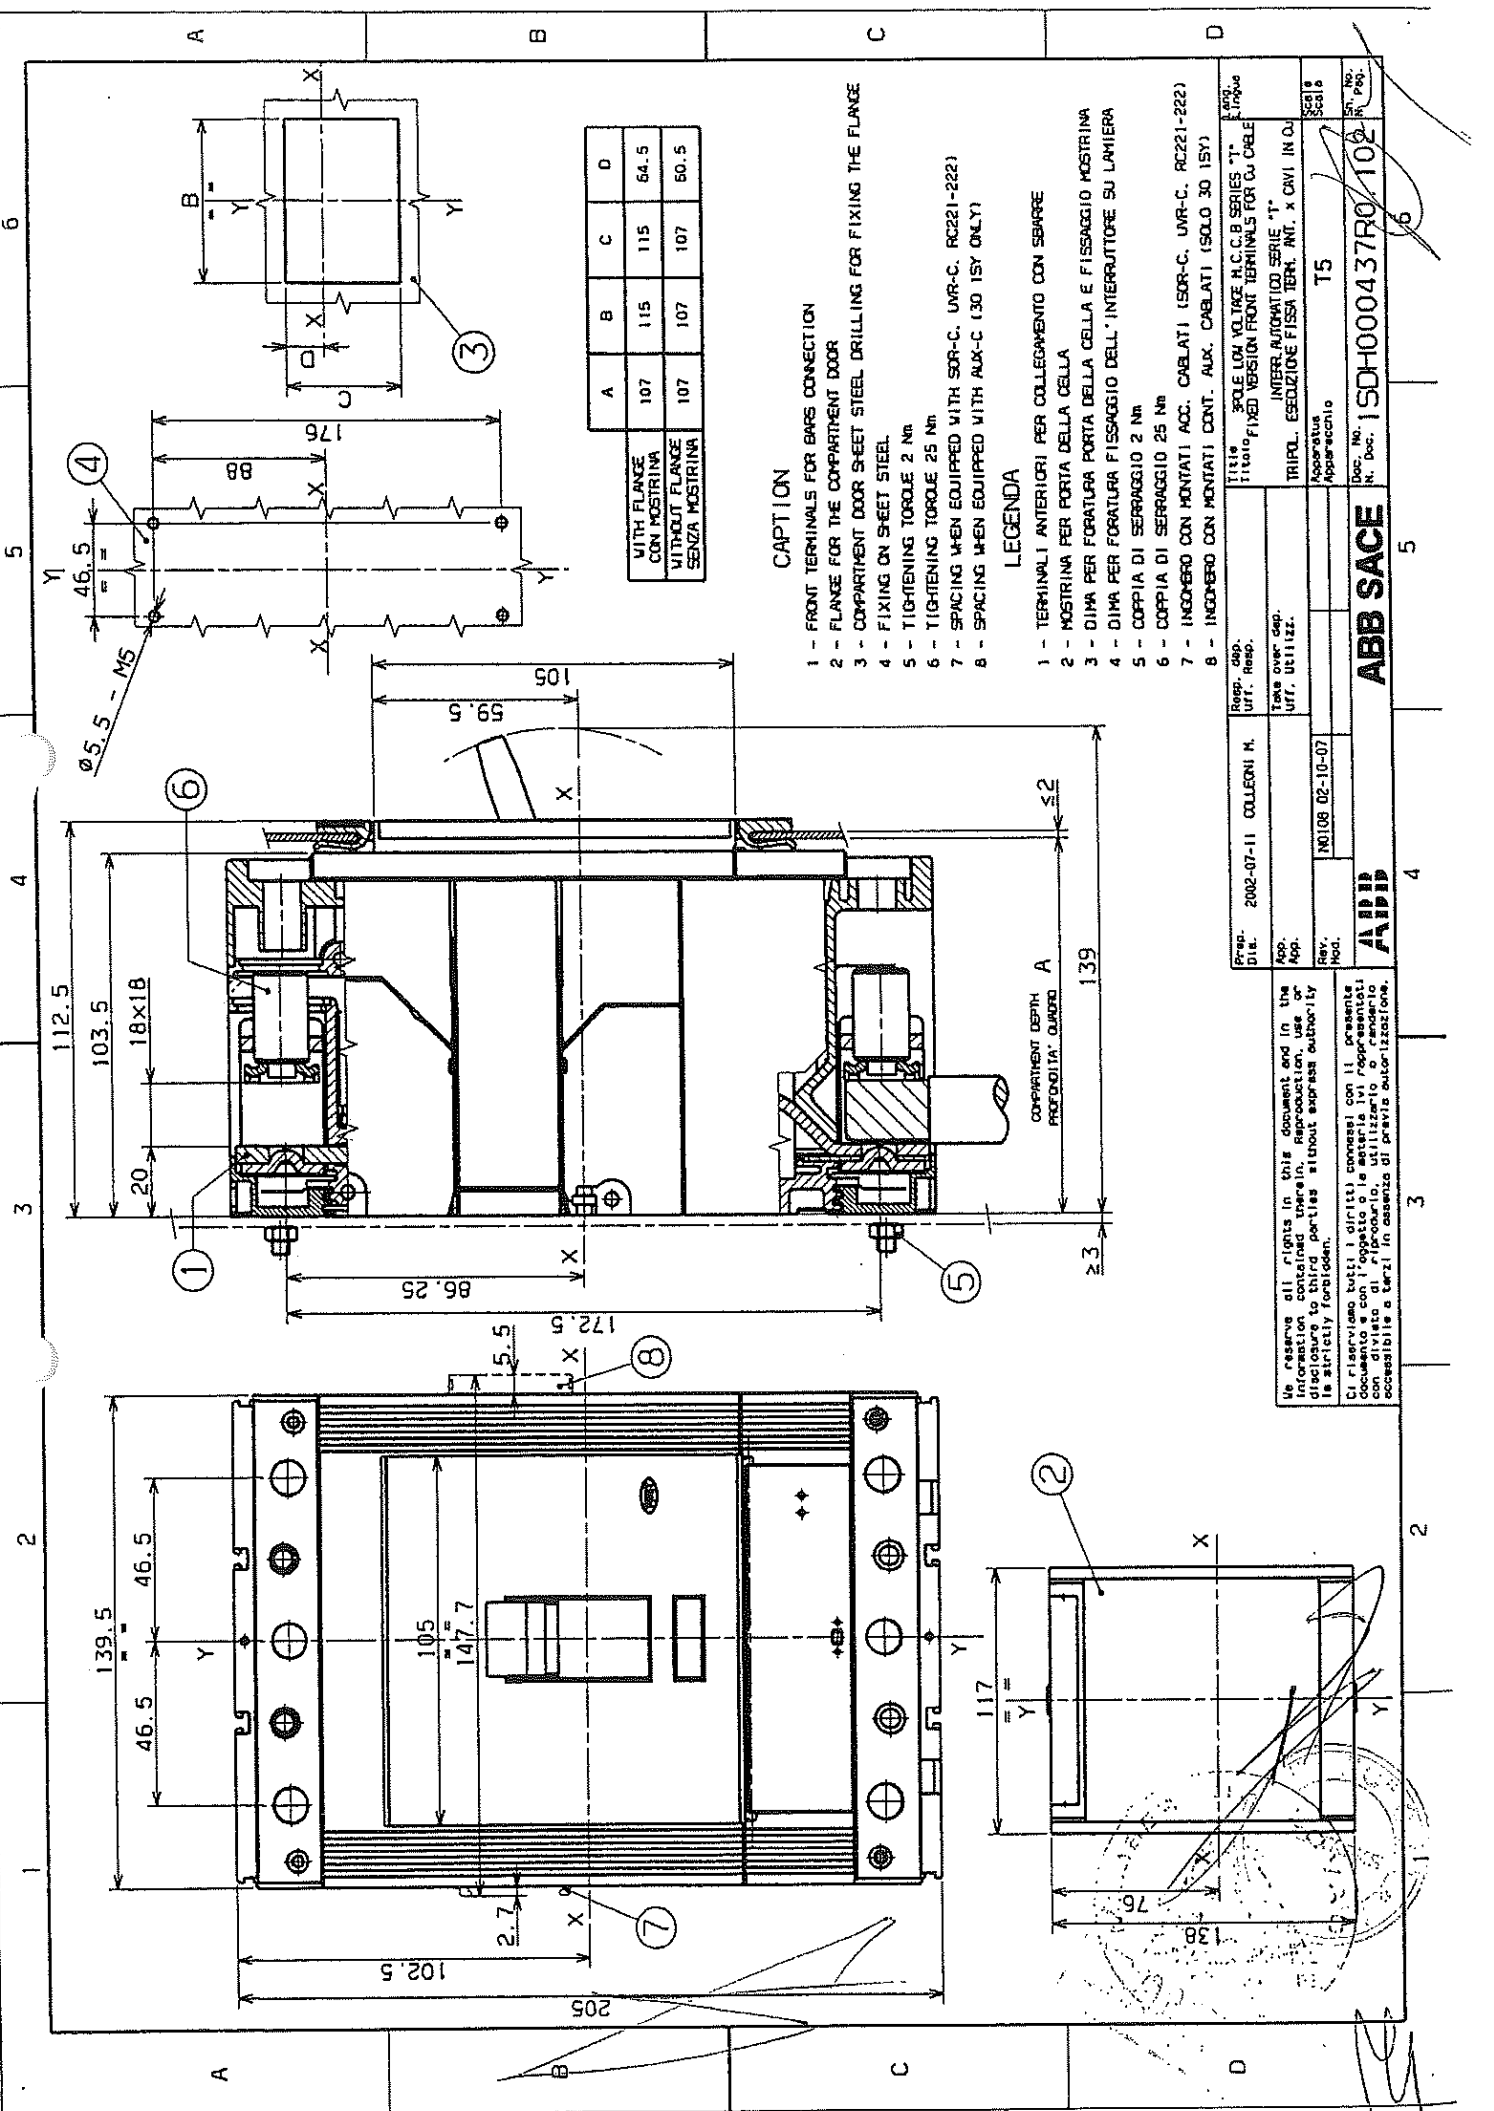

	A	B	C	D
WITH FLANGE CON MOSTRINA	107	115	115	64.5
WITHOUT FLANGE SENZA MOSTRINA	107	107	107	50.5

CAPTION

- 1 - FRONT TERMINALS FOR BARS CONNECTION
- 2 - FLANGE FOR THE COMPARTMENT DOOR
- 3 - COMPARTMENT DOOR SHEET STEEL DRILLING FOR FIXING THE FLANGE
- 4 - FIXING ON SHEET STEEL
- 5 - TIGHTENING TORQUE 2 Nm
- 6 - TIGHTENING TORQUE 25 Nm
- 7 - SPACING WHEN EQUIPPED WITH SOR-C, UVR-C, RC221-222)
- 8 - SPACING WHEN EQUIPPED WITH AUX-C (30 ISY ONLY)

LEGENDA

- 1 - TERMINALI ANTERIORI PER COLLEGAMENTO CON SBARRE
- 2 - MOSTRINA PER PORTA DELLA CELLA
- 3 - DIMA PER FORATURA PORTA DELLA CELLA E FISSAGGIO MOSTRINA
- 4 - DIMA PER FORATURA FISSAGGIO DELL' INTERRUITTORE SU LAMIERA
- 5 - COPPIA DI SERRAGGIO 2 Nm
- 6 - COPPIA DI SERRAGGIO 25 Nm
- 7 - INGOMBRO CON MONTATI ACC. CABLATI (SOR-C, UVR-C, RC221-222)
- 8 - INGOMBRO CON MONTATI CONT. AUX. CABLATI (SOLO 30 ISY)

Spec. Dis.	2002-07-11	COLLEZIONI N.	
Resp. sup.		uff.	Resp.
App.		Torna over dep.	
Mod.		uff.	UTILIZZ.
		NO.009 02-10-07	
		Apparecchio	T5
Title		SINGLE LINE VOLTAGE R.C.C.B SERIES "T"	
Title		FIXED VERSION FRONT TERMINALS FOR CU CABLE	
Title		INTERMEDIATOIO SERIE "T"	
Title		TRIPPL. ESECUZIONE FISSA TERM. INT. x ONI IN CU	
Title		Apparecchio	
Doc. No.		1SDH000437R0102	
N. Doc.		1SDH000437R0102	
N. Pagine		6	

We reserve all rights in this document and in the information contained therein. Reproduction, use or disclosure to third parties without express authority is strictly forbidden.

Ci riserviamo tutti i diritti concessi con il presente Documento con l'oggetto o le materie ivi rappresentati con divieto di riprodotto, utilizzo o rimpiego accessibile a terzi in assenza di previa autorizzazione.

ABB SACE

ABB



Lloyd's
Register

Type Approval Extension Certificate

This is to certify that Certificate No. 05/00013(E2) for the undernoted products is extended and renumbered as shown.

This certificate is issued to:

PRODUCER	ABB S.p.A. Via Pescaria, 5 24123 Bergamo Italy			
PLACE OF PRODUCTION	ABB S.p.A. Via Enrico Fermi 14 03100 Frosinone Italy			
DESCRIPTION	Low Voltage Moulded-Case Circuit Breakers			
TYPES	Tmax T4 N 250	Tmax T4 N 320	Tmax T5 N 400	Tmax T5 N 630
	Tmax T4 S 250	Tmax T4 S 320	Tmax T5 S 400	Tmax T5 S 630
	Tmax T4 H 250	Tmax T4 H 320	Tmax T5 H 400	Tmax T5 H 630
	Tmax T4 L 250	Tmax T4 L 320	Tmax T5 L 400	Tmax T5 L 630
	Tmax T4 V 250	Tmax T4 V 320	Tmax T5 V 400	Tmax T5 V 630
Equipped with:	microprocessor based over-current releases types: PR 221 DS PR 222 DS/PD PR 222 MPS PR 223 EF/DS			
	thermomagnetic based over-current releases types: TMD TMA MA TMG			
APPLICATION	Marine, offshore and industrial applications for use in environmental categories ENV1, ENV2 and ENV3 as detailed in LR Test Specification No.1:2013.			
SPECIFIED STANDARDS	IEC 60947-1:2007 + A1:2010 + A2:2014 IEC 60947-2:2006 + A1:2009 + A2:2013			

Certificate No.	05/00013(E3)
Issue Date	26 June 2015
Expiry Date	3 February 2020
Sheet	1 of 4

Luiqi Benedetti - Senior Specialist
на основание чл. 36а, ал. 3 от ЗОП

Lloyd's Register

Trieste Technical Support Office
Electrotechnical Systems

L. Benedetti
Trieste Technical Support Office
Lloyd's Register EMEA

Lloyd's Register EMEA
Southampton Boldrewood Innovation Campus, Burgess Road, Southampton SO16 7QF

Lloyd's Register EMEA
is a subsidiary of Lloyd's Register Group

Lloyd's Register Group Limited, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the "Lloyd's Register". Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



ADDITIONAL TESTS

Low Temperature, -25°C ±2°C for 16 hours

RATINGS

	Tmax T4	Tmax T5
Poles:	3 / 4	3 / 4
Size :	250 / 320 A	400 / 630 A
Rated Current In :	10 ÷ 320 A	320 ÷ 630 A
Rated Operational Voltage Ue :	690 V a.c.	690 V a.c.
Frequency :	50 - 60 Hz	50 - 60 Hz
Category (IEC 60947-2)	A	A (630A) ; B (400 A)

Rated Ultimate Short Circuit Breaking Capacity Icu [kA]

	N	S	H	L	V
@ 440 V a.c.	30	40	65	100	180
@690 V a.c.	20	25	40	70	80

Rated Service Short Circuit Breaking Capacity Ics [kA]

	N	S	H	L	V
@ 440 V a.c.	30	40	65	100	180
@690 V a.c.	20	25	40 (*)	70 (**)	80 (***)

for T5 630 : (*) 30 kA ; (**) 35 kA ; (***) 40 kA

Rated Short Circuit Making Capacity Im [kA]

	N	S	H	L	V
@ 440 V a.c.	63	84	143	220	396
@690 V a.c.	40	52.5	84	154	176

Power Factor

	N	S	H	L	V
@ 440 V a.c.	0.25	0.25	0.2	0.2	0.2
@690 V a.c.	0.25	0.25	0.25	0.2	0.2

Rated Short Time Withstand Current Icw [kA]

	N	S	H	L	V
T5 400	5	5	5	5	5

Certificate No. 05/00013(E3)
 Issue Date 26 June 2015
 Expiry Date 3 February 2020
 Sheet 2 of 4

Luigi Benedetti - Senior Specialist

на основание чл. 36а, ал. 3 от ЗОП

Lloyd's Register

Electrotechnical Systems

L. Benedetti

Lloyd's Register EMEA Technical Support Office

Lloyd's Register EMEA

Lloyd's Register EMEA
 Southampton Boldrewood Innovation Campus, Burgess Road, Southampton SO16 7QF

Lloyd's Register EMEA
 Is a subsidiary of Lloyd's Register Group

Lloyd's Register Group Limited, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



Lloyd's Register

Trip Units:
Thermomagnetic
Electronic

TMD - TMA - MA - TMG
PR221DS - PR222DS/PD -
PR222 MPS - PR 223 EF/DS

"This Certificate is not valid for equipment, the design, ratings or operating parameters of which have been varied from the specimen tested. The manufacturer should notify Lloyd's Register EMEA of any modification or changes to the equipment in order to obtain a valid certificate."

The Design Appraisal Document No.05/00013(E3) and its supplementary Type Approval Terms and Conditions form part of this Certificate.

All other details remain as the previous Certificate No. 05/00013, 05/00010(E1) and 05/00013(E2) to which this extension should be attached.

Certificate No. 05/00013(E3)
Issue Date 26 June 2015
Expiry Date 3 February 2020
Sheet 3 of 4

Luigi Benedetti - Senior Specialist 26 На основании чл. 36а, ал. 3 от ЗОП Trieste Technical Support Office Electrotechnical Systems	 Lloyd's Register
--	----------------------

L. Benedetti
Trieste Technical Support Office
Lloyd's Register EMEA
Lloyd's Register EMEA

Lloyd's Register EMEA
Southampton Boldrewood Innovation Campus, Burgess Road, Southampton SO16 7QF

Lloyd's Register EMEA
is a subsidiary of Lloyd's Register Group

Lloyd's Register Group Limited, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



Lloyd's Register

Certificate No.

05/00013(E3)

Issue Date

26 June 2015

Expiry Date

3 February 2021

Sheet

4 of 4


Luigi Benedetti - Senior Specialist		Lloyd's Register
26 June 2015		
на основании чл. 36а, ал. 3 от ЗОП		
L. Benedetti		
Trieste Technical Support Office		
Lloyd's Register EMEA		

Lloyd's Register EMEA

Southampton Boldrewood Innovation Campus, Burgess Road, Southampton SO16 7QF

Lloyd's Register EMEA
is a subsidiary of Lloyd's Register Group

Lloyd's Register Group Limited, its affiliates and subsidiaries and their respective officers, employees or agents are, individually and collectively, referred to in this clause as the 'Lloyd's Register'. Lloyd's Register assumes no responsibility and shall not be liable to any person for any loss, damage or expense caused by reliance on the information or advice in this document or howsoever provided, unless that person has signed a contract with the relevant Lloyd's Register entity for the provision of this information or advice and in that case any responsibility or liability is exclusively on the terms and conditions set out in that contract.



Handwritten signature

**TYPE APPROVAL CERTIFICATE
N. ELE200211CS/001**

This is to certify that the product below is found to be in compliance with the applicable requirements of the RINA type approval system.

<i>Description</i>	Circuit breaker
<i>Type</i>	Tmax T5S / H / L / V / N 400 T5S / H / L / V / N 630
<i>Applicant</i>	ABB SACE SpA Via Baioni, 35 24123 Bergamo ITALY
<i>Manufacturer</i>	ABB SACE SpA Via Enrico Fermi, 14 03100 Frosinone ITALY
<i>Testing Standards</i>	IEC 60947-2

Issued in Genova on June 10, 2011.

This certificate is valid until June 10, 2016

на основание чл. 36а, ал. 3 от ЗОП

RINA

Valerio Bonanni

Genova, June 10, 2011


Handwritten signature

RINA S.p.A.
Via Corsica, 12 - 16128 Genova
Tel. +39 010 53851
Fax +39 010 5351000

Handwritten signature
1/4
Handwritten initials



TYPE APPROVAL CERTIFICATE
N. ELE200211CS/001



• **Circuit breakers type T5S 400 and T5S 630.**

Circuit breaker type	Units	T5S400	T5S400	T5S630	T5S630
Relay type		See remarks			
Rated voltage (Ue)	V	440	690	440	690
Rated Current (Iu)	A	400	400	630	630
Ambient Temperature	°C	40	40	40	40
Rated Frequency	Hz	50-60	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	40	25	40	25
Ultimate short-circuit breaking capacity (Icu)	kA	40	25	40	25
Short-circuit making capacity (Icm)	kA	84	52.5	84	52.5
Power factor		0.25	0.25	0.25	0.25
Utilization Category		B	B	A	A

• **Circuit breakers type T5H 400 and T5H 630.**


Circuit breaker type	Units	T5H400	T5H400	T5H630	T5H630
Relay type		See remarks			
Rated voltage (Ue)	V	440	690	440	690
Rated Current (Iu)	A	400	400	630	630
Ambient Temperature	°C	45	45	40	45
Rated Frequency	Hz	50-60	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	65	40	65	30
Ultimate short-circuit breaking capacity (Icu)	kA	65	40	65	40
Short-circuit making capacity (Icm)	kA	143	84	143	84
Power factor		0.2	0.25	0.2	0.25
Utilization Category		B	B	A	A

• **Circuit breakers type T5L 400 and T5L 630.**

Circuit breaker type	Units	T5L400	T5L400	T5L630	T5L630
Relay type		See remarks			
Rated voltage (Ue)	V	440	690	440	690
Rated Current (Iu)	A	400	400	630	630
Ambient Temperature	°C	45	40	45	45
Rated Frequency	Hz	50-60	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	100	70	100	35
Ultimate short-circuit breaking capacity (Icu)	kA	100	70	100	70
Short-circuit making capacity (Icm)	kA	220	154	220	154
Power factor		0.2	0.2	0.2	0.2
Utilization Category		B	B	A	A

Genova, June 10, 2011

RINA S.p.A.
Via Corsica, 12 - 16128 Genova
Tel. +39 010 53851
Fax +39 010 535 1000





[Handwritten signature]

TYPE APPROVAL CERTIFICATE N. ELE200211CS/001

• **Circuit breakers type T5V 400 and T5V 630**

Circuit breaker type	Units	T5V400	T5V400	T5V630	T5V630
Relay type		See remarks			
Rated voltage (Ue)	V	440	690	440	690
Rated Current (Iu)	A	400	400	630	630
Ambient Temperature	°C	45	40	40	45
Rated Frequency	Hz	50-60	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	180	80	180	40
Ultimate short-circuit breaking capacity (Icu)	kA	180	80	180	80
Short-circuit making capacity (Icm)	kA	396	176	396	176
Power factor		0.2	0.2	0.2	0.2
Utilization Category		B	B	A	A

• **Circuit breaker type T5N 400**

Circuit breaker type	Units	T5N 400		
Relay type		See remarks		
Rated voltage (Ue)	V	415	440	690
Rated Current (Iu)	A	400	400	400
Ambient Temperature	°C	45	45	45
Rated Frequency	Hz	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	36	30	20
Ultimate short-circuit breaking capacity (Icu)	kA	36	30	20
Short-circuit making capacity (Icm)	kA	75.6	63	40
Power factor		0.25	0.25	0.3
Utilization Category		B	B	B

• **Circuit breaker type T5N 630**

Circuit breaker type	Units	T5N 630		
Relay type		See remarks		
Rated voltage (Ue)	V	415	440	690
Rated Current (Iu)	A	620	620	620
Ambient Temperature	°C	45	45	45
Rated Frequency	Hz	50-60	50-60	50-60
Service short-circuit breaking capacity (Ics)	kA	36	30	20
Ultimate short-circuit breaking capacity (Icu)	kA	36	30	20
Short-circuit making capacity (Icm)	kA	75.6	63	40
Power factor		0.25	0.25	0.3
Utilization Category		A	A	A

Genova, June 10, 2011

[Handwritten signature]

RINA S.p.A.
Via Corsica, 12 - 16128 Genova
Tel. +39 010 53851
Fax +39 010 5351000


[Handwritten signature]
[Handwritten signature]

3/4

[Circular stamp]



**TYPE APPROVAL CERTIFICATE
N. ELE200211CS/001**



Remarks

All the circuit breakers can be equipped with:
Thermomagnetic release:
T5. 400 (from R320 to R400) and T5. 630 (from R320 to R630);
Electronic release:
- PR221DS, PR222DS, PR223DF/EF:
T5. 400 (from R320 to R400) and T5. 630 (from R320 to R630);
- PR222MP, PR223DF/EF:
T5.400 (from R320 to R400).

Test reports / Certificates

T5S:

IT 04.014 issued on 24.02.2004
IT 04.012 issued on 24.02.2004
IT 04.120 issued on 05.09.2003
IT 04.013 issued on 24.02.2004
IT 04.019 issued on 04.03.2004

T5H:

IT 03.118 issued on 05.09.2003
IT 03.135 issued on 13.10.2003
IT 03.121 issued on 05.09.2003
IT 03.136 issued on 13.10.2003
IT 03.137 issued on 13.10.2003

T5L:

IT 03.119 issued on 05.09.2003
IT 03.150 issued on 21.10.2003
IT 03.122 issued on 05.09.2003
IT 03.138 issued on 13.10.2003
IT 03.139 issued on 13.10.2003

T5V:

IT 03.151 issued on 21.10.2003
IT 03.124 issued on 05.09.2003
IT 03.134 issued on 13.10.2003
IT 03.140 issued on 21.10.2003
IT 04.027 issued on 10.05.2004
IT 03.123 issued on 05.09.2003


T5N

IT 04.017 issued on 10.02.2004
IT 04.018 issued on 24.02.2004

Test reports for ELECTRONIC RELEASE PR223DS/EF
ABB SACE LBRP 6702/00, ABB PT n° 21369, ABB PT n° 21364 ,IMQ n° 80SE00622/1,
IMQ n° 80SE00622/2.

Genova, June 10, 2011

RINA S.p.A.
Via Corsica, 12 - 16128 Genova
Tel. +39 010 53851
Fax +39 010 5351000





ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПАКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОПАРАТУРА-НИ И СРЪИ

гр.Петрич 2880, Промислена зона
ул. "Свобода" 49
тел.: 00359 745 60743; факс: 00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул. "Райковд Вакарини" бл.5
тел.: 00359 2 869 0696; факс: 00359 2 958 9334
e-mail: sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.17.5


Сертификат/акредитация на независимата изпитвателна лаборатория, провела типовите изпитвания по т. 4 – заверено копие

*Настоящото приложение се прилага във връзка с участието ми в:
търс с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД



ASI-ACC-048

Certificate of Accreditation

certification against voluntary sustainability standards

ASI - Accreditation Services International GmbH hereby affirms that

Rina Services S.p.A.

Via Corsica, 12
Genova 16128 Italy

meets the ASI accreditation program requirements and those set forth in the accreditation standards listed in the annex to this certificate, for the following programs:

- Forest Stewardship Council® (FSC®)
- Marine Stewardship Council (MSC)


Accreditation Code ASI-ACC-048




Digitally signed by
GUNTARS LAGUNS
Date: 10/08/2017

ASI Managing Director

Please see the scope and validity of accreditation in the certificate annex on the ASI website: www.accreditation-services.com


ASI - Accreditation Services International GmbH
Friedrich-Ebert-Allee 69
53113 Bonn, Germany

This certificate is the property of ASI and must be immediately returned on request. Reproduction is prohibited except with written approval of ASI.
ASI Accreditation Services International GmbH © 2007





ASI Certificate of Accreditation - Annex

CAB Name Rina Services S.p.A.
CAB Shortcode RINA
Accreditation Code ASI-ACC-048
Accredited Activities Certification against voluntary sustainability standards - as indicated below
Last updated on 02 October 2017

Forest Stewardship Council® (FSC®) Accreditation

Date of original accreditation	24 September 2012
Current accreditation granted on	29 September 2017
Current accreditation valid until	24 September 2022
Technical Scope(s)	FSC COC
Geographical Scope(s)	Worldwide (excluding China).
Standard(s) to which CAB is accredited:	FSC-STD-20-001 v4-0 FSC-STD-20-011 V2-0 FSC-STD-40-003 V2-1
Standard(s) which CAB can certify against:	FSC-STD-40-004 V3-0 FSC-STD-40-005 V2-1 FSC-STD-40-006 V1-0 FSC-STD-40-007 V2-0

Rina Services S.p.A.
Accreditation Code ASI-ACC-048

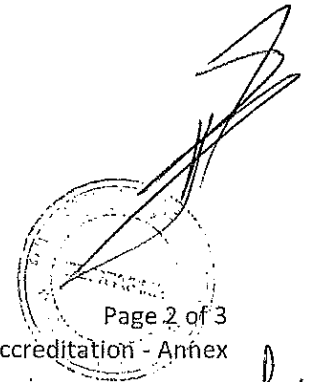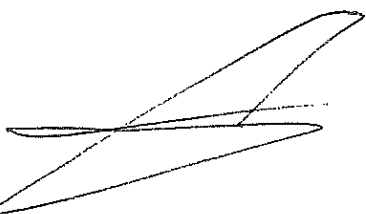

Marine Stewardship Council (MSC) Accreditation

Date of original accreditation	26 September 2013
Current accreditation granted on	26 September 2013
Current accreditation valid until	25 September 2018
Technical Scope(s)	MSC COC
Geographical Scope(s)	Worldwide
Standard(s) to which CAB is accredited:	MSC General Certification Requirements v2.1 MSC Chain of Custody Certification Requirements v2.0 MSC Chain of Custody Standard – Default v4.0
Standard(s) which CAB can certify against:	MSC Chain of Custody Standard – Group v1.0 MSC Chain of Custody Standard – Consumer-Facing Organisation v1.0

Rina Services S.p.A.
Accreditation Code ASI-ACC-048

Page 3 of 3
ASI Certificate of Accreditation - Annex



гр.Потржч 2850, Промислова зона
ул."Свобода"49
тел.:00359 745 60743; факс:00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул."Рикардо Вакрлин"бл.5
тел.:00359 2 869 0696; факс:00359 2 959 9334
e-mail:sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026856

ПРИЛОЖЕНИЕ 9.17.6

Инструкции за транспортиране, складиране, монтиране, вкл. въртящия момент на затягане и клемовите съединения, обслужване и поддържане

Автоматичните прекъсвачи НН с лят корпус трябва да се транспортират опаковани в оригинална опаковка.

Автоматичните прекъсвачи НН с лят корпус трябва да се съхраняват в сухи, закрити помещения опаковани в оригинална опаковка

Автоматичните прекъсвачи НН с лят корпус да бъдат монтирани на монтажна проща, сила на затягане 2,5 Nm.

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

Наименование на материала: Триполюсни автоматични прекъсвачи НН с лят корпус, от 100 А до 400 А, с термомагнитна защита, категория А

Съкратено наименование на материала: Трип. авт. прек. НН, с ТМ защита, 100-400 А, кат. А

Област: Н – Електрически уредби СрН/НН

Категория: 17– Комутационни апарати НН за защита

Мерна единица: Брой

Аварийни запаси: Да

Характеристика на материала:

Триполюсните автоматични прекъсвачи НН с лят корпус представляват механични комутационни апарати от фиксиран тип с предно свързване на шинната система. Автоматичните прекъсвачи са способни да провеждат и да включват/изключват ръчно електрически токове във вериги при нормални условия и да включват, да провеждат за определено време и да изключват автоматично посредством електромеханична защита от термомагнитен тип токове във вериги при условията на претоварване и късо съединение.

Тялото (корпусът) на автоматичните прекъсвачи НН е изработено чрез формоване на устойчив на нагряване, на огън и на механични удари изолационен материал. Използваните в конструкцията изолационни материали съответстват на изискванията на т. 7.1. от БДС EN 60947-2 или еквивалентно/и. Управлението се осъществява ръчно посредством лост. Включването/изключването на контактите на трите полюса се осъществява едновременно с висока скорост, която не зависи от действията на оператора. Автоматичният прекъсвач изпълнява разединяваща функция, която е обозначена със съответния символ. На челния панел на прекъсвача е разположен тест-бутон за проверка на изключвателния механизъм. Лостът за управление при вертикално монтиране на автоматичните прекъсвачи се движи в направление „нагоре – надолу“, при което контактите се затварят при движение „нагоре“. Лостът има три ясно индицирани положения, съответстващи на позицията на контактната система: „Включено“, „Изключено“ и „Автоматично изключено от свръхтокове /Тест“. Конструкцията осигурява защита срещу проникване на твърди тела и вода до степен най-малко IP20 за клемните съединения и IP40 за челната повърхност на прекъсвача, съгласно БДС EN 60529+A1 или еквивалентно/и.

Стойностите на прегряването на частите на триполюсните автоматични прекъсвачи НН с лят корпус при нормален работен режим при температура до 40°C не трябва да надвишават посочените в таблица 7 от БДС EN 60947-2 стойности или еквивалентно/и. Прекъсвачите са маркирани с информацията съгласно т. 5.2 от БДС EN 60947-2 или еквивалентно/и и СЕ маркировка за съответствие.

Прекъсвачите се доставят с предпазни клемови капаци, изолиращи фазови сепаратори и разширители и удължители на входа и на изхода, които са подходящи за свързване към шинна система, която е изработена с алуминиеви шини с правоъгълно сечение.

Триполюсните автоматични прекъсвачи са пакетирани в картонени кутии, на които е залепен етикет с наименование на материала „Автоматичен прекъсвач“, техническите данни, годината на производство, партидните номера и стандарта, в съответствие с който са произведени и изпитани - БДС EN 60947-2 или еквивалентно/и.

Използване:

Триполюсните автоматични прекъсвачи НН с лят корпус се монтират в разпределителни табла в трансформаторните постове и се използват за защита на електропроводните линии.

Съответствие на предлаганото изпълнение с нормативно-техническите документи:

Триполюсните автоматични прекъсвачи НН с лят корпус трябва да отговарят на посочените по-долу стандарт, или еквивалентно/и, включително на техните валидни изменения и допълнения:

- БДС EN 60947-1:2007 “Комутационни апарати за ниско напрежение. Част 1: Общи правила (IEC 60947-1:2007)” или еквивалентно/и;
- БДС EN 60947-2:2006 „Комутационни апарати за ниско напрежение. Част 2: Автоматични прекъсвачи (IEC 60947-2:2006)” или еквивалентно/и; и
- БДС EN 60529+A1:2004 Степени на защита, осигурени от обвивката (IP код) (IEC 60529:1989+A1:1999) или еквивалентно/и; и

да бъдат оценени положително по реда и при условията на Наредбата за съществените изисквания и оценяване на съответствието на електрически съоръжения, предназначени за използване в определени граници на напрежението..

Изисквания към документацията и изпитванията:

№ по ред	Документ	Приложение № (или текст)
1	Точно означение на типа, производителя и страната на производство (произход) и последно издание на каталога на производителя	ХТ1С160 R100А ХТ3N250 R250А ABB, Italy, Приложение 9.18.1
2	Техническо описание и чертежи с нанесени на тях размери	Приложение 9.18.2
3	ЕО декларация за съответствие	Приложение 9.18.3
4	Протоколи от типови изпитвания на английски или български език, проведени от независима изпитвателна лаборатория – заверени копия, с приложен списък на отделните изпитвания на български език	Приложение 9.18.4
5	Сертификат/акредитация на независимата изпитвателна лаборатория, провела типовите изпитвания по т. 4 – заверено копие	Приложение 9.18.5
6	Инструкции за транспортиране, складиране, монтиране, вкл. въртящия момент на затягане на клемовите съединения, обслужване и поддържане	Приложение 9.18.6

Забележка: Всички оригинални документи трябва да бъдат на български език или с превод на български език. (Каталозите и протоколите от проверките и изпитванията могат да бъдат и само на английски.)

Технически данни

1. Характеристики на работната среда

№ по ред	Характеристика	Стойност
1.1	Място на монтиране	На закрито
1.2	Максимална околна температура	+ 40°C
1.3	Минимална околна температура	Минус 5°C
1.4	Максимална средна околна температура за период от 24 ч.	+ 35°C
1.5	Относителна влажност (при 20°C)	До 90 %
1.6	Степен на замърсяване	3
1.7	Надморска височина	До 2000 m

2. Параметри на електроразпределителната мрежа

№ по ред	Параметър	Стойност
2.1	Номинално напрежение	400 / 230 V
2.2	Максимално напрежение	440 / 253 V
2.3	Номинална честота	50 Hz
2.4	Брой проводници в разпределителната мрежа	4 проводна мрежа (L ₁ , L ₂ , L ₃ , PEN)
2.5	Схема на разпределителната мрежа	TN-C

3. Общи технически параметри и други данни

№ по ред	Технически параметър	Изискване	Гарантирано предложение
3.1	Брой на полюсите	3	3
3.2	Обявено работно напрежение (U _a)	min 690 V AC	690 V AC
3.3	Обявена честота	50 Hz	50 Hz
3.4	Обявено импулсно напрежение (U _{imp})	min 6 kV	8 kV

№ по ред	Технически параметър	Изискване	Гарантирано предложение
3.5	Обявено изолационно напрежение (U _i)	min 690 V	800 V
3.6	Категория на приложение	A	A
3.7	Работна изключвателна възможност при късо съединение (I _{cs})	min 50% от I _{cu}	50% от I _{cu} 75% от I _{cu}
3.8	Защита от свръхтокове	-	-
3.8.1	Тип на защитата	Защитата от свръхтокове трябва да бъде от термомагнитен тип. (Допускат се изпълнения със защита от електронен тип.)	ДА, Защитата от свръхтокове е от термомагнитен тип.
3.8.2	Защита от претоварване	а) Диапазон на настройване на тока на изключване I _R =(min 0,8+1)xI _n	I _R =(0,7+1)xI _n
		б) Условен ток на неизключване I _{nd} =1,05xI _R във времеви интервал от 120 минути	I _{nd} =1,05xI _R
		в) Условен ток на изключване I _d = 1,30xI _R във времеви интервал до 120 минути	I _d = 1,30xI _R
3.8.3	Защита от къси съединения	Токът на изключване I _f трябва да бъде фиксиран на една от стойностите или регулируем в диапазона препоръчително от min 4x I _n до 10x I _n	Токът на изключване е фиксиран 10xI _n
3.9	Степен на защита от проникване на твърди тела и вода съгласно БДС EN 60529 или еквивалентно/и	-	-
3.9.1	Клемни съединения	IP 20	IP 20
3.9.2	Челна повърхност	IP 40	IP 40
3.10	Акcesoари	а) Два комплекта разширители и удължител за свързване към шинна система от алуминиева шина с правоъгълно сечение	ДА
		б) Два комплекта предпазни клемови капази и изолиращи фазови сепаратори.	ДА

4. Триполюсни автоматични прекъсвачи НН с лят корпус, 100 А ÷ 400 А, с термомагнитна защита, категория А

4.1 Триполюсен автоматичен прекъсвач НН с лят корпус, 100 А, с термомагнитна защита, кат. А

Номер на стандарта		Тип/референтен номер съгласно каталога на производителя	
20 17 5001		Да се посочи	
Наименование на материала		Триполюсен автоматичен прекъсвач НН с лят корпус, 100 А, с термомагнитна защита, кат. А	
Съкратено наименование на материала		Трип. авт. прек. НН, с ТМ защита, 100 А, кат. А	
№ по ред	Технически параметър	Изискване	Гарантирано предложение
4.1.1	Обявен ток (I _n)	100 А	100 А
4.1.2	Обявена максимална изключвателна възможност при к.с. (I _{cu})	min 12 kA / 500 V	18 kA / 500 V
4.1.3	Работна изключвателна възможност при късо съединение (I _{cs})	Съгласно т. 3.7 и т. 4.1.2 Да се посочи	50% от I _{cu}

Номер на стандарта		Тип/референтен номер съгласно каталога на производителя	
20 17 5001		Да се посочи	
Наименование на материала		Триполюсен автоматичен прекъсвач НН с лят корпус, 100 А, с термомагнитна защита, кат. А	
Съкратено наименование на материала		Трип. авт. прек. НН, с ТМ защита, 100 А, кат. А	
№ по ред	Технически параметър	Изискване	Гарантирано предложение
4.1.4	Ток на изключване на защитата от къси съединения (I_i)	Съгласно т. 3.8.3 Да се посочи	Токът на изключване е фиксиран $10xI_n$
4.1.5	Време за изключване при I_{cu}	max 0,010 s	0,010 s
4.1.6	Износоустойчивост	-	-
4.1.6a	Електрическа (брой к.ц.)	min 1500 бр.	8 000 бр.
4.1.6b	Механична (брой к.ц.)	min 8500 бр.	25 000 бр.
4.1.7	Максимални размери ВхШхД (Дълбочината „Д“ не включва лоста за управление)	165x110x125 mm	130x76,2x70 mm
4.1.8	Тегло, kg	Да се посочи	1,1 kg

4.3 Триполюсен автоматичен прекъсвач НН с лят корпус, 250 А, с термомагнитна защита, кат. А

Номер на стандарта		Тип/референтен номер съгласно каталога на производителя	
20 17 5003		Да се посочи	
Наименование на материала		Триполюсен автоматичен прекъсвач НН с лят корпус, 250 А, с термомагнитна защита, кат. А	
Съкратено наименование на материала		Трип. авт. прек. НН, с ТМ защита, 250 А, кат. А	
№ по ред	Технически параметър	Изискване	Гарантирано предложение
4.3.1	Обявен ток (I_n)	250 А	250 А
4.3.2	Обявена максимална изключвателна възможност при к.с. (I_{cu})	min 16 kA / 500 V	20 kA / 500 V
4.3.3	Работна изключвателна възможност при късо съединение (I_{cs})	Съгласно т. 3.7 и т. 4.3.2 Да се посочи	75% от I_{cu}
4.3.4	Ток на изключване на защитата от къси съединения (I_i)	Съгласно т. 3.8.3 Да се посочи	Токът на изключване е фиксиран $10xI_n$
4.3.5	Време за изключване при I_{cu}	max 0,010 s	0,010 s
4.3.6	Износоустойчивост	-	-
4.3.6a	Електрическа (брой к.ц.)	min 1000 бр.	8 000 бр.
4.3.6b	Механична (брой к.ц.)	min 7000 бр.	25 000 бр.
4.3.7	Максимални размери ВхШхД (Дълбочината „Д“ не включва лоста за управление)	225x140x130 mm	150x105x70 mm
4.3.8	Тегло, kg	Да се посочи	1,7



гр.Петрич 2850, Промислена зона
ул."Свобода"49
тел.:00359 745 60743; факс:00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул."Викторо Вазарини"бл.5
тел.:00359 2 669 0696; факс:00359 2 959 9334
e-mail:sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.1


Точно означение на типа, производителя и страната на производство (произход) и последно издание на каталога на производителя

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/“

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

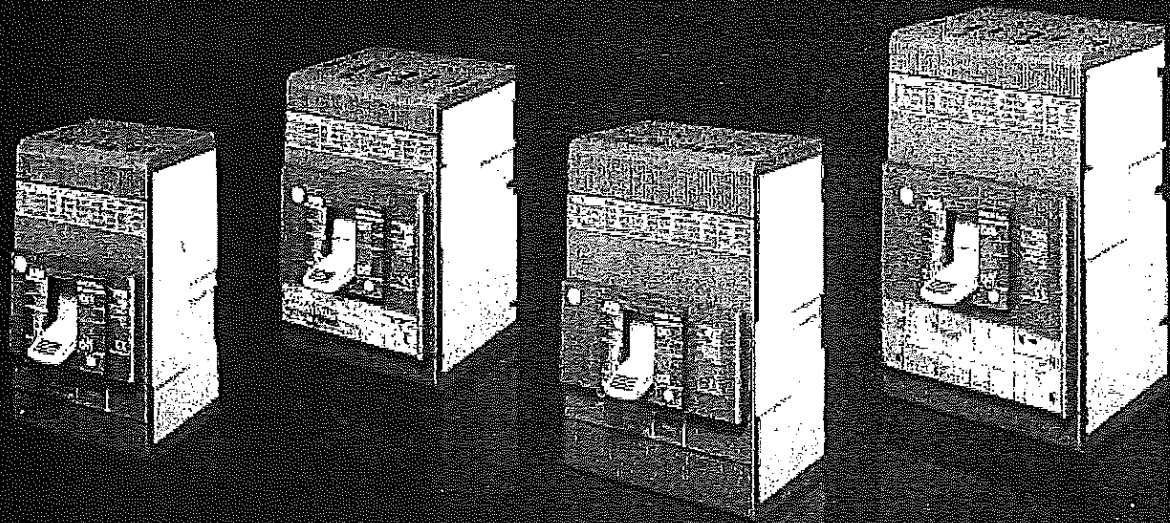

Technical catalogue - 2017.06

SACE Tmax XT

New low voltage moulded-case circuit-breakers up to 250 A



ABB

Construction characteristics

		XT1				
Size ^(62.1)	[A]	160				
Poles	[No.]	3, 4				
Rated service voltage, Ue ^(62.4)	(AC) 50-60Hz	690				
	(DC)	500				
Rated insulation voltage, Ui ^(62.5)	[V]	800				
Rated impulse withstand voltage, Uimp ^(62.6)	[kV]	8				
Versions		Fixed, Plug-In ⁽⁶⁾				
Breaking capacities according to IEC 60947-2		B	C	N	S	H
Rated ultimate short-circuit breaking capacity, Icu ^(62.7)						
Icu @ 220-230-240V 50-60Hz (AC)	[kA]	25	40	65	85	100
Icu @ 380V 50-60Hz (AC)	[kA]	18	25	36	50	70
Icu @ 415V 50-60Hz (AC)	[kA]	18	25	36	50	70
Icu @ 440V 50-60Hz (AC)	[kA]	15	25	36	50	65
Icu @ 500V 50-60Hz (AC)	[kA]	8	18	30	36	50
Icu @ 525V 50-60Hz (AC)	[kA]	6	8	22	35	35
Icu @ 690V 50-60Hz (AC)	[kA]	3	4	6	8	10
Icu @ 250V (DC) 2 poles in series	[kA]	18	25	36	50	70
Icu @ 500V (DC) 2 poles in series	[kA]	-	-	-	-	-
Icu @ 500V (DC) 3 poles in series ⁽⁶⁾	[kA]	18	25	36	50	70
Rated service short-circuit breaking capacity, Ics ^(62.8)						
Ics @ 220-230-240V 50-60Hz (AC)	[kA]	100%	100%	75% (50)	75%	75%
Ics @ 380V 50-60Hz (AC)	[kA]	100%	100%	100%	100%	75%
Ics @ 415V 50-60Hz (AC)	[kA]	100%	100%	100%	75%	50% (37.5)
Ics @ 440V 50-60Hz (AC)	[kA]	75%	50%	50%	50%	50%
Ics @ 500V 50-60Hz (AC)	[kA]	100%	50%	50%	50%	50%
Ics @ 525V 50-60Hz (AC)	[kA]	100%	100%	50%	50%	50%
Ics @ 690V 50-60Hz (AC)	[kA]	100%	100%	75% (5)	50% (5)	50%
Ics @ 250V (DC) 2 poles in series	[kA]	100%	100%	100%	100%	75%
Ics @ 500V (DC) 2 poles in series	[kA]	-	-	-	-	-
Ics @ 500V (DC) 3 poles in series ⁽⁶⁾	[kA]	100%	100%	100%	100%	75%
Rated short-circuit making capacity, Icm ^(62.10)						
Icm @ 220-230-240V 50-60Hz (AC)	[kA]	52.5	84	143	187	220
Icm @ 380V 50-60Hz (AC)	[kA]	36	52.5	75.6	105	154
Icm @ 415V 50-60Hz (AC)	[kA]	36	52.5	75.6	105	154
Icm @ 440V 50-60Hz (AC)	[kA]	30	52.5	75.6	105	143
Icm @ 500V 50-60Hz (AC)	[kA]	19.6	36	63	75.6	105
Icm @ 525V 50-60Hz (AC)	[kA]	9.18	13.6	46.2	73.5	73.5
Icm @ 690V 50-60Hz (AC)	[kA]	4.26	5.88	9.18	13.6	17
Breaking capacities according to NEMA-AB1						
@ 240V 50-60Hz (AC)	[kA]	25	40	65	85	100
@ 480V 50-60Hz (AC)	[kA]	8	18	30	36	65
Utilisation Category (IEC 60947-2)		A				
Reference Standard		IEC 60947-2				
Isolation behaviour		✓				
Mounted on DIN rail		DIN EN 50022				
Mechanical life ^(62.14)		[No. Operations]	25000			
		[No. Hourly operations]	240			
		[No. Operations]	8000			
		[No. Hourly operations]	120			
Electrical life @ 415 V (AC) ^(62.13)			76.2 x 70 x 130			
Dimensions - Fixed		3 poles	[mm]			
Width x Depth x Height		4 poles	[mm]			
			101.6 x 70 x 130			
Total opening time						
Circuit-breaker with shunt opening release		[ms]	15			
Circuit-breaker with undervoltage release		[ms]	15			
Trip units for power distribution						
TMD/TMA			Ⓜ			
TMD/TMF			Ⓜ			
Ekip LS/I						
Ekip I						
Ekip LSI						
Ekip LSI/G						
Ekip E						
Trip units for motor protection			Ⓜ			
MF/MA						
Ekip M-I						
Ekip M-LIU						
Ekip M-LRIU						
Trip units for generator protection						
TMG						
Ekip G-LS/I						
Trip units for oversized Neutral Protection						
Ekip N-LS/I						
Interchangeable protection trip units						
Weight - Fixed		3/4 poles	[kg]			
Plug in (EF terminals)		3/4 poles	[kg]			
Withdrawable (EF terminals)		3/4 poles	[kg]			
			1.1 / 1.4			
			2.21 / 2.82			


⁽⁶⁾ Icu=100kA and Ics=100%Icu @690V only for XT4 160. Please ask ABB SACE about availability
⁽⁶⁾ XT1 plug-in In max=125A

^(A) XT1 500V DC 4 poles in series
^(B) XT4 750V DC please ask ABB SACE for availability

^(M) Complete circuit-breaker
^(A) Loose trip unit

Construction characteristics


The references in round brackets ^(Gx) in the technical catalogue refer to the Glossary in the final charter of the technical catalogue.



Positive operation

All the moulded-case circuit-breakers in the SACE Tmax XT family are realized in accordance with the following construction characteristics:

- double insulation^(G1.6);
- positive operation^(G1.6);
- isolation behaviour^(G1.7);
- electromagnetic compatibility^(G1.8);
- tropicalization^(G1.9);
- impact and vibration resistance^(G1.10);
- power supply from the top towards the bottom or vice versa;
- versatility of the installation. It is possible to mount the circuit-breaker in horizontal, vertical, or lying down position without any derating of the rated characteristics;
- no nominal performance derating for use up to an altitude of 2000m. Above 2000m, the properties of the atmosphere (composition of the air, dielectric strength, cooling power and pressure) change, having an impact on the main parameters which define the circuit-breaker. The table below gives the changes to the main performance parameters;




Installation positions

Altitude		2000m	3000m	4000m	5000m
Rated employ voltage, U _e	[V]	690	600	540	470
Rated uninterrupted current	%	100	98	93	90

- the SACE Tmax XT circuit-breakers can be used in environments where the temperature is between -25°C and +70°C and stored in environments where the temperature is between -40°C and +70°C. To use temperatures other than 40°C, see the "Temperature Performances" paragraph of the Characteristic Curves and the technical information chapter;


- different degrees of protection IP (International Protection)^(G 1.11);



Protection degrees

Circuit-breaker	With front	Without front ⁽¹⁾	With Front for lever -FLD-	With rotary Handles	With transmitted rotary handle and accessory IP54	With high terminal covers HTC	With low terminal covers LTC
A	IP40	IP20	IP40	IP40	IP54	IP40	IP40
B	IP20	IP20	IP20	IP20	IP20	IP40	IP40
C	NC	NC	NC	NC	NC	IP40	IP30

⁽¹⁾ During the installation of electrical accessories
NC Not classifiable




Test pushbutton

Accessories	Motor operator MOD, MOE or MOE-E	Residual current devices	Residual current from switchboard RCQ020	Automatic Transfer Switch ATS021 and ATS022
On Front	IP30	IP40	IP41	IP40

- all the circuit-breakers in the XT family are fitted with a test pushbutton which allows the release test to be done. This test must be carried out with the circuit-breaker closed and with no current.

Regulations and Reference Standards



Hologram

Conformity with Standards

The SACE Tmax XT circuit-breakers and their accessories are constructed in conformity with:

- Standard^(G6.1):
 - IEC 60947-2;
- Directives^(G6.2):
 - EC "Low Voltage Directive" (LVD) nr. 2014/35/EC;
 - EC "Electromagnetic Compatibility Directive" (EMC) 2014/30/EC;
- Naval Registers^(G6.3) (ask ABB SACE for the versions available):
 - Lloyd's Register of Shipping, Germanischer Lloyd, Bureau Veritas, Rina, Det Norske Veritas, Russian Maritime Register of Shipping, ABS.

Certification of conformity with the product Standards is carried out in the ABB SACE tests laboratory (accredited by SINAL) in respect of the EN 45011 European Standard, by the Italian certification body ACAE (Association for Certification of Electrical Apparatus), member of the European LOVAG organisation (Low Voltage Agreement Group) and by the Swedish certification body SEMKO belonging to the international IECCE organisation.

The SACE Tmax XT series has a hologram on the front, obtained using special anti-forgery techniques, a guarantee of the quality and genuineness of the circuit-breaker as an ABB SACE product.



Naval Registers

Company Quality System

The ABB SACE Quality System conforms with the following Standards:

- ISO 9001 international Standard;
- EN ISO 9001 (equivalent) European Standards;
- UNI EN ISO 9001 (equivalent) Italian Standards;
- IRIS International Railway Industry Standard.

The ABB SACE Quality System attained its first certification with the RINA certification body in 1990.

Environmental Management System, Social Responsibility and Ethics

Attention to protection of the environment is a priory commitment for ABB SACE. Confirmation of this is the realisation of an Environmental Management System certified by RINA (ABB SACE was the first industry in the electromechanical sector in Italy to obtain this recognition) in conformity with the International ISO14001 Standard. In 1999 the Environmental Management System was integrated with the Occupational Health and Safety Management System according to the OHSAS 18001 Standard and later, in 2005, with the SA 8000 (Social Accountability 8000) Standard, committing itself to respect of business ethics and working conditions.

The commitment to environmental protection becomes concrete through:

- selection of materials, processes and packaging which optimise the true environmental impact of the product;
- use of recyclable materials;
- voluntary respect of the RoHS directive^(G6.4).

ISO 14001, 18001 and SA8000 recognitions together with ISO 9001 made it possible to obtain RINA BEST FOUR CERTIFICATION.

Warranty

Standard warranty for ABB Low Voltage circuit breakers is 1-year standard, but it can be extended up to 5 years. Extended warranty activation can be requested after the online registration in the Extended Warranty tool. This web-tool verifies that the application of the circuit breaker is within the recommended guidelines, and grant the registration of the circuit breaker. When end users details are registered, one year of extra warranty is offered free-of-charge.

Extended Warranty can be ordered by following the steps:

- Registration in the online tool (Extended Warranty Tool) to verify the application. Use QR code below to access the tool
- Extended Warranty part number(s) and registration code received by email
- Place the order of the circuit breaker(s) together with:
 - Extended warranty part number(s)
 - Unique registration code.


Warranty coverage:

- Any possible issues related to circuit breaker quality for the complete extra warranty time
- Accessories mounted by the factory only.


Identification of the SACE Tmax XT circuit-breakers

The characteristics of the circuit-breaker are given on the rating nameplate on the front of the circuit-breaker, and on the side rating plate.

Front label

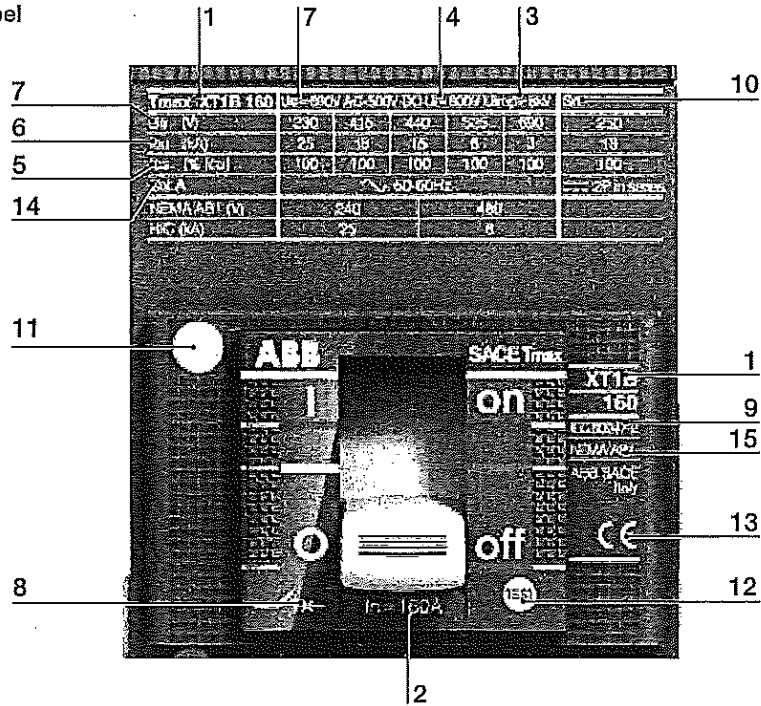

Side label

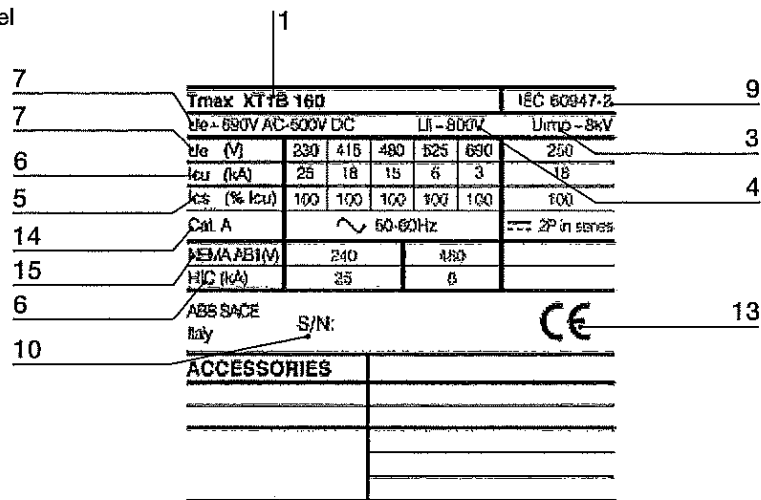

- 1 Name of the circuit-breaker and performance level⁽¹⁾
- 2 In: rated current of the circuit-breaker⁽¹⁾
- 3 Uimp: rated impulse withstand voltage⁽¹⁾
- 4 Ui: insulation voltage⁽¹⁾
- 5 Ics rated short-circuit duty breaking capacity⁽¹⁾
- 6 Icu: rated ultimate short-circuit breaking capacity⁽¹⁾
- 7 Ue: rated service voltage⁽¹⁾
- 8 Symbol of isolation behaviour⁽¹⁾
- 9 Reference Standard IEC 60947-2⁽¹⁾
- 10 Serial number
- 11 Anti-forgery logo
- 12 Test pushbutton
- 13 -CE marking
- 14 Utilisation Category
- 15 Reference Standard NEMA-AB1

⁽¹⁾ In compliance with the IEC 60947-2 Standard

Nomenclature of the trip units and residual current protection devices

The tables below give details of the logic with which each thermomagnetic trip units, electronic trip units and residual current devices has been named.

Magnetic trip units		
Family Name		Protection
M: magnetic	+	F: with fixed threshold A: with adjustable threshold

Thermomagnetic trip units		
Family Name		Protection
TM: thermomagnetic	+	A: with adjustable thermal and magnetic threshold D: with adjustable thermal and fixed magnetic threshold G: with adjustable thermal and fixed magnetic threshold (for generator protection)

Example:

- MA: magnetic only trip unit, with adjustable protection threshold;
- TMD: thermomagnetic trip unit, with adjustable thermal and fixed magnetic protection threshold;
- TMG: thermomagnetic trip unit, with adjustable thermal and fixed magnetic protection threshold, specifically for protection of generators.

Electronic trip units					
Family Name		Application		Protection	Circuit-breaker ⁽¹⁾
Ekip	+: Distribution M: Motor protection G: Generator protection N: Neutral E: Energy measurements	+	I LS/I LSI LSIG LIU LRIU	XT2 XT4

⁽¹⁾ Circuit-breaker has to be defined only with loose release.

Example:

- Ekip LS/I: electronic trip unit for distribution networks protection, with "L" against overload and as an alternative "S" protection function against delay short circuit or "I" protection function against instantaneous short circuit;
- Ekip M-LRIU: electronic trip unit for motors protection, with LRIU protection functions;
- Ekip N-LSI/XT2: loose electronic trip unit for the neutral protection, with "L" against overload and as an alternative "S" protection function against delay short circuit or "I" protection function against instantaneous short circuit.

Residual Current Protection Devices

Family Name		Typology
RC	+	Inst: instantaneous type "A" Sel: selective type "A" Sel 200: selective type "A" reduced to 200mm B Type: selective type "B"

Example:

- RC Inst: residual current protection device with instantaneous timing;
- RC Sel 200: residual current protection device with adjustable time trip, reduced to 200mm;
- RC B type: residual current protection device "B" type.

The SACE Tmax XT family ranges

The SACE Tmax XT moulded-case circuit-breaker family complies with different installation requirements. Circuit-breakers are available with trip units dedicated to different applications, such as power distribution, generator protection, motor protection and oversized neutral protection. Some of these circuit-breakers can also be used in communication systems and plants that function at 400Hz. Switch-disconnectors are also available.

In = Rated uninterrupted current ^(62,2)	XT1 160	XT2 160	XT3 250	XT4 250
Power distribution				
Thermomagnetic trip units				
TMD/TMF	16...160		63...250	
TMD/TMA		1.6...160		16...250
Electronic trip units				
Ekip LS/I		10...160		40...250
Ekip I		10...160		40...250
Ekip LSI		10...160		40...250
Ekip LSIG		10...160		40...250
Ekip E-LSIG				40...250
Motor protection				
Magnetic trip units				
MF/MA	3.2...125	1...160 ⁽¹⁾	100...200 ⁽¹⁾	10...200 ⁽¹⁾
Electronic trip units				
Ekip M-I		20...100 ⁽¹⁾		
Ekip M-LIU		25...160 ⁽¹⁾		40...160 ⁽¹⁾
Ekip M-LRIU		25...100 ⁽¹⁾		40...200 ⁽¹⁾
Generator Protection				
Thermomagnetic trip units				
TMG		16...160	63...250	
Electronic trip units				
Ekip G-LSI		10...160		40...250
Oversized Neutral Protection 160%				
Electronic trip units				
Ekip N-LS/I		10...100 ⁽²⁾		40...160 ⁽²⁾
Switch-disconnectors				
	☒		☒	☒
Special applications				
30Hz	☒	☒	☒	☒
Communication				
		☒		☒

⁽¹⁾ Only 3 poles version
⁽²⁾ Only 4 poles version

Circuit-breakers for power distribution

Main characteristics

SACE Tmax XT moulded-case circuit-breakers are the ideal solution for all distribution levels, from the main low voltage switchboard to the subswitchboards in the installation. They feature high specific let-through current peak and energy limiting characteristics that allow the circuits and equipment on the load side to be sized in an optimum way. SACE Tmax XT circuit-breakers with thermomagnetic and electronic trip units protect against overloads, short-circuits, earth faults and indirect contacts in low voltage distribution networks.

The SACE Tmax XT family of moulded-case circuit-breakers can be equipped with:

- thermomagnetic trip units^(3,2), for direct and alternating current network protection, using the physical properties of a bimetal and an electromagnet to detect the overloads and short-circuits;
- electronic trip units^(3,4), for alternating current network protection. Releases with microprocessor technology obtain protection functions that make the operations extremely reliable and accurate. The power required for operating them correctly is supplied straight from the current sensors of the releases. This ensures that they trip even in single-phase conditions and on a level with the minimum setting.

The electronic protection trip unit consists of:

- 3 or 4 current sensors (current transformers);
- a protection unit;
- an opening solenoid (built into the electronic trip unit).

Characteristics of Electronic trip units SACE Tmax XT

Operating temperature	-25°C...+70°C
Relative humidity	98%
Self-supplied	0.2xIn (single phase) ⁽¹⁾ (2)
Auxiliary supply (where applicable)	24V DC ± 20%
Operating frequency	45...66Hz or 360...440Hz
Electromagnetic compatibility	IEC 60947-2 Annex F

⁽¹⁾ 0,32 x In for Ekip N-LS/I

⁽²⁾ For 10A: 0,4In

Circuit-breakers for power distribution

Main characteristics

Characteristics of circuit-breakers for power distribution

		XT1	XT2	XT3	XT4
Size ^(92.1)	[A]	160	160	250	160/250
Poles	[Nr.]	3, 4	3, 4	3, 4	3, 4
Rated service voltage, U_e ^(92.4)	(AC) 50-60Hz	[M] 690	690	690	690
	(DC)	[M] 500	500	500	500
Rated insulation voltage, U_j ^(92.5)	[M]	800	1000	800	1000
Rated impulse withstand voltage, U_{imp} ^(92.6)	[kV]	8	8	8	8
Versions		Fixed, Plug-in	Fixed, Withdrawable, Plug-in	Fixed, Plug-in	Fixed, Withdrawable, Plug-in
Breaking capacities		B C N S H	N S H L V	N S	N S H L V
Trip units		Thermomagnetic	Thermomagnetic, Electronic	Thermomagnetic	Thermomagnetic, Electronic
TMD/TMA			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
TMD/TMF		<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>	
Ekip LS/I			<input checked="" type="checkbox"/> In = 10A, 25A, 63A, 100A, 160A		<input checked="" type="checkbox"/> In = 40A, 63A, 100A, 160A, 250A
Ekip I			<input checked="" type="checkbox"/> In = 10A, 25A, 63A, 100A, 160A		<input checked="" type="checkbox"/> In = 40A, 63A, 100A, 160A, 250A
Ekip LSI			<input checked="" type="checkbox"/> In = 10A, 25A, 63A, 100A, 160A		<input checked="" type="checkbox"/> In = 40A, 63A, 100A, 160A, 250A
Ekip LSIG			<input checked="" type="checkbox"/> In = 10A, 25A, 63A, 100A, 160A		<input checked="" type="checkbox"/> In = 40A, 63A, 100A, 160A, 250A
Ekip E-LSIG					<input checked="" type="checkbox"/> In = 40A, 63A, 100A, 160A, 250A
Interchangeability			<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>

Complete circuit-breaker

Circuit-breakers for power distribution

Thermomagnetic trip units

TMD/TMF


Main characteristics:

- available for XT1 and XT3 in the three-pole and four-pole versions;
- protections:
 - against overload (L): adjustable protection threshold from 0.7...1xIn, with inverse long-time trip curve (TMD)*;
 - against instantaneous short-circuits (I): fixed 10xIn protection threshold, with instantaneous trip curve;
- 100% neutral protection in four-pole circuit-breakers. 50% neutral protection is only available for In ≥ 125A;
- the thermal protection setting is made by turning the relative cursor on the front of the release.

* fixed protection at 1xIn (TMF)

Example with XT3 250A

Rotary switch for thermal protection setting

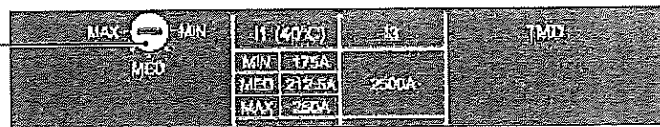

XT1

TMD/TMF

Breaking capacity		TMD/TMF	TMD	TMD	TMD	TMD	TMD	TMD	TMD	TMD	TMD	TMD
 $I_1 = 1xIn$ (TMF)	In [A]	16*	20*	25	32	40	50	63	80	100	125	160
	Neutral [A] - 100%	16	20	25	32	40	50	63	80	100	125	160
	Neutral [A] - 50%	-	-	-	-	-	-	-	-	-	80	100
 $I_2 = 0.7...1xIn$ (TMD)	I_2 [A]	450	450	450	450	450	500	630	800	1000	1250	1600
	Neutral [A] - 100%	450	450	450	450	450	500	630	800	1000	1250	1600
	Neutral [A] - 50%	-	-	-	-	-	-	-	-	-	800	1000
 $I_3 = 10xIn$	I_3 [A]	450	450	450	450	450	500	630	800	1000	1250	1600
	Neutral [A] - 100%	450	450	450	450	450	500	630	800	1000	1250	1600
	Neutral [A] - 50%	-	-	-	-	-	-	-	-	-	800	1000

* 16A and 20A for N, S, H have the TMF trip unit

XT3

TMD

 $I_1 = 0.7...1xIn$	In [A]	63	80	100	125	160	200	250
	Neutral [A] - 100%	63	80	100	125	160	200	250
	Neutral [A] - 50%	-	-	-	80	100	125	160
 $I_2 = 10xIn$	I_2 [A]	630	800	1000	1250	1600	2000	2500
	Neutral [A] - 100%	630	800	1000	1250	1600	2000	2500
	Neutral [A] - 50%	-	-	-	800	1000	1250	1600

Accessories

Versions and types



Fixed circuit-breaker


Tmax XT automatic circuit-breakers are available in the following versions:

- **FIXED.** Fixed circuit-breakers consist of a current-interrupting part connected to the trip unit, to be installed on the back plate of the cubicle or on a DIN rail;
- **PLUG-IN.** Plug-in circuit-breakers consist of a fixed part that must be installed on the back plate of the cubicle, and of a moving part, obtained from the fixed circuit-breaker plus the relative kit that converts it from the fixed version into the moving part of the plug-in version;
- **WITHDRAWABLE.** Withdrawable circuit-breakers consist of a fixed part that must be installed on the back plate of the cubicle equipped with side runners to allow the moving part to be easily racked out and in, which is obtained from the fixed circuit-breaker plus the relative kit that converts it from the fixed version into the withdrawable moving part. To obtain the withdrawable version, a front accessory to be applied onto the front of the circuit-breaker must be ordered so as to maintain the IP40 degree of protection over the entire isolation run of the circuit-breaker.

If the plug-in circuit-breaker is fitted with electrical accessories, the appropriate connectors for isolation of the relative auxiliary circuits must also be ordered on the other hand, for the withdrawable version there are dedicated accessories, fitted with connectors which allow automatic disconnection in the case of racking-out (consult the "connection of electrical accessories" section in the Accessories chapter).

Starting from the fixed version, SACE Tmax XT circuit-breakers can easily be converted into the plug-in and withdrawable versions using the relative conversion kits.

The moving part can always be obtained in the required version, fully pre-engineered in the factory, by ordering the fixed circuit-breaker and the conversion kit at the same time.



Plug-in circuit-breaker

	Version		
	Fixed	Plug-in	Withdrawable
XT1	■	■	
XT2	■	□	■
XT3	□	■	
XT4	■	■	■


Fixed part of plug-in and withdrawable versions

The fixed parts of the plug-in/withdrawable versions are available with front terminals (F) or with horizontal or vertical rear terminals (HR/VR). The terminals are factory-mounted in the horizontal position. In case of need, the Customer can easily rotate the terminals into the vertical position. These fixed parts can be equipped with the same terminal, terminal-cover and phase separator kits used for the fixed circuit-breakers, using the proper adapter.

The fixed parts of a plug-in/withdrawable circuit-breaker can be installed at a distance of 50mm from the back of the panel or at 70mm as shown in the picture. Installation at 50mm is only compulsory in the case where rear vertical or horizontal terminals (HR/VR) are used.




Withdrawable circuit-breaker

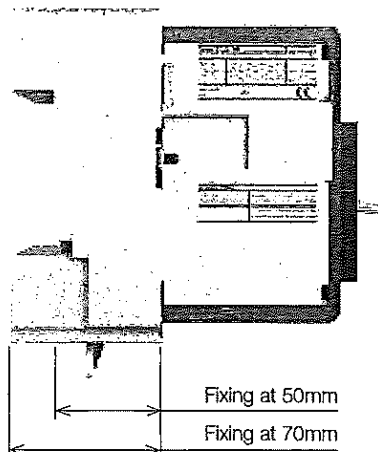


Front terminals - F

CB.	Vers.	Busbar dimensions [mm]						Cable terminals [mm]		Tightening		H Terminal covers [mm]			H Separators [mm]		
		W min	W max	H	Ø	D min	D max	W	Ø	Cable or busbar /Terminal		2	50	60	25	100	200
XT1	F	13	16	7,5	6,5	3,5	5	16	6,5	M6	6Nm	-	R	-	S	R	R
XT2	F	13	20	7,5	6,5	2,5	5	20	6,5	M6	6Nm	-	R	-	S	R	R
XT3	F	17	24	9,5	8,5	5	8	24	8,5	M8	8Nm	-	-	R	S	R	R
XT4	F	17	25	10	8,5	5	8	25	8,5	M8	8Nm	-	-	R	S	R	R

Front terminal - F



F terminal with cable lug




F terminal with busbar


Front extended terminals - EF

CB	Vers.	Busbar dimensions MAX [mm]			Cable terminals [mm]		Tightening				H Terminal covers [mm]			H Separators [mm]		
		W	D	Ø	W	Ø	Terminal /CB	Cable or busbar /Terminal			2	50	60	25	100	200
XT1	F	20	4	8,5	20	8,5	M6	6Nm	M8	9Nm	-	R	-	-	S	R
XT2	F	20	4	8,5	20	8,5	M6	6Nm	M8	9Nm	-	S	-	-	S	R
XT3	F	20	6	10	20	10	M8	8Nm	M10	18Nm	-	-	R	-	S	R
XT4	F	20	10	10	20	10	M8	8Nm	M10	18Nm	-	-	S	-	S	R


Front extended terminal - EF



EF terminal with cable lug



EF terminal with busbar



W Width
H Hole Height
D Depth

F Fixed
P Plug-in
W Withdrawable
Ø Diameter
S Standard
B On Request

Accessories


Mechanical Accessories

Front extended spread terminals - ES


CB	Vers.	Busbar dimensions MAX [mm]			Cable terminals [mm]		Tightening				H Terminal covers [mm]			H Separators [mm]		
		W	D	Ø	W	Ø	Terminal /CB	Cable or busbar /Terminal		2	50	60	25	100	200	
XT1	F-P	25	4	8.5	25	8.5	M6	6Nm	M8	9Nm	-	-	-	-	-	S
XT2	F-P-W	30	4	10.5	30	10.5	M6	6Nm	M10	18Nm	-	-	-	-	-	S
XT3	F-P	30	4	10.5	30	10.5	M8	8Nm	M10	18Nm	-	-	-	-	-	S
XT4	F-P-W	30	6	10.5	30	10.5	M8	8Nm	M10	18Nm	-	-	-	-	-	S



Front extended spread terminal - ES



ES terminal with cable lug



ES terminal with busbar


Terminals for copper cables - FCCu

CB	Type of terminal	Vers.	Cable [mm ²]		Tightening		L cable stripping [mm]	H Terminal covers [mm]			H Separators [mm]		
			Rigid	Flexible	Cable or busbar /Terminal			2	50	60	25	100	200
XT1	internal	F-P	1x2.5...70	1x2.5...50	12x12mm	7Nm	12	-	R	-	S ⁽¹⁾	R	R
	internal	F-P	-	2x2.5...35				-	R	-	S ⁽¹⁾	R	R
XT2	internal	F-P-W	1x1...95	1x4...70	14x14mm	≤50mm ² : 7Nm >50mm ² : 8,5Nm	14	-	R	-	S ⁽¹⁾	R	R
	internal	F-P-W	-	2x2.5...50				-	R	-	S ⁽¹⁾	R	R
XT3	internal	F-P	1x6...185	1x6...150	20x18mm	14Nm	20	-	-	R	S ⁽¹⁾	R	R
	internal	F-P	-	2x6...70				-	-	R	S ⁽¹⁾	R	R
XT4	internal	F-P-W	1x6...185	1x6...150	20x18mm	14Nm	20	-	-	R	S ⁽¹⁾	R	R
	internal	F-P-W	-	2x6...70				-	-	R	S ⁽¹⁾	R	R


⁽¹⁾ Phase separators supplied as standard with basic version circuit-breaker




FCCu terminal



FCCu terminal with cable



FCCu terminal with busbar





W Width
H Hole Height
D Depth

F Fixed
P Plug-in
W Withdrawable
Ø Diameter
S Standard
R On Request

Terminals for copper/aluminium cables - FC CuAl

CB	Type of terminal	Vers.	Cable [mm ²]		Tightening				L cable stripping [mm]	H Terminal covers [mm]			H Separators [mm]		
			Rigid	Flexible	Terminal /CB	Cable or busbar /Terminal		2		50	60	25	100	200	
XT1	Internal	F-P	1x1.5...70	1x 1.5...50	M5	3Nm	Ø 9.5mm	≤10mm ² 2,5 Nm >10mm ² 5 Nm	16	-	R	-	S	R	R
	external	F-P	1x35...95	NO	M6	6Nm	Ø 14mm	13.5Nm	16	-	S	-	-	-	-
	external ⁽¹⁾	F-P	1x120...240	NO	M6	6Nm	Ø 24mm	31Nm	24	ADAPTER					
XT2	Internal	F-P-W	1x1...95	1x2.5...70	-	-	Ø 14mm	≤25mm ² 4 Nm >25mm ² 6 Nm	14	-	R	-	S	R	R
	external ⁽¹⁾	F-P-W	1x120...240	NO	M6	6Nm	Ø 24mm	31Nm	24	ADAPTER					
	external ⁽¹⁾	F-P-W	1x70...185	NO	M6	6Nm	Ø 18mm	31Nm	20	-	S	-	-	-	-
	external ⁽¹⁾	F-P-W	2x35...70	NO	M6	6Nm	Ø 16mm	12Nm	18/33	-	-	S	-	-	-
XT3	internal ⁽¹⁾	F-P-W	1x35...150	NO	M9	9Nm	Ø 17mm	22.6Nm	20	-	-	R	S	R	R
	internal	F-P	1x95...185	NO	-	-	Ø 17mm	16Nm	20	-	-	R	S	R	R
	external ⁽¹⁾	F-P	1x120...240	NO	M8	8Nm	Ø 24mm	31Nm	24	ADAPTER					
	external ⁽¹⁾	F-P	2x35...120	NO	M8	8Nm	Ø 18mm	16Nm	22/42	-	-	S	-	-	-
XT4	Internal	F-P-W	1x1...150	NO	-	-	Ø 17mm	10Nm	20	-	-	R	S	R	R
	external ⁽¹⁾	F-P-W	1x120...240	NO	M8	8Nm	Ø 24mm	31Nm	24	ADAPTER					
	external ⁽¹⁾	F-P-W	2x35...120	NO	M8	8Nm	Ø 18mm	16Nm	22/42	-	-	S	-	-	-

⁽¹⁾ Take-up auxiliary voltage device included

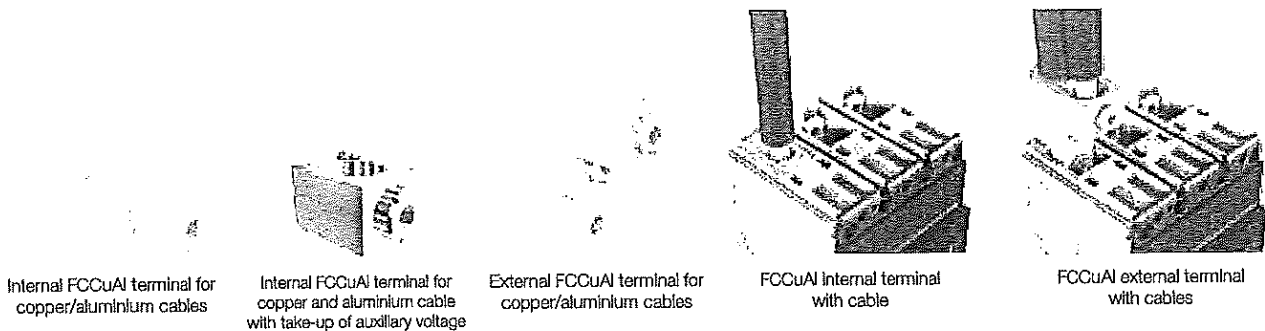


Pitch adapter

Adaptor for FCCuAl terminals up to 240mm²

Circuit-breaker	Poles	Dimensions [mm] [WxHxD]
XT1	3	105x50x68
	4	140x50x68
XT2	3	105x50x68
	4	140x50x68
XT3	3	105x50x68
	4	140x50x68
XT4	3	105x50x68
	4	140x50x68

Note: With XT1 and XT2 the adaptor increases the width of the circuit-breaker



W Width
H Hole Height
D Depth

F Fixed
P Plug-In
W Withdrawable
Ø Diameter
S Standard
R On Request

Accessories

Electrical Accessories


Electrical Accessories		XT1	XT2	XT3	XT4
Shunt opening release	SOR	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Undervoltage release	UVR	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Time-delay device for undervoltage release	LVD	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	1Q 1SY 24V DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	3Q 1SY 24V DC	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	1S51 24V DC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
	1Q 1SY 250V AC/DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Auxiliary contacts	2Q 2SY 1S51 250V AC/DC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
	3Q 2SY 250V AC/DC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
Q: open/close signalling contact	3Q 1SY 250V AC/DC	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
SY: trip signalling contact	1S51 250V AC/DC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
S51: electronic trip signalling contact	2Q 1SY 250V AC/DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	3Q on left 250V AC/DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	400V 1Q 1SY 400V AC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
	400V 2Q 400V AC	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
Position contacts	AUP-Racked-in	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	AUP-Racked-out	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
Early auxiliary contacts	AUE-In handle	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Motor operator	MOD	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>	-
	MOE	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
	MOE-E	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
Residual current devices	RC Inst	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>	-
	RC Sel 200	<input checked="" type="checkbox"/>	-	-	-
	RC Sel for XT1 XT3	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>	-
	RC Sel for XT2 XT4	-	<input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/>
	RC Sel B Type	-	-	<input checked="" type="checkbox"/>	-



Cabled SOR - UVR

Service releases

Shunt opening release (SOR). Allows the circuit-breaker to be opened by means of a non-permanent electrical control. Release operation is guaranteed for voltage between 70% and 110% of the rated power supply voltage U_n , in both alternating and direct current. SOR is equipped with a built-in limit contact to shut-off the power supply in the open position with the relay tripped. A remote controlled emergency opening command can be created by connecting an opening button to the SOR.



Cabled SOR - UVR for withdrawable circuit-breaker

Undervoltage release (UVR). Allows the circuit-breaker to open when the release is subjected to either a power failure or voltage drop. Opening, as prescribed in the Standard, is guaranteed when the voltage is between 70% to 35% of U_n . After tripping, the circuit-breaker can be closed again if the voltage exceeds the 85% of U_n . When the undervoltage release is not energized, neither the circuit-breaker nor the main contacts can be closed. A remote controlled emergency opening command can be created by connecting an opening button to the UVR.

None of the service releases in the Tmax XT series require screws for installation. They are extremely easy to fit. Just use slight pressure in the appropriate place. All service releases are available in two versions:

- cabled (AWG20 cable section - 0.5mm² up to 300V, AWG17 - 1mm² up to 525V):
 - for fixed/plug-in circuit-breakers with 1m long cables;
 - for withdrawable circuit-breakers with fixed part and moving part connector;
- not cabled:
 - for fixed/plug-in circuit-breakers with cables from 1.5 mm² in section.




Uncabled SOR - UVR

Accessories

Electrical Accessories

In circuit-breakers:

- ▣ three-pole: as an alternative, SOR or UVR can be installed in the slot on the left of the operating lever;
- ▣ four-pole: SOR or UVR can be housed at the same time in the slot of the third and fourth pole. If the circuit-breaker is the withdrawable type, the connector for the fourth pole must be ordered to be able to install SOR and UVR in the fourth pole. If there is a residual current release, the opening solenoid (SA) of the residual current device must be installed in the slot of the third pole on the left of the operating lever.

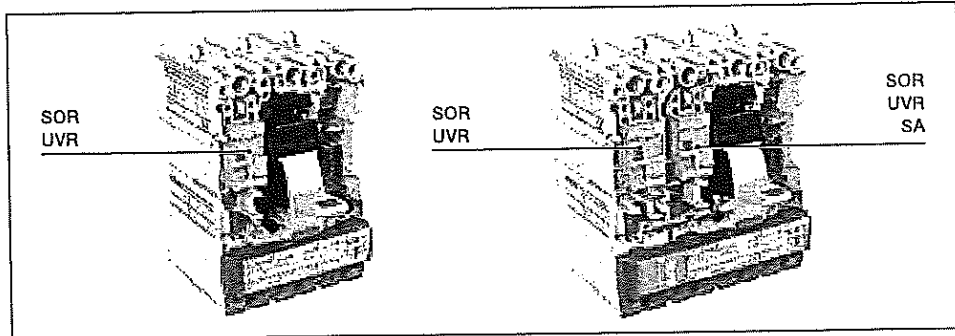


SOR Electrical specifications

Version	Max power absorbed on inrush		Resistance	
	AC [VA]	DC [W]	Internal [ohm]	External [ohm]
12V DC		50	2,67	0
24-30V AC/DC	50	50	11	0
48-60V AC/DC	60	60	62	0
110...127V AC-110...125V DC	50	50	248	0
220...240V AC-220...250V DC	50	50	930	0
380-440V AC	55		2300	0
480-525V AC	55		5830	0

UVR Electrical specification

Version	Power absorbed during normal operation		Resistance	
	AC [VA]	DC [W]	Internal [ohm]	External [ohm]
24-30V AC/DC	1,5	1,5	399	0
48V AC/DC	1	1	1447	100
60V AC/DC	1	1	2405	100
110...127V AC-110...125V DC	2	2	8351	390
220...240V AC-220...250V DC	2,5	2,5	20502	9000
380-440V AC	3		20502	39000
480-525V AC	4		20502	59000

Time delay device for undervoltage release (UVD)



Time delay device for undervoltage release

The undervoltage release (UVD) can be combined with an external electronic power supply time delay which allows circuit-breaker opening to be delayed with preset and adjustable timing if the power supply voltage of the release either drops or fails, thus preventing untimely tripping caused by temporary faults. The time delay must be used with the undervoltage release (UVR) of the corresponding voltage.

A remote control positive safety opening command can be created by connecting an opening pushbutton to the UVR combined with the UVD.





UVD - Electrical specifications

Power supply Voltage [V]	24...30V AC/DC 48...60V AC/DC 110...125V AC/DC 220...250V AC/DC
Settable delay [s]	0,25 - 0,5 - 0,75 - 1 - 1,25 - 2 - 2,5 - 3
Opening time tolerance	±15%

Trip curves with thermomagnetic trip unit

Trip curves for distribution

Handwritten signature

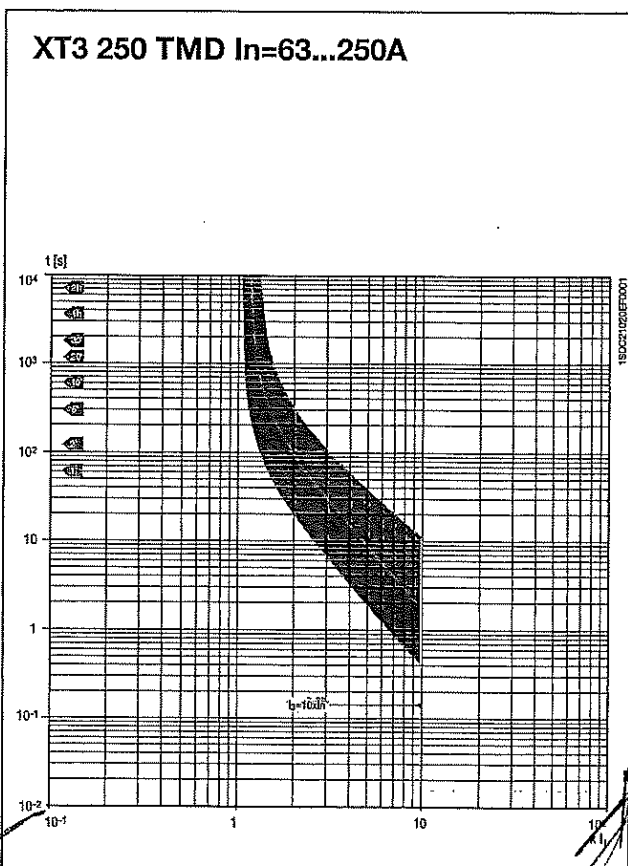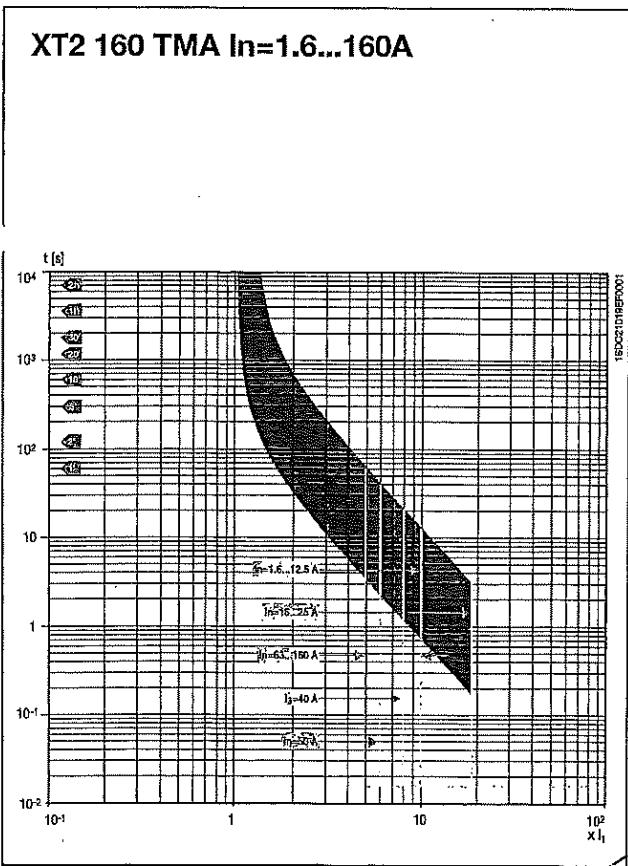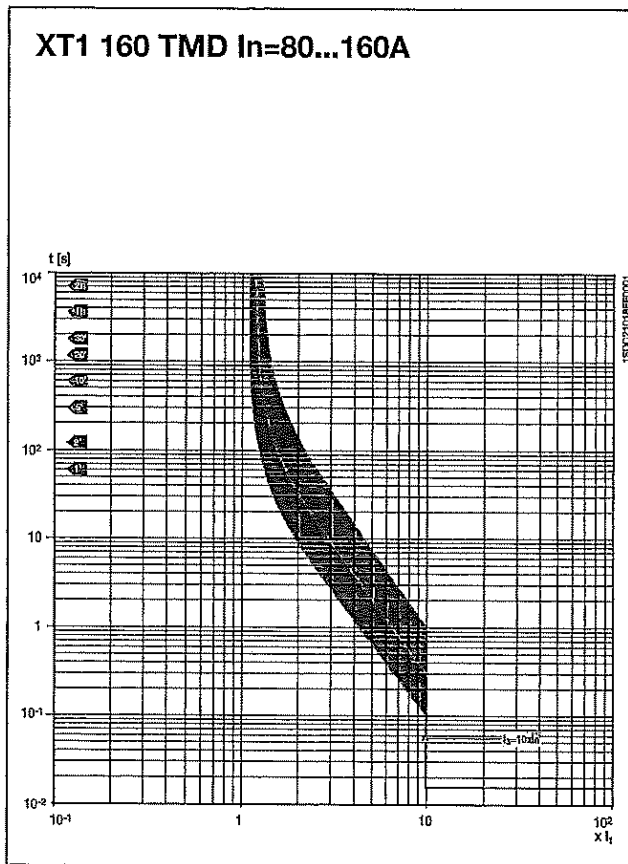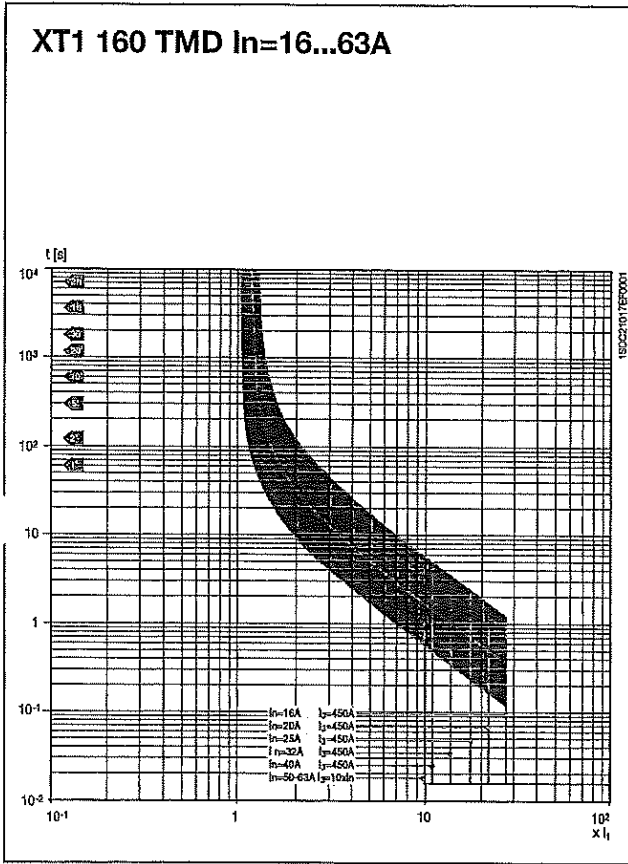

Handwritten signature

Handwritten signature


Handwritten signature

Specific let-through energy curves


500V

[Handwritten signature]


XT1
500V

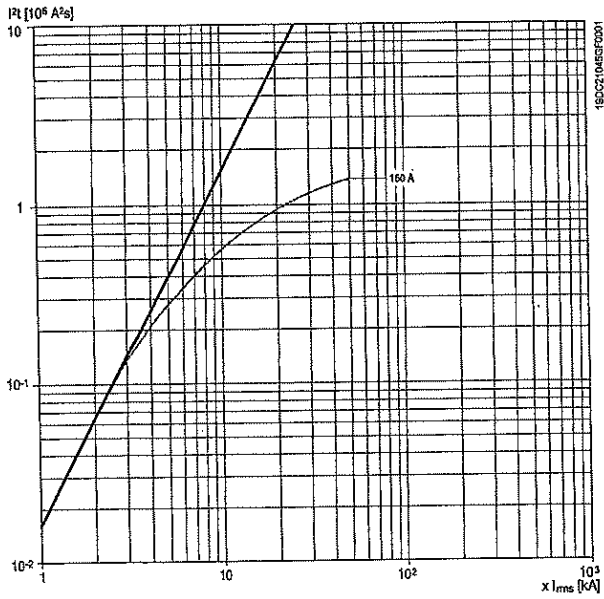


XT2
500V

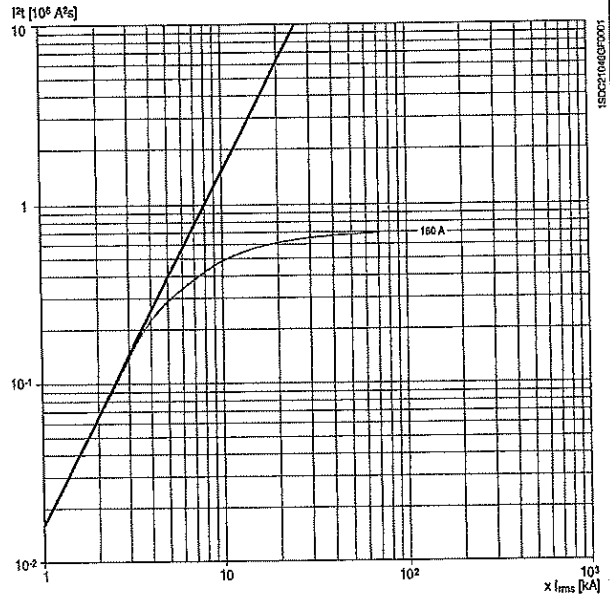

XT3
500V

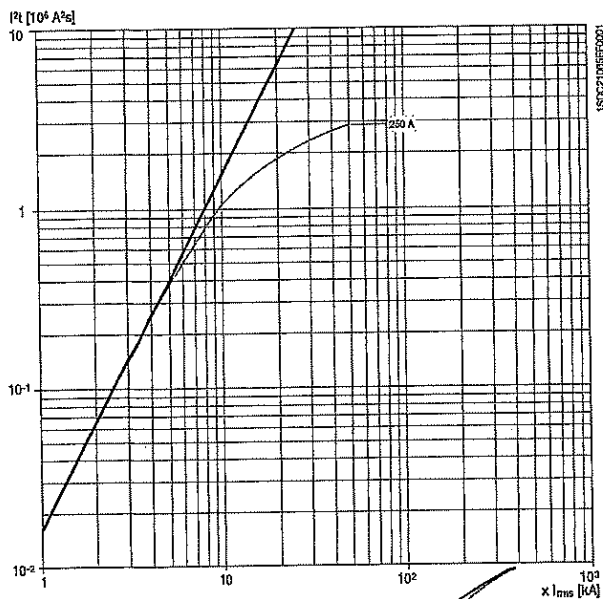

XT4
500V

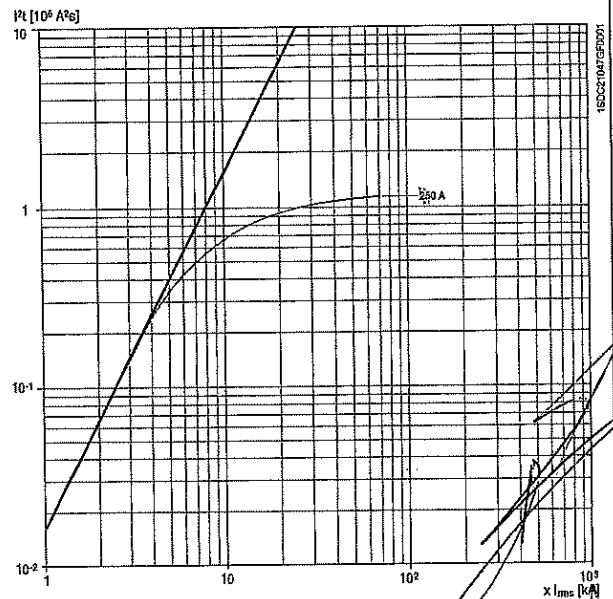

[Handwritten signature]

[Handwritten signature]

Contact us

ABB SACE
A division of ABB S.p.A.
L.V. Breakers
Via Pescaria, 5
24123 Bergamo – Italy
Phone: +39 035 395 111
Fax: +39 035 395 306-433

www.abb.com

The data and illustrations are not binding. We reserve the right to make changes in the course of technical development of the product.

© Copyright 2015 ABB.
All rights reserved.




Stay tuned. Discover more by visiting the webpages reserved to Tmax XT and be always up-to-date with the latest edition of the catalogue.

1SDC210033D0203 – 2015.10 (Preliminary)

Power and productivity
for a better world™

ABB

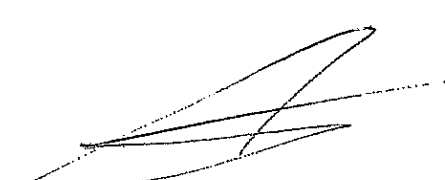



гр. Петрич 2850, Промислена зона
ул. "Свобода" 49
тел.: 00359 748 60743; факс: 00359 748 60742
e-mail: metix@metix.bg
гр. София 1000 ул. "Рицардо Вакарини" бл. 5
тел.: 00359 2 869 0696; факс: 00359 2 958 9334
e-mail: sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.2

Техническо описание и чертежи с нанесени на тях размери

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД


Overall dimensions

Tmax XT1 - Installation for fixed circuit-breaker

Fixing on support sheet

Caption

- ② Overall dimension of optional wiring ducts
- ③ 25mm insulating barriers between phases (compulsory) provided

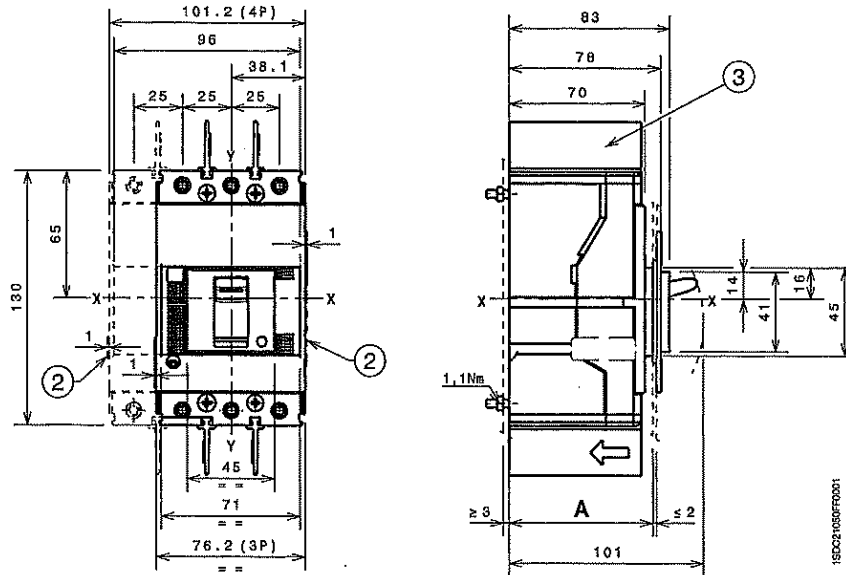


		A
With standard flange	III - IV	74
Without flange	III - IV	71
	III - IV	79


Fixing on DIN 50022 rail

Caption

- ① Bracket for fixing
- ② Overall dimension of optional wiring ducts
- ③ 25mm insulating barriers between phases (compulsory) provided
- ④ Optional front cover for DIN rail

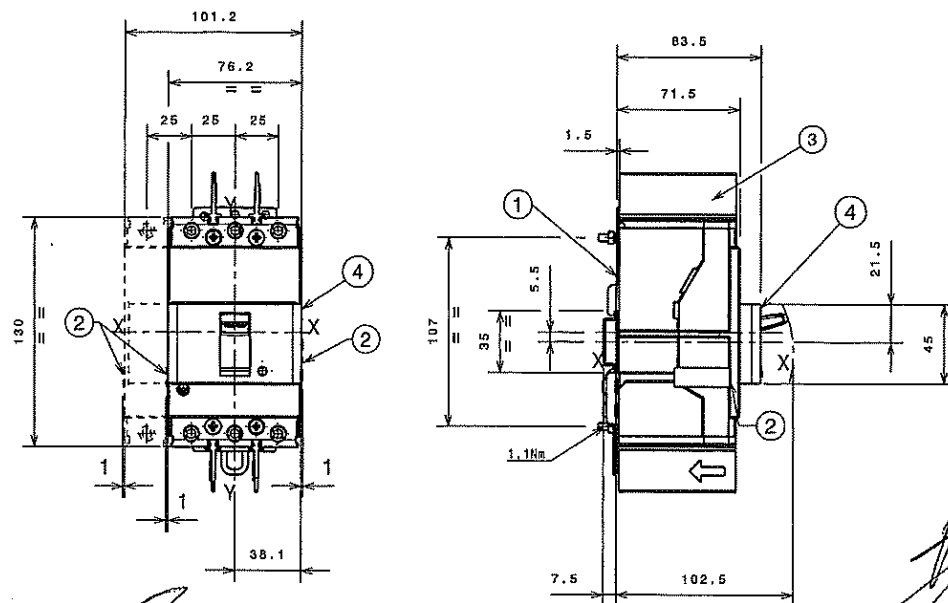

Drilling template for circuit-breaker fixing

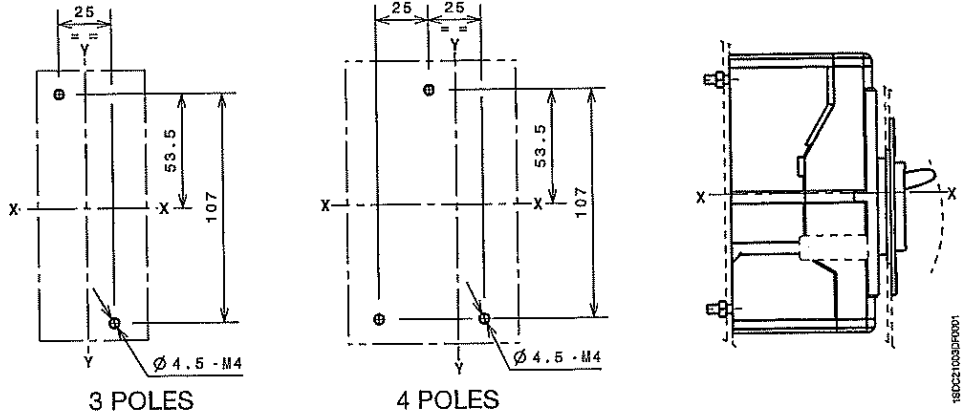


18DC21003D0204

Flanges

Caption

- ① Flange for circuit-breaker III
- ② Flange for circuit-breaker IV
- ③ Flange for circuit-breaker III with RC Sel - RC Inst residual current release
- ④ Flange for circuit-breaker IV with RC Sel - RC Inst residual current release
- ⑤ Flange for fixed circuit-breaker III-IV with direct motor operator (MOD)
- ⑥ Flange for circuit-breaker III-IV with direct rotary handle (RH-D)
- ⑦ Optional flange

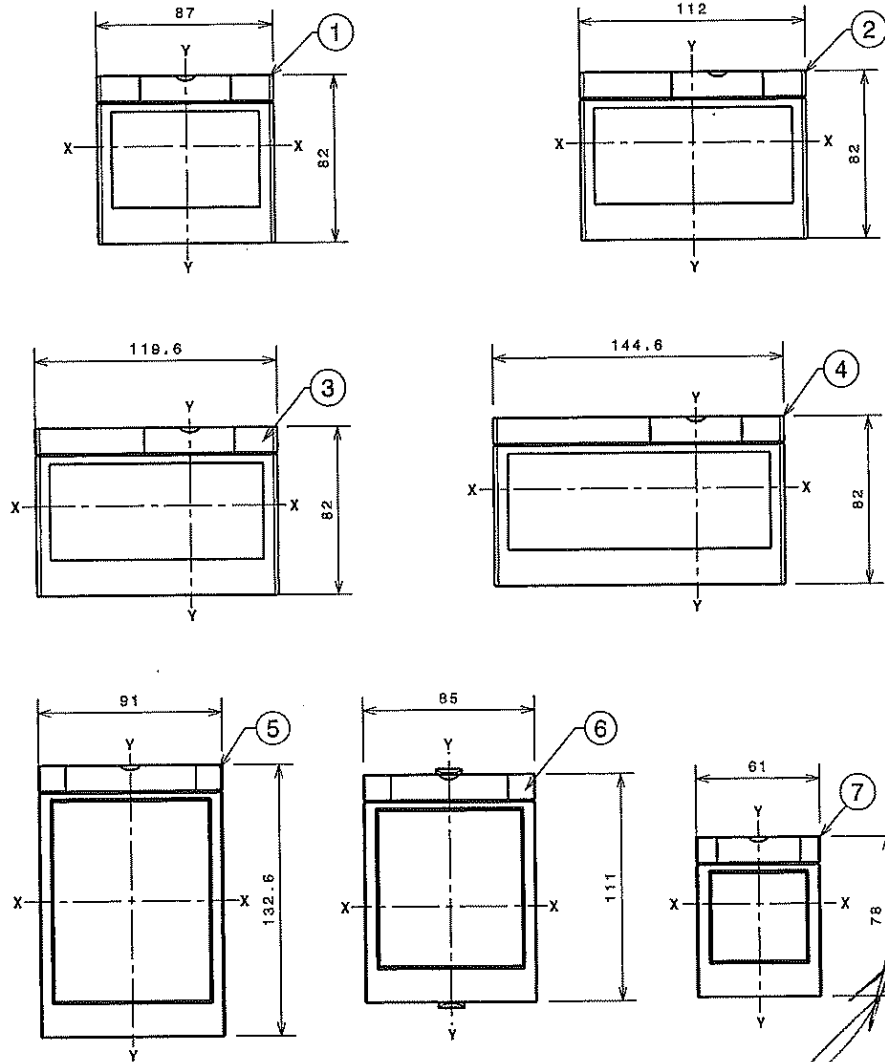

18DC21003D0204


Overall dimensions

Tmax XT1 - Installation for fixed circuit-breaker


[Handwritten signature]

Drilling templates compartment door


With standard flange

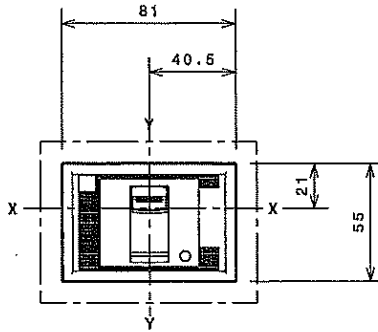

A=74
3 POLES

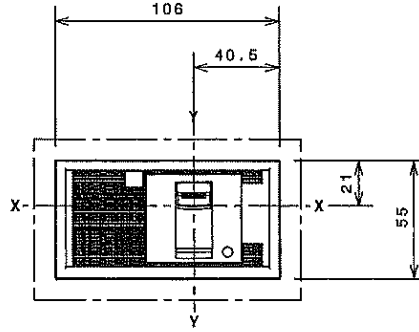


A=74
4 POLES

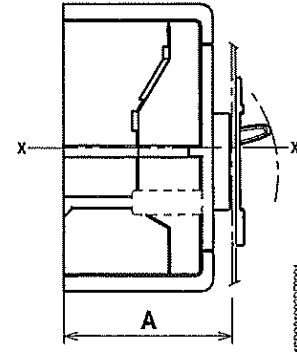


1SDC21002P001


Without flange

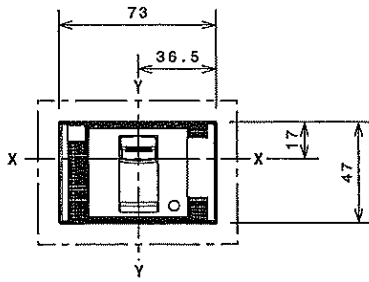

A=71
3 POLES

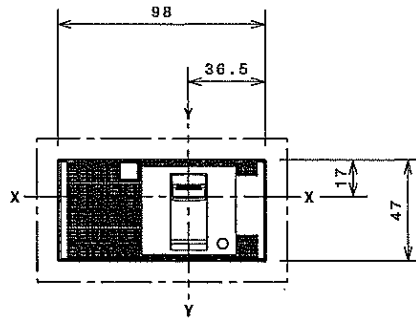


A=71
4 POLES



A=79
3-4 POLES


1SDC21002P001

With optional flange

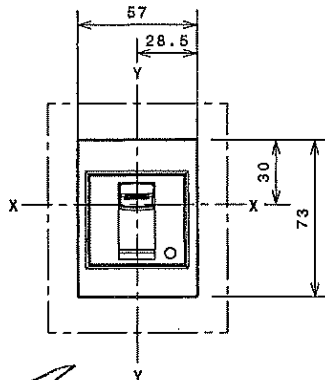

A=79
3-4 POLES

1SDC21002P001

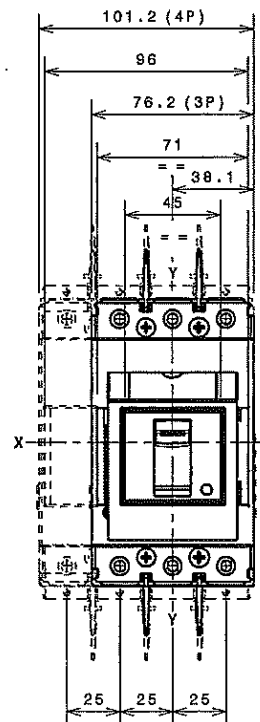

1SDC21002P001

[Handwritten signature]

[Handwritten signature]


Overall dimensions

Tmax XT1 - Terminals for fixed circuit-breaker

Terminals F

Caption


- ① Front terminals for busbars connection
- ⑦ 25mm insulating barriers between phases (compulsory) provided

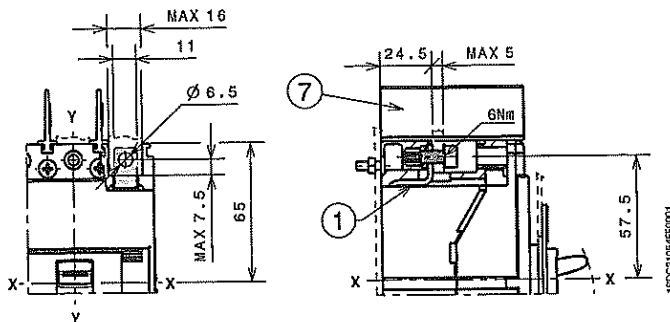

Terminals EF

Caption


- ② Front extended terminals
- ③ High terminal covers with degree of protection IP40 (optional) not provided
- ⑤ 100mm insulating barriers between phases (compulsory) provided
- ⑨ Internal insulating plate compulsory with phase barriers (customer attention)

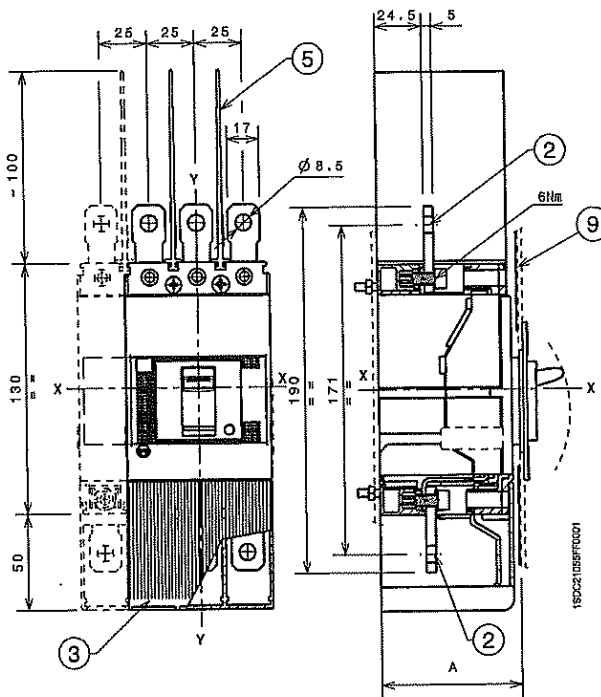

Terminals ES

Caption

- ④ Front extended spread terminals for busbar connection
- ⑥ 200mm insulating barriers between phases (compulsory) provided

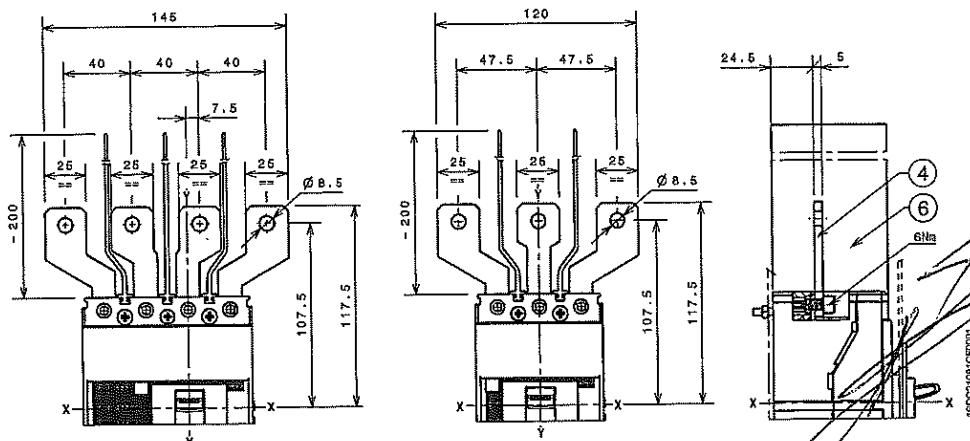



Overall dimensions

Tmax XT1 - Terminals for fixed circuit-breaker

1x1.5...50mm² terminals FCCuAl

Caption

- ① 1x1.5...50mm² front terminal FCCuAl
- ③ 25mm insulating barriers between phases (compulsory) provided

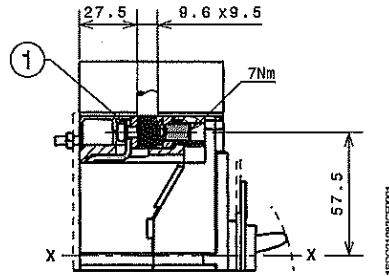



1SDC21082CF001

1x35...95mm² terminals FCCuAl

Caption

- ① External terminal FCCuAl
- ② High terminal covers with degree of protection IP40 (optional) provided

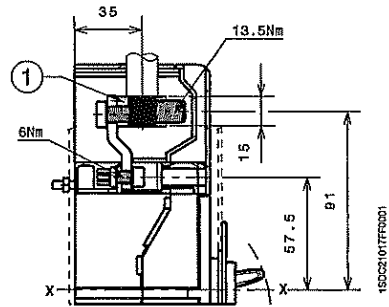



1SDC21017FF001

Terminals FCCu

Caption

- ② Front terminal FCCu

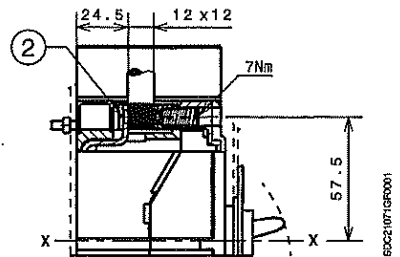



1SDC21071GP001

Terminals MC

Caption

- ④ Terminal covers with degree of protection IP40 (compulsory) provided
- ⑤ Front terminal for multicable connection

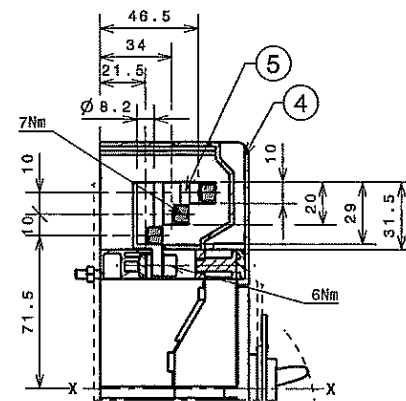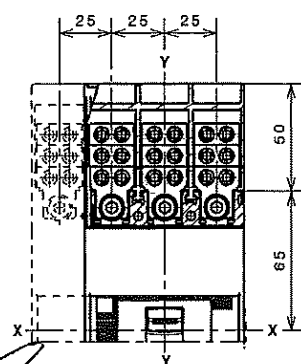

1SDC21084CF001



гр.Петрич 2850, Промислена зона
ул. "Свобода" 49
тел.: 08359 745 60743; факс: 08359 745 60742
e-mail: metox@memuks.bg
гр.София 1000 ул. "Ринкадо Вакарни" бл. 5
тел.: 08359 2 869 0696; факс: 08359 2 958 9334
e-mail: sales@memuks.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.3

ЕО декларация за съответствие

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД

DICHIARAZIONE DI CONFORMITA'

DECLARATION OF CONFORMITY

No CEITMAX 037 R1.10



Il sottoscritto, rappresentante il seguente costruttore
The undersigned, representing the following manufacturer

costruttore: <i>manufacturer:</i>	ABB SPA – ABB SACE DIVISION
indirizzo: <i>address:</i>	via Baioni 35 I 24123 Bergamo

dichiara qui di seguito che il prodotto:
herewith declares that the product

Identificazione del prodotto: <i>product identification:</i>	TMAX XT1B 160 – XT1C 160 – XT1N 160 – XT1S 160 – XT1H 160 e relativi accessori and relevant accessories
--	--

risulta in conformità a quanto previsto dalla(e) seguente(i) direttiva(e) comunitaria(e)
is in conformity with the provisions of the following EC directive(s)

riferimento n.ro <i>reference nr.</i>	titolo <i>title</i>
2006/95	Direttiva Bassa Tensione <i>Low voltage directive</i>
2004/108/CE	Direttiva Compatibilità Elettromagnetica <i>Electromagnetic Compatibility Directive</i>

e che sono state applicate tutte le norme e/o specifiche tecniche indicate sul retro.
and that the standards and/or technical specifications referenced overleaf have been applied
Ultime due cifre dell'anno in cui è stata affissa la marcatura CE: 09
Last two digits of the years in which the CE marking was affixed


Bergamo il 31.05.10

на основании чл. 36а, ал. 3 от ЗОП

(firma)

(signature) Lucio Azzola R&D Manager – Low Voltage Breakers

(nome e funzione della persona incaricata di firmare per conto del costruttore o suo rappresentante)
(name and function of the signatory empowered to bind the manufacturer or his authorized representative)



DICHIARAZIONE DI CONFORMITA'
DECLARATION OF CONFORMITY

No CEITMAX 037 R1.10

Riferimento relativo alle norme e/o specifiche tecniche, o parti di esse, utilizzate per la presente dichiarazione di conformità:

References of standards and/or technical specifications applied for this declaration of conformity, or parts thereof:

- norme armonizzate:
- harmonized standards:

n.ro nr	edizione Issue	titolo title	parti parts
EN 60947	2007	Low voltage switchgear and controlgear	Part 1: General rules
EN 60947	2006	Low voltage switchgear and controlgear	Part 2: Circuit Breakers

- altre norme e/o specifiche tecniche:
- other standards and/or technical specifications

n.ro nr	edizione Issue	titolo title	parti parts
IEC 60947	Ed.5.0	Low voltage switchgear and controlgear	Part 1: General rules
IEC 60947	Ed.4	Low voltage switchgear and controlgear	Part 2: Circuit Breakers

DICHIARAZIONE DI CONFORMITA'

DECLARATION OF CONFORMITY

No CEITMAX 037 R1.10



- altre soluzioni tecniche, i cui dettagli sono inclusi nella documentazione tecnica o fascicolo tecnico:
- other technical solutions, the details of which are included in the technical documentation or the technical construction file:

catalogo tecnico 1SDC210033D0201 03/2010

technical catalogue 1SDC210033D0201 March 2010

Certificato di gestione della Qualità ISO 9001-2000

ISO 9001 Quality Management System Certificate

Certificato di gestione Ambientale ISO 14001

ISO14001 Environment Management System Certificate

- altri riferimenti o informazioni richiesti dalla(e) direttiva(e) comunitaria(e) applicabile(i):
 - other references or information required by the applicable EC directive(s):
-



ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПАКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОАПАРАТУРА-ИН и СрН

гр.Петрич 2850, Промислена зона
ул."Свобода"49
тел.:00359 745 60743; факс:00359 745 60742
e-mail: metix@metix.bg
гр.София 1000 ул."Рихардо Вакарини"бл.5
тел.:00359 2 869 0696; факс:00359 2 959 6334
e-mail:sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.4



Протоколи от типови изпитвания на английски или български език, проведени от независима изпитвателна лаборатория – заверени копия, с приложен списък на отделните изпитвания на български език

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /ИН/ "

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД



Handwritten signature

**TYPE APPROVAL CERTIFICATE
N. ELE389411CS**

This is to certify that the product below is found to be in compliance with the applicable requirements of the RINA type approval system.

Description	Circuit breaker
Type	Tmax XT Series: XT1, XT2, XT3, XT4
Applicant	ABB SpA – ABB Sace Division Via Baloni, 35 24123 Bergamo Italy
Manufacturer	ABB SpA – ABB Sace Division Via Enrico Fermi, 14 03100 Frosinone Italy
Testing Standards	IEC 60947-2 RINA Rules for Classification of Ships Part C_ Machinery System and Fire protection Ch.3, Sect.6. Table1

Issued in Genova on May 24, 2012.

This certificate is valid until May 23, 2022

на основание чл. 36а, ал. 3 от ЗОП

RINA

Valerio Donanni


Handwritten signature

Genova, May 24, 2012

RINA
Via Cassica, 12 06128 Genova

Handwritten signature

Handwritten signature



[Handwritten signature]

TYPE APPROVAL CERTIFICATE N. ELE389411CS

Tmax XT

Product Description

• **Circuit Breaker type Tmax XT1**

Version	XT1B			XT1C			XT1N			XT1S			XT1H		
Rated current In [A]	160			160			160			160			160		
Release type	TMD R50+R160														
Voltage [V]	240	440	690	240	440	690	240	440	690	240	440	690	240	440	690
Icu [kA]	25	15	3	40	25	4	65	36	6	85	50	8	100	65	10
Ics [kA]	25	12	3	40	13	4	50	18	4	64	25	4	75	33	5
Icm [kA]	52.5	30	4.5	84	52.5	6	143	75.6	9	187	105	13.6	220	143	17
Frequency [Hz]	50-60			50-60			50-60			50-60			50-60		
T amb [°C]	40			40			40			40			40		

• **Circuit Breaker type Tmax XT2**

Version	XT2N			XT2S			XT2H			XT2L			XT2V		
Rated current In [A]	160			160			160			160			160		
Release type	TMA, TMD, MF, MA Ekip LS/I, Ekip I, Ekip LSI, Ekip LSIg, Ekip G LS/I, Ekip N LS/I, Ekip M-LIU R20+R160														
Voltage [V]	240	440	690	240	440	690	240	440	690	240	440	690	240	440	690
Icu [kA]	65	36	10	85	50	12	100	65	15	150	100	18	200	150	20
Ics [kA]	65	36	10	85	50	12	100	65	15	150	100	18	200	150	20
Icm [kA]	143	75.6	17	187	105	24	220	143	30	330	220	36	440	330	40
Frequency [Hz]	50-60			50-60			50-60			50-60			50-60		
T amb [°C]	40			40			40			40			40		


• **Circuit Breaker type Tmax XT3**

Version	XT3N			XT3S		
Rated current In [A]	250			250		
Release type	TMD, MA R63+R250					
Voltage [V]	240	440	690	240	690	690
Icu [kA]	50	25	5	85	40	8
Ics [kA]	38	19	20	20	20	20
Icm [kA]	105	52.5	8.5	187	84	13.5
Frequency [Hz]	50-60			50-60		
T amb [°C]	40			40		

Genova, May 24, 2012


RINA
Via Corsica, 12 - 16128 Genova

[Handwritten signature]

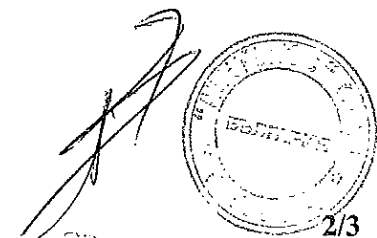

2/3

[Handwritten signature]



[Handwritten signature]

TYPE APPROVAL CERTIFICATE N. ELE389411CS

Tmax XT

• **Circuit Breaker type Tmax XT4**

Version	XT4N			XT4S			XT4H			XT4L			XT4V		
Rated current In [A]	160/250			160/250			160/250			160/250			160/250		
Release type	TMA, TMD, MA Ekip LS/I, Ekip I, Ekip LSI, Ekip LSI/G, Ekip G LS/I, Ekip N LS/I, Ekip M-LIU R25+R250														
Voltage [V]	240	440	690	240	440	690	240	440	690	240	440	690	240	440	690
Icu [kA]	65	36	10	85	50	12	100	65	15	150	100	20	200	150	25
Ics [kA]	65	36	10	85	50	12	100	65	15	150	100	20	200	150	20
Icm [kA]	143	75.6	17	187	105	24	220	143	30	330	220	40	440	330	52.5
Frequency [Hz]	50-60			50-60			50-60			50-60			50-60		
T amb [°C]	40			40			40			40			40		

For T ambient = 45°C, thermal – magnetic release must be derated in accordance with following table:

XT1			XT2			XT3			XT4		
In [A]	MIN [A]	MAX [A]	In [A]	MIN [A]	MAX [A]	In [A]	MIN [A]	MAX [A]	In [A]	MIN [A]	MAX [A]
50	33,9	48,4	20	13,5	19,3	63	43	61	25	22	24
63	42,7	61	25	16,8	24,0	80	54	77	32	22	24
80	54,2	77	32	21,6	30,8	100	68	97	40	27	39
100	67,8	97	40	27,0	38,5	125	85	121	50	34	48
125	84,7	121	50	33,7	48,2	160	108	155	63	43	61
160	108,4	155	63	42,5	60,7	200	136	194	80	54	77
			80	54,0	77,1	250	169	242	100	68	97
			100	67,5	96,4				125	85	121
			125	84,3	120,5				160	108	155
			160	107,9	154,2				200	136	194
									225	152	194
									250	169	242

Reference document:

SACE Tmax XT Technical catalogue; doc. n. 1SDC210033D0202

Notes:

- Rated service short circuit breaking capacity (Ics)
- Rated ultimate short circuit breaking capacity (Icu)
- Rated short circuit making capacity (Icm)


Genova, May 24, 2012 *[Handwritten signature]*

RINA
Via Corsica, 12 · 16128 Genova

[Handwritten signature]

3/3

[Handwritten signature]



Certificate No:
E-14114
File No:
823.10
Job Id:
262.1-010828-2



TYPE APPROVAL CERTIFICATE

This is to certify:
That the Circuit Breaker

with type designation(s)
Tmax XT1, XT2, XT3 and XT4

Issued to
ABB S.P.A. - ABB Sace Division
Bergamo, Italy

is found to comply with
Det Norske Veritas' Rules for Classification of Ships, High Speed & Light Craft and Det Norske Veritas' Offshore Standards

Application :

Rated Voltage (V) 690
Rated Current (A) 160 - 250
Frequency (Hz) 50-60

This Certificate is valid until 2022-06-30

Issued at Hovik on 2015-03-31

DNV GL local station: Milan


Approval Engineer: Nicolay Horn

for DNV GL




Digitally Signed by Laumann, Marit
Location: DNV GL, Hovik, Norway
Signing Date: 2015-04-27

Marit Laumann
Head of Section

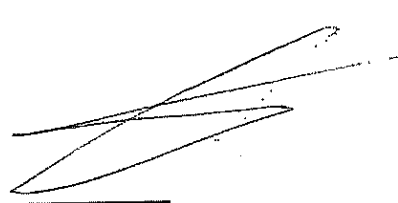

This Certificate is subject to terms and conditions covered. Any significant change in design or construction may render this Certificate invalid. The validity date relates to the Type Approval Certificate and not to the approval of equipment/systems installed.



Certificate No: **E-14114**
 File No: **823.10**
 Job Id: **262.1-010828-2**

Name and place of manufacturer


ABB SpA – ABB Sace Division
 Frosinone, ITALY

Product description

Moulded –case circuit breaker

	XT1				
	B	C	N	S	H
Rated insulation voltage Ui (V)	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp (kV)	8	8	8	8	8
Rated current Iu (A) at 40 °C (See application/limitation)	160	160	160	160	160
Rated service voltage Ue (V)	690 AC	690 AC	690 AC	690 AC	690 AC
Rated frequency AC (Hz)	50-60	50-60	50-60	50-60	50-60
Rated ultimate short-circuit breaking capacity (kA) Icu					
230 V AC (kA)	25	40	65	85	100
440 V AC (kA)	15	25	36	50	65
690 V AC (kA)	3	4	6	8	10
Rated service short-circuit breaking capacity Ics (%Icu)					
230 V AC (kA)	100 %	100 %	75 (50) %	75 %	75 %
440 V AC (kA)	75 %	50 %	50 %	50 %	50 %
690 V AC (kA)	100 %	100 %	75 %	50 %	50 %
Utilisation category	A	A	A	A	A
Rated short-circuit making capacity Icm					
230 V AC (kA)	52.5	84	143	187	220
440 V AC (kA)	30	52.5	75.6	105	143
690 V AC (kA)	4.5	6	9	13.6	17

	XT2				
	N	S	H	L	V
Rated insulation voltage Ui (V)	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp (kV)	8	8	8	8	8
Rated current Iu (A) at 40 °C (See application/limitation)	160	160	160	160	160
Rated service voltage Ue (V)	690 AC	690 AC	690 AC	690 AC	690 AC
Rated frequency AC (Hz)	50-60	50-60	50-60	50-60	50-60
Rated ultimate short-circuit breaking capacity (kA) Icu					
230 V AC (kA)	65	85	100	150	200
440 V AC (kA)	36	50	65	100	150
480 V AC (kA)*	NA	NA	NA	NA	75*
690 V AC (kA)	10	12	15	18	20
Rated service short-circuit breaking capacity Ics (%Icu)					
230 V AC (kA)	100 %	100 %	100 %	100 %	100 %
440 V AC (kA)	100 %	100 %	100 %	100 %	100 %
690 V AC (kA)	100 %	100 %	100 %	100 %	75 %
Utilisation category	A	A	A	A	A
Rated short-circuit making capacity Icm					
230 V AC (kA)	143	187	220	330	440
440 V AC (kA)	75.6	105	143	220	440
480 V AC (kA)	NA	NA	NA	NA	165
690 V AC (kA)	17	24	30	36	40



Certificate No: **E-14114**
 File No: **823.10**
 Job Id: **262.1-010828-2**

	XT3	
	N	S
Rated insulation voltage Ui (V)	1000	1000
Rated impulse withstand voltage Uimp (kV)	8	8
Rated current Iu (A) at 40 °C (See application/limitation)	250	250
Rated service voltage Ue (V)	690 AC	690 AC
Rated frequency AC (Hz)	50-60	50-60
Rated ultimate short-circuit breaking capacity (kA) Icu		
230 V AC (kA)	50	85
440 V AC (kA)	25	40
690 V AC (kA)	5	8
Rated service short-circuit breaking capacity Ics (%Icu)		
230 V AC (kA)	75 %	50 %
440 V AC (kA)	75 %	50 %
690 V AC (kA)	75 %	50 %
Utilisation category	A	A
Rated short-circuit making capacity Icm		
230 V AC (kA)	105	187
440 V AC (kA)	52.5	84
690 V AC (kA)	8.5	13.6

	XT4				
	N	S	H	L	V
Rated insulation voltage Ui (V)	1000	1000	1000	1000	1000
Rated impulse withstand voltage Uimp (kV)	8	8	8	8	8
Rated current Iu (A) at 40 °C (See application/limitation)	160/250	160/250	160/250	160/250	160/250
Rated service voltage Ue (V)	690 AC	690 AC	690 AC	690 AC	690 AC
Rated frequency AC (Hz)	50-60	50-60	50-60	50-60	50-60
Rated ultimate short-circuit breaking capacity (kA) Icu					
230 V AC (kA)	65	85	100	150	200
440 V AC (kA)	36	50	65	100	150
690 V AC (kA)	10	12	15	20	25
Rated service short-circuit breaking capacity Ics (%Icu)					
230 V AC (kA)	100 %	100 %	100 %	100 %	100 %
440 V AC (kA)	100 %	100 %	100 %	100 %	100 %
690 V AC (kA)	100 %	100 %	100 %	100 %	75 %
Utilisation category	A	A	A	A	A
Rated short-circuit making capacity Icm					
230 V AC (kA)	143	187	220	330	440
440 V AC (kA)	75.6	105	143	220	330
690 V AC (kA)	17	24	30	40	52.5

* See application limitation

Application/Limitation

TXT1 and TX3 only equipped with thermal-magnetic release, TXT2 and TXT4 is equipped with both Electronic and thermal-magnetic release.

The breaker type XT2V for 480 V is only applicable for use when the Ics value is not relevant.

Certificate No: **E-14114**
File No: **823.10**
Job Id: **262.1-010828-2**

Release data is given for 40 °C. For ship application thermal magnetic releases to be derated in accordance with following table (electronic releases need no deration):

XT1		XT2		XT3		XT4	
40 °C	45 °C	40 °C	45 °C	40 °C	45 °C	40 °C	45 °C
In	In	In	In	In max	In max	In	In max
160	154	160	154	160	154	160	154
-	-	-	-	250	240	250	240

Type Approval documentation

Technical Info :
" SACE Tmax XT New low voltage moulded-case circuit-breakers up to 250A."

Type tests:
CD "TEST REPORTS ABB SACE Tmax XT – DNV APPROVAL"
ABB Test Report LBRP 11955/03 rev 01. Issued 2013-02-02

Tests carried out

Type tests according to IEC 60947-2 sequence I, II, III and Annex H. Vibration & shock, inclination, EMC, dry heat, damp heat and low temperature test. UL 489 (ed.11, 2009) for breaker type XT2V for 480V /icu.

Marking of product

ABB SACE – Type designation – Electrical data

Periodical assessment

The scope of the periodical assessment is to verify that the conditions stipulated for the Type approval is complied with and that no alterations are made to the product design or choice of materials.

The main elements of the survey are:

- Inspection on factory samples, selected at random from the production line (where practicable)
- Results from Production Sample Tests (PST) and Routines (RT) checked (if not available tests according to PST and RT to be carried out)
- Review of type approval documentation
- Review of possible change in design, materials and performance
- Ensuring traceability between manufacturer's product type marking and Type Approval Certificate.

Survey to be performed at least every second year.

END OF CERTIFICATE

DNV GL logo and a circular stamp with the text "DNV GL" and "SACE" inside. There is also a handwritten signature to the right of the stamp.

IEC**IECEE
CB
SCHEME**

Ref. Certif. No.

SE-72324A1/M1**IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST
CERTIFICATES FOR ELECTRICAL EQUIPMENT
(IECEE) CB SCHEME****SYSTEME CEI D'ACCEPTATION MUTUELLE DE
CERTIFICATS D'ESSAIS DES EQUIPEMENTS
ELECTRIQUES (IECEE) METHODE OC****CB TEST CERTIFICATE****CERTIFICAT D'ESSAI OC**Product
Produit

Circuit breakers

Name and address of the applicant
Nom et adresse du demandeurABB S.p.A.
ABB Sace Division, Via Pescaria 5, IT-24123 Bergamo.
ITALYName and address of the manufacturer
Nom et adresse du fabricant

Same as applicant

Name and address of the factory
Nom et adresse de l'usine
Note: When more than one factory, please report on page 2
Note: Lorsque il y plus d'une usine, veuillez utiliser la 2^{ème} pageABB S.p.A.
ABB Sace Division, Via Enrico Fermi 14, 03100 Frosinone, ITALYRatings and principal characteristics
Valeurs nominales et caractéristiques principalesU_e = 690VAC, I_b = 16-160A, 50-60Hz,
U_i = 800V, U_{imp} = 8kV, Pattern no. 3 and 4.
See also page 2 and 3.Trademark (if any)
Marque de fabrique (si elle existe)

ABB

Type of Manufacturer's Testing Laboratories used
Type de programme du laboratoire d'essais
constructeur

CTF Stage 3

Model / Type Ref.
Ref. De typeTmax XT1B 160, Tmax XT1C 160, Tmax XT1N 160,
Tmax XT1S 160, Tmax XT1H 160Additional information (if necessary may also be
reported on page 2)
Les informations complémentaires (si nécessaire,
peuvent être indiqués sur la 2^{ème} page)This certificate replaces certificate SE-72324A1 dated 18 July
2013, a new certificate have been issued due additional
current ratings.A sample of the product was tested and found
to be in conformity with
Un échantillon de ce produit a été essayé et a été
considéré conforme à la

IEC 60947-2:2006+A1+A2

As shown in the Test Report Ref. No. which forms part
of this Certificate
Comme indiqué dans le Rapport d'essais numéro de
référence qui constitue partie de ce Certificat

1212698 and 1510090STO-001

This CB Test Certificate is issued by the National Certification Body
Ce Certificat d'essai OC est établi par l'Organisme National de CertificationIntertek Semko AB
Box 1103
SE-164 22 Kista, Sweden
Int +46 8 750 00 00**Intertek**

На основании чл. 36а, ал. 3 от ЗОП

Signature:

Bo Berglöf

Date: 13 May 2015

Mandated reviewer: RRL

1/3

RRL

Additional information (if necessary)
Information complémentaire (si nécessaire)

Tmax XT1B 160

U _e (V)	I _{cu} (kA)	I _{cs} (% of I _{cu})	I _{IT} (kA)
220/230 AC	25	100	1,92
380 AC	18	100	1,92
400/415 AC	18	100	1,92
440 AC	15	75	1,92
500 AC	8	100	1,92
525 AC	6	100	1,92
690 AC	3	100	1,92
250 DC*	18	100	-
500 DC**	18	100	-

* = 2P in series

** = 3P in series

Tmax XT1C 160

U _e (V)	I _{cu} (kA)	I _{cs} (% of I _{cu})	I _{IT} (kA)
220/230 AC	40	100	1,92
380 AC	25	100	1,92
400/415 AC	25	100	1,92
440 AC	25	50	1,92
500 AC	18	50	1,92
525 AC	8	100	1,92
690 AC	4	100	1,92
250 DC*	25	100	-
500 DC**	25	100	-

* = 2P in series

** = 3P in series

Tmax XT1N 160

U _e (V)	I _{cu} (kA)	I _{cs} (% of I _{cu})	I _{IT} (kA)
220/230 AC	65	75 (50kA)	1,92
380 AC	36	100	1,92
400/415 AC	36	100	1,92
440 AC	36	50	1,92
500 AC	30	50	1,92
525 AC	22	50	1,92
690 AC	6	75	1,92
250 DC*	36	100	-
500 DC**	36	100	-

* = 2P in series

** = 3P in series

Date: 13 May 2015

Signature:

на основании чл. 36а, ал. 3 от ЗОП

Additional information (if necessary)
Information complémentaire (si nécessaire)

Tmax XT1S 160

U_e (V)	I_{cu} (kA)	I_{cs} (% of I_{cu})	I_{IT} (kA)
220/230 AC	85	75	1,92
380 AC	50	100	1,92
400/415 AC	50	75	1,92
440 AC	50	50	1,92
500 AC	36	50	1,92
525 AC	35	50	1,92
690 AC	8	50	1,92
250 DC*	50	100	-
500 DC**	50	100	-

* = 2P in series

** = 3P in series

Tmax XT1H 160

U_e (V)	I_{cu} (kA)	I_{cs} (% of I_{cu})	I_{IT} (kA)
220/230 AC	100	75	1,92
380 AC	70	75	1,92
400/415 AC	70	50 (37,5kA)	1,92
440 AC	65	50	1,92
500 AC	50	50	1,92
525 AC	35	50	1,92
690 AC	10	50	1,92
250 DC*	70	75	-
500 DC**	70	75	-

* = 2P in series

** = 3P in series

Date: 13 May 2015

Signature:

на основании чл. 36а, ал. 3 от ЗОП



ЕЛЕКТРИЧЕСКИ ТАБЛА, КОМПАКТНИ ТРАНСФОРМАТОРНИ ПОСТОВЕ, ЕЛЕКТРОВАПАРАТУРА-НИ И СЪН

гр.Петрич 2850, Промислена зона
ул. "Свобода" 49
тел.: 00359 745 60743; факс: 00359 745 60742
e-mail: metix@metix.bg
гр.София 1100 ул. "Рикордо Вазарини" бл.5
тел.: 00359 2 669 0696; факс: 00359 2 958 9334
e-mail: sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.5


Сертификат/акредитация на независимата изпитвателна лаборатория, провела типовите изпитвания по т. 4 – заверено копие

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД



ASI-ACC-048

Certificate of Accreditation

certification against voluntary sustainability standards

ASI - Accreditation Services International GmbH hereby affirms that


Rina Services S.p.A.

Via Corsica, 12
Genova 16128 Italy

meets the ASI accreditation program requirements and those set forth in the accreditation standards listed in the annex to this certificate, for the following programs:

- Forest Stewardship Council® (FSC®)
- Marine Stewardship Council (MSC)

Accreditation Code ASI-ACC-048



ASI - Accreditation Services International GmbH
Friedrich-Ebert-Allee 69
53113 Bonn, Germany

На основание чл.
36а, ал. 3 от
ЗОП

Digitally signed by
GUNTARS LAGUNS
Date: 10/08/2017

ASI Managing Director

Please see the scope and validity
of accreditation in the certificate
annex on the ASI website:
www.accreditation-services.com



ASI Certificate of Accreditation - Annex

CAB Name Rina Services S.p.A.
CAB Shortcode RINA
Accreditation Code ASI-ACC-048
Accredited Activities Certification against voluntary sustainability standards - as indicated below
Last updated on 02 October 2017


Forest Stewardship Council® (FSC®) Accreditation

Date of original accreditation	24 September 2012
Current accreditation granted on	29 September 2017
Current accreditation valid until	24 September 2022
Technical Scope(s)	FSC COC
Geographical Scope(s)	Worldwide (excluding China).
Standard(s) to which CAB is accredited:	FSC-STD-20-001 v4-0 FSC-STD-20-011 V2-0 FSC-STD-40-003 V2-1
Standard(s) which CAB can certify against:	FSC-STD-40-004 V3-0 FSC-STD-40-005 V2-1 FSC-STD-40-006 V1-0 FSC-STD-40-007 V2-0

Rina Services S.p.A.
Accreditation Code ASI-ACC-048



Page 2 of 3
ASI Certificate of Accreditation - Annex

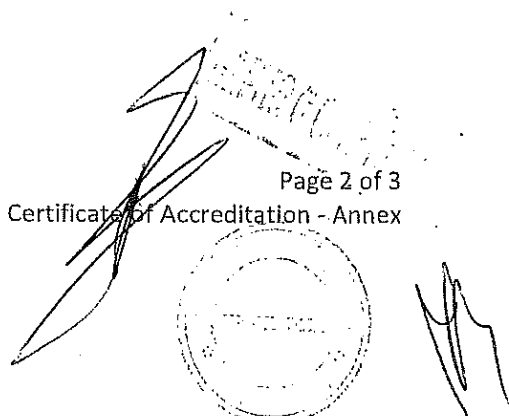

Marine Stewardship Council (MSC) Accreditation	
Date of original accreditation	26 September 2013
Current accreditation granted on	26 September 2013
Current accreditation valid until	25 September 2018
Technical Scope(s)	MSC COC
Geographical Scope(s)	Worldwide
Standard(s) to which CAB is accredited:	MSC General Certification Requirements v2.1 MSC Chain of Custody Certification Requirements v2.0
Standard(s) which CAB can certify against:	MSC Chain of Custody Standard – Default v4.0 MSC Chain of Custody Standard – Group v1.0 MSC Chain of Custody Standard – Consumer-Facing Organisation v1.0

Rina Services S.p.A.
Accreditation Code ASI-ACC-048

Page 3 of 3
ASI Certificate of Accreditation - Annex



гр.Петрич 2850. Прва ишла зона
ул. "Свобода" 49
тел.: 00359 745 60743; факс: 00359 745 60742
e-mail: metix@metix.bg
гр.София 1009 ул. "Рикардо Вакарини" бл.5
тел.: 00359 2 869 0686; факс: 00359 2 958 9334
e-mail: sales@metix.bg



Management
System
ISO 9001:2015
ISO 14001:2015
OHSAS 18001:2007

www.tuv.com
ID 9105026855

ПРИЛОЖЕНИЕ 9.18.6

Инструкции за транспортиране, складиране, монтиране, вкл. въртящия момент на затягане на клемовите съединения, обслужване и поддържане

Автоматичните прекъсвачи НН с лят корпус трябва да се транспортират опаковани в оригинална опаковка.

Автоматичните прекъсвачи НН с лят корпус трябва да се съхраняват в сухи, закрити помещения опаковани в оригинална опаковка

Автоматичните прекъсвачи НН с лят корпус да бъдат монтирани на монтажна проща сила на затягане 2,5 Nm.

*Настоящото приложение се прилага във връзка с участието ми в:
търг с предмет:*

„ ДОСТАВКА НА РАЗПРЕДЕЛИТЕЛНИ ТАБЛА НИСКО НАПРЕЖЕНИЕ /НН/ “

РЕФ. № PPD 18-073

организиран от "ЧЕЗ Разпределение България" АД