




ARIA

Universal polyester cabinets

*[Handwritten signature]*


Related wall mounting cabinets

Type	ARIA 32	ARIA 43	ARIA 54	ARIA 64
H x W x D	315 x 215 x 170	415 x 315 x 170	515 x 415 x 230	615 x 415 x 230




Cabinet  
IP65 - IK10  
With double bit  
lock 3 mm

Ref. No.	-	-	831809 2-point	831810 2-point
----------	---	---	-------------------	-------------------




Cabinet  
IP66 - IK10  
With central  
double bit lock 3 mm

Ref. No.	831025	831036	831052	831065
----------	--------	--------	--------	--------




Cabinet  
IP66 - IK10  
With central swing  
handle for profile  
half cylinder

Ref. No.	-	831034	831051	831064
----------	---	--------	--------	--------




Glazed door cabinet  
IP65 - IK07  
With double bit  
lock 3 mm

Ref. No.	-	-	831812 2-point	831813 2-point
----------	---	---	-------------------	-------------------



Glazed door cabinet  
IP66 - IK07  
With central  
double bit lock 3 mm

Ref. No.	-	831815	831129	831130
----------	---	--------	--------	--------



Glazed door cabinet  
IP66 - IK07  
With central swing  
handle for profile half  
cylinder

Ref. No.	-	-	831284	831285
----------	---	---	--------	--------


Pack: 1

*[Large handwritten signature]*



*[Handwritten signature]*

6/1/2019



Applications

- Industry
- Steel works
- Oil refineries
- Breweries
- Shipyards
- Public utilities
- Photovoltaic energy
- Heavy industry



ARIA 75

735 x 535 x 270



ARIA 86

835 x 635 x 300



ARIA 108

1035 x 835 x 300

831811  
2-point

831081

831098

831112

831080

831097

831111

831814  
2-point

831131




831132

831133

831286

831287

831288

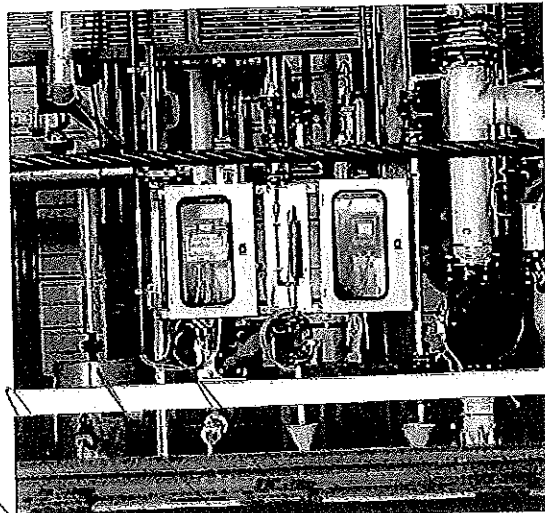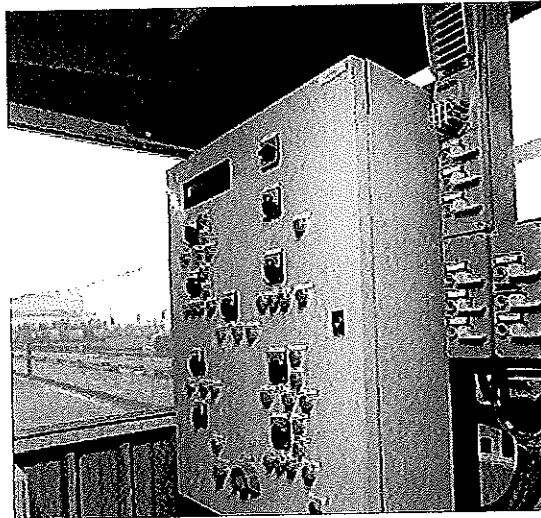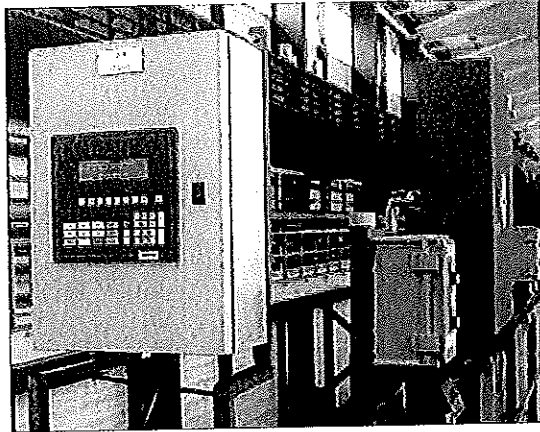

Universal cabinets

Intro

A

B

C

D

E

F

G

H

I

X



Universal polyester cabinets - Accessories

Isolated wall mounting cabinets

Type	ARIA 32	ARIA 43	ARIA 54	ARIA 64
H x W x D	315 x 215 x 170	415 x 315 x 170	515 x 415 x 230	615 x 415 x 230
<b>Mounting plates</b>				
H x W	250 x 150	350 x 250	450 x 350	550 x 350
Perlinox 5 mm	Ref. No. 831027	831038	831054	831067
Sendzimir zinc coated sheet steel 2 mm	Ref. No. 831026	831037	831053	831066
Metal perforated 1.5 mm	Ref. No. 831332	831333	831334	831335
<b>Mounting frame</b>	Ref. No. 831030	831041	831057	831070
Banks	2	2	3	3
Modules	12	24	54	54
<b>Rail for terminal blocks</b>	Ref. No. 831018	831019	831020	831020
Available spaces for terminal	2	3	4	4
<b>Full cover plates</b>				
Plain	Ref. No. 831028	831039	831055	831068
With cut-outs for DIN-rail equipment	Ref. No. 831029	831040	831056	831069
With cut-out for individual modular cover plates	Ref. No. -	831790	831791	831792
Number of ind. mod. cover plates containable	-	2	3	3
<b>Individual modular cover plates IP20 (PVC)</b>	H x W	150 x 239	150 x 343	150 x 343
Plain	Ref. No. -	831797	831799	831801
With cut-out for DIN-rail equipment	Ref. No. -	831796	831798	831800
Modules	-	12	17	18

A

B

C

D

E

F

G

H

I

X

Pack: 1



63/139

ARIA



ARIA 75

735 x 535 x 270

650 x 450

831083  
831082

831336



ARIA 86

835 x 635 x 300

750 x 550

831100  
831099

831337



ARIA 108

1035 x 835 x 300

950 x 750

831114  
831113

831338

831086

4  
88

831103

4  
96

831117

5  
180

831021

6

831022

7

831023

10

831084

831085

831793

4

150 x 423

831803

831802

22

831101

831102

831794

8

150 x 239

831797

831796

12

831115

831116

831795

10

150 x 343

831801

831800

18

Universal cabinets

Intro

A

B

C

D

E

F

G

H

I

X



B.13

64/139



Common accessories



**Lock Inserts**  
To replace double-bit inserts from standard delivery

	831008	1
	831005	1
	831006	1
	831007	1

Other locks on request.


**Fixing lugs**

	831000	1
Set of 4 fixing lugs. 304 stainless steel.		
	831001	1
Set of 4 fixing lugs in polyamide		



**Hinge supports for Inner door**

	831010	1
Set of 2 hinge supports for cover plate. Together with a closed cover plate on inner door can be re-used.		




**Handles**

	831003	1
Neutral handle		
	831004	1
Handle with lock and 2 keys V2432E		
	831180	1
Handle with lock and 2 keys 1242E		
	831152	1
Handle with lock and 2 keys 405E		
	831153	1
Handle with lock and 2 keys 455E		

**Profile half cylinder locks**


Standard: D = 40 mm - L = 30,5 mm

	832030	1
With 2 keys V2432-E		
	832741	2
Spare keys for 832030		
	832031	1
With 2 keys 1242-E		
	832465	1
With 2 keys 455-E		



	831821	1
Handle for profile half cylinder, 40 mm (As spare part or replacement for ARIA 54 and larger - in case of new replacing double-bit lock a mechanical operation at the door is necessary)		

	832466	1
With 2 keys 405-E		
	843435	1
With 1 square key, 6 mm		




	843000	1
Handle for profile half cylinder, 45 mm (As spare part or replacement for ARIA 54 and larger - in case of new replacing double-bit lock a mechanical operation at the door is necessary)		

	832032	1
With 1 square key, 8 mm		
	832033	1
With 1 triangular key, 8 mm		

	831822	1
Handle for profile half cylinder for padlocking		

	832034	1
With 1 triangular key, 11 mm		
	832029	1
With 1 double-bit key, 3 mm		



**Ventilation grids**

(IP44 when mounted in the double corner on ARIA)

	831009	1
Set of two ventilation grids Drilling Ø 34,9 mm		




Please refer to chapter G for more ventilation options.






**Common accessories (continued)**


<b>Supporting chair</b>	891854	1
For ARIA 75 and 86, for temporary connections		




<b>Blanking plate</b>	610142	4
For 4 modules		
	610484	500
For 4 modules		




<b>Marking strip</b>	851321	1m
Self adhesive		




<b>Pole mounting set</b>	891608	1
For ARIA 54/64		
Stainless steel fixing lugs are included.		
Pole mounting with steel bond (not included)		



<b>Document pocket</b>	811516	1
DIN A4 - W x H = 325 x 180 mm		
	832000	1
DIN A5 - W x H = 155 x 225 mm		



<b>Branch terminals</b>	610185	4
6 x 10 mm <sup>2</sup> + 2 x 16 mm <sup>2</sup>		
to clip on 12 x 2 mm bar		
<b>Phase bar - black</b>	610186	4
Earth bar - green		
	610187	4
Neutral bar - blue		



<b>Nuts</b>	831328	50
For perforated mounting plates		
M4	831329	50
M5	831330	50
M6		



Universal cabinets

infra

A

B

C

D

E

F

G

H

I

X

B.15

*Handwritten signature*

GE/139



*Handwritten signature*

## FUSE SWITCH-DISCONNECTORS OPVP10 UP TO 32 A

- Fuse switch-disconnectors OPVP10 are intended for cylindrical fuse-links size 10x38.
- They can safely switch off rated current and overcurrent. Devices meet the requirements for safe disconnection.
- Inverse connection is permissible and it affects neither the technical parameters nor the safety of the operator.
- Fuse switch-disconnectors OPVP10 can be sealed in the closed state.
- The devices are designed as modular for 45 mm cutout in the switchboard.
- Mounted on „U“ rail of type TH35 according to EN 60715.
- Switch-Disconnector design ...-S features LED signalization of the state of fuse-link for each pole. Fuse-link state can also be indicated by means of MD-M3 electronic signalling.

### Fuse switch-disconnectors


Type	Order code	I <sub>n</sub> [A]	Number of poles	Weight [kg]	Package [pcs]
OPVP10-1	OEZ:41013	32	1	0.063	12
OPVP10-1-S	OEZ:43683		1	0.068	12
OPVP10-1N	OEZ:43686		1+N	0.133	6
OPVP10-2	OEZ:41014		2	0.128	6
OPVP10-2-S	OEZ:43684		2	0.137	6
OPVP10-3	OEZ:41015		3	0.193	4
OPVP10-3-S	OEZ:43685		3	0.193	4
OPVP10-3N	OEZ:43687		3+N	0.271	3

### Accessories

Description	Type	Order code	Weight [kg]	Package [pcs]
1-pole interconnecting busbar, cross-section 10 mm <sup>2</sup> , max. current 63 A rated operating voltage AC 690 V / DC 1 000 V, length 210 mm	S1L-210-10	OEZ:38475	0.047	50
1-pole interconnecting busbar, profile 16 mm <sup>2</sup> , max. current 80 A rated operating voltage AC 690 V / DC 1 000 V, length 1 m	S1L-1000-16	OEZ:37375	0.302	50
2-pole interconnecting busbar, cross-section 10 mm <sup>2</sup> , max. current 63 A rated operating voltage AC 415 V, length 210 mm	S2L-210-10	OEZ:38476	0.110	20
2-pole interconnecting busbar, cross-section 16 mm <sup>2</sup> , max. current 80 A rated operating voltage AC 415 V, length 1 m	S2L-1000-16	OEZ:37378	0.447	20
3-pole interconnecting busbar, cross-section 10 mm <sup>2</sup> , max. current 63 A rated operating voltage AC 415 V, length 210 mm	S3L-210-10	OEZ:38482	0.110	25
3-pole interconnecting busbar, cross-section 16 mm <sup>2</sup> , max. current 80 A rated operating voltage AC 415 V, length 1 m	S3L-1000-16	OEZ:37379	0.737	20
End cap, for single-pole busbars of cross-section 10, 16 mm <sup>2</sup>	EKC-1	OEZ:37383	0.0005	10
End cap, for 2-pole and 3-pole rails 16 mm <sup>2</sup>	EKC-2+3	OEZ:37384	0.001	10
End cap, for 3-pole rails of cross-section 10 mm <sup>2</sup>	EKC-3	OEZ:37385	0.001	10
Terminal extension, with long terminal, cross-section Cu 6 + 50 mm <sup>2</sup>	AL-50-S-L	OEZ:63149	0.033	1
Connection block, enables power supply of interconnecting busbars by conductors of cross-section up to 35 mm <sup>2</sup> , the use of the block extends the mounting with by additional N-poles	ES-35-GS	OEZ:37388	0.03	10
Adapter on „U“ rail TH35, for OPVP10	OD-OPV-AD45	OEZ:43148	0.008	1
Adapter for busbar system with spacing 60 mm, busbar thickness 5 or 10 mm, busbar width 12 + 30 mm, cable outlet bottom, max. current 63 A	GA-60/63/54-1x7,5	OEZ:11883	0.56	1

### Specifications

Rated operating current	I <sub>n</sub>	32 A
Rated operating voltage	U <sub>e</sub>	AC 690 V / DC 440 V
LED signalling voltage range		AC/DC 110 + 690 V
Utilization category	AC 400 V	AC-21B
	AC 690 V	AC-20B
	DC 250 V	DC-21B
Rated thermal current with fuse-link	I <sub>Δ</sub>	32 A
Rated frequency	f <sub>n</sub>	50 + 60 Hz
Rated insulation voltage	U <sub>i</sub>	AC 800 V
Rated conditional short-circuit current with fuse-links PV (RMS)	I <sub>cs</sub>	AC 400 V AC 690 V
Rated impulse withstand voltage	U <sub>imp</sub>	50 kA 100 kA
Fuse-link size	diameter x length	6 kV 10x38
Max. power losses of the fuse-link	P <sub>α</sub>	4.3 W
Rated short-time withstand current	I <sub>cs</sub> 1 s	1.6 kA
Rated short-circuit making capacity at DC 440 V	I <sub>cs</sub>	3.5 kA



# FUSE SWITCH-DISCONNECTORS OPVP10 UP TO 32 A

## Specifications

Electrical endurance	operating cycles	300
Mechanical endurance	operating cycles	2 000
Degree of protection from front side, built-in device, cover closed		IP20
Connection cross-section		Cu / 0.75 ÷ 25 mm <sup>2</sup> 2x (6 ÷ 16) stranded in the same size
Torque		2 ÷ 2.5 Nm
Operating ambient temperature	t	-25 ÷ +55 °C
Max. sea level		2 000 m
Seismic resistance according to VE ŠKODA		3 g / 8 ÷ 50 Hz
Overvoltage category / Rated voltage		I (II*) / AC 690 V, II (III*) / AC 500 V, III / AC 400 V
Standards		IEC 60947-1, -3; EN 60947-1, -3
Approval marks		

\* For underground cable distribution systems with overvoltage protection or for exposure to a low thunderstorm electricity (table H2 EN 60947-1, IEC 60947-1).

EN 60947-3 ed. 2/A2, p. C.5 Instructions for the use of 1-pole controlled devices states: These devices are intended for distribution systems, with possible necessity of switching and/or safe disconnection of individual phases, and must not be used for switching a primary circuit of a three-phase equipment.


### Reduction of rated current of fuse-links PV gG, aM according to the number of poles

Type	I <sub>n</sub> [A]	Reduced rated current [A] (number of poles)					
		1	2	3	5	7	10
OPVP10	32	32	32	32	32	32	32


### Fuse switch-disconnector with disconnecting link

Rated operating current	I <sub>n</sub>	32 A	
Thermal current with disconnecting link ZPV10	I <sub>th</sub>	100 / 25 mm <sup>2</sup>	
Utilization category		AC-20B	
Rated short-time withstand current	I <sub>cs</sub> 1s	1.6 kA	
Rated short-circuit making capacity	I <sub>cm</sub>	AC 690V	3.5 kA
		DC 440V	4 kA
Power losses with disconnecting link at I <sub>n</sub>	P <sub>v</sub>	4.5 W	
Connection cross-section		0.75 ÷ 25 mm <sup>2</sup>	


### Diagram

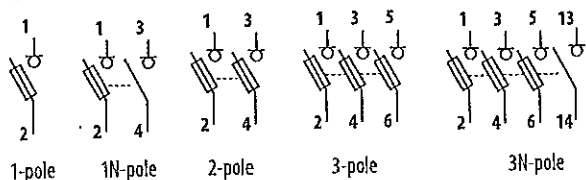

### Dimensions

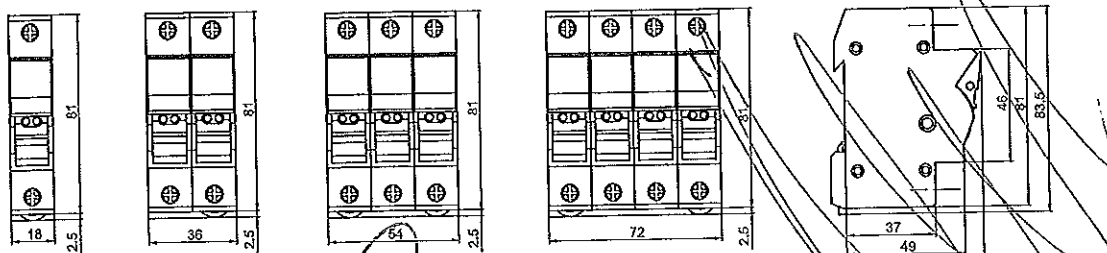

### Interconnecting busbars

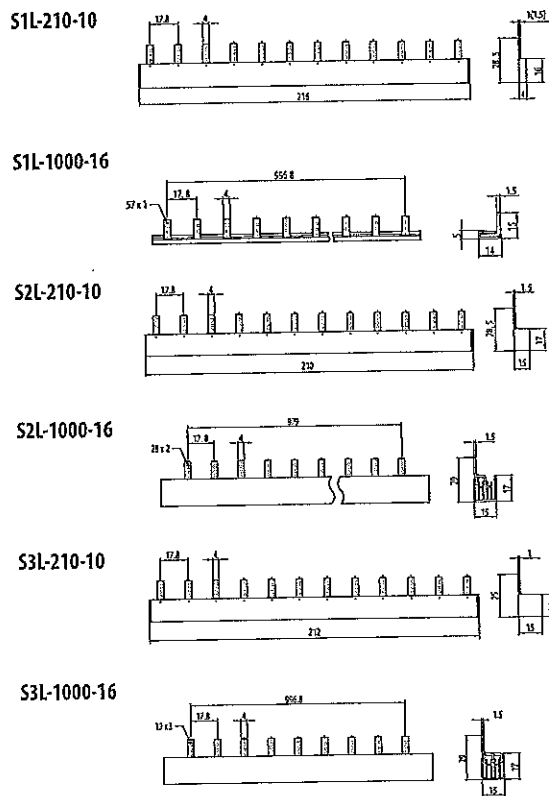


68/139



**W-Series  
WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

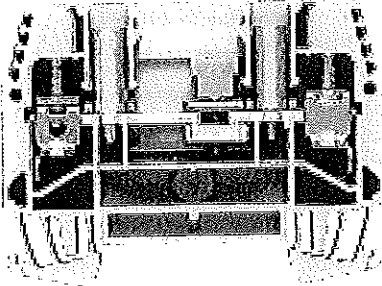

Special instruments are required for measuring electrical energy. One wrong connection during maintenance work is enough to ruin a current transformer! Disconnect test terminals represent a reliable way of solving this problem. As a leading supplier of line connectors, Weidmüller has developed special disconnect test terminals in close cooperation with users. These modular terminals ensure optimum realisation of all important circuits for the measurement of current, voltage and energy. Different current transformer circuits, e.g. for replacing measuring instruments or electricity meters, can be implemented. Besides disconnect test terminals with screw or tension clamp connections, Weidmüller also has a comprehensive range of accessories, including test adapters, cross-connections and markers for the testing of 3-phase and AC circuits as well as voltages.

**General ordering data**

Type	WTL 6/1/STB
Order No.	1016900000
Version	Test-disconnect terminal, Screw connection, 6 mm <sup>2</sup> , 630 V, 41 A, sliding, Dark Beige
GTIN (EAN)	4008190029715
Qty.	50 pc(s).

Creation date October 2, 2015 9:01:32 AM CEST

Catalogue status 11.09.2015 / We reserve the right to make technical changes.

6.9/13.9

**Data sheet**

**W-Series  
WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
www.weidmueller.com

**Technical data**

**Dimensions and weights**

Width	7.9 mm	Width (inches)	0.311 inch
Height	65 mm	Height (inches)	2.559 inch
Depth	47.5 mm	Depth (inches)	1.87 inch
Depth including DIN rail	48.5 mm	Net weight	23.92 g

**Temperatures**

Continuous operating temp., min.	-50 °C	Continuous operating temp., max.	120 °C
----------------------------------	--------	----------------------------------	--------

**Material data**

Material	Wemid	Colour	Dark Beige
UL 94 flammability rating	V-0		

**System specifications**

Version	Screw connection, Disconnection element, with sockets, One end without connector	End cover plate required	Yes
Number of potentials	1	Number of levels	1
No. of clamping points per level	2	Number of potentials per tier	1
Levels cross-connected internally	No	PE connection	No
Mounting rail	TS 35	N-function	No
PE function	No	PEN function	No

**2 clampable conductors (H05V/H07V) with equal cross-section (rated connection)**

Wire connection cross section, finely stranded, two clampable wires, min.	0.5 mm <sup>2</sup>	Wire cross-section, finely stranded, two clampable wires, max.	2.5 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, min.	0.5 mm <sup>2</sup>	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, 2 clampable wires, max.	2.5 mm <sup>2</sup>

**Additional technical data**

Explosion-tested version	No	Number of similar terminals	1
Open sides	right	Type of mounting	Snap-on

**CSA rating data**

Certificate No. (CSA)	200039-1067876	Current size C (CSA)	45 A
Voltage size C (CSA)	600 V	Wire cross section max. (CSA)	8 AWG
Wire cross section min. (CSA)	20 AWG		

Creation date October 2, 2015 9:01:32 AM CEST

Catalogue status 11.09.2015 / We reserve the right to make technical changes.

20/139

**Data sheet**

**W-Series  
WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Conductors for clamping (rated connection)**

Blade size	0.8 x 4.0 mm	Clamping range, rated connection, max.	10 mm <sup>2</sup>
Clamping range, rated connection, min.	0.5 mm <sup>2</sup>	Clamping screw	M 3.5
Connection direction		Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min.	0.5 mm <sup>2</sup>
	on side	Number of connections	2
Gauge to IEC 60947-1	A5	Tightening torque, max.	1.6 Nm
Stripping length	12 mm	Torque level with DMS electric screwdriver	3
Tightening torque, min.	1 Nm	Wire connection cross section AWG, max.	AWG 8
Type of connection	Screw connection	Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max.	6 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 20	Wire connection cross section, finely stranded, max.	10 mm <sup>2</sup>
Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min.	0.5 mm <sup>2</sup>	Wire connection cross section, solid core, min. rated connection	0.5 mm <sup>2</sup>
Wire connection cross section, solid core, max. rated connection	10 mm <sup>2</sup>	Wire connection cross section, stranded, rated connection, min.	1.5 mm <sup>2</sup>
Wire connection cross section, stranded, rated connection, max.	10 mm <sup>2</sup>	Wire connection cross-section, finely stranded, min.	0.5 mm <sup>2</sup>
Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max.	6 mm <sup>2</sup>		

**Dimensions**

TS 35 offset	30 mm
--------------	-------

**Disconnect terminals**

Cross-disconnect	without	Integral test socket	Yes
Slitting	sliding	Torque max. screw separator	0.7 Nm
Torque min. screw separator	0.5 Nm		

**PE rating data**

PEN function	No
--------------	----

**Rating data**

Rated cross-section	6 mm <sup>2</sup>	Rated voltage	630 V
Rated current	41 A	Current at maximum wires	57 A
Volume resistance according to IEC 60947-7-x	0.78 mΩ	Rated impulse withstand voltage	6 kV
Pollution severity	3		

**UL rating data**

Certificate No. (UR)	E60693	Conductor size Factory wiring max. (UR)	8 AWG
Conductor size Factory wiring min. (UR)	20 AWG	Conductor size Field wiring max. (UR)	8 AWG
Conductor size Field wiring min. (UR)	20 AWG	Current size C (UR)	45 A
Voltage size C (UR)	300 V		

Creation date October 2, 2015 9:01:32 AM CEST

Catalogue status 11.09.2015 / We reserve the right to make technical changes.

81/139

**Data sheet**

**W-Series  
WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32768 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**

**Classifications**

ETIM 3.0	EC000902	ETIM 4.0	EC000902
ETIM 5.0	EC000902	ETIM 6.0	EC000902
UNSPSC	30-21-18-11	eClass 5.1	27-14-11-26
eClass 6.2	27-14-11-26	eClass 7.1	27-14-11-26
eClass 8.1	27-14-11-26	eClass 9.0	27-14-11-26

**Product information**

Descriptive text ordering data	TS32 version on request
Descriptive text technical data	Use as 500 V disconnect terminal. Wire connection H07V-K10, H07V-R10 and AWG 8/7 with tightening torque of 1.4 Nm.

**Approvals**

Approvals



ROHS Conform

Creation date October 2, 2015 9:01:32 AM CEST

Catalogue status 11.09.2015 / We reserve the right to make technical changes.

22/139


*(Handwritten signatures and scribbles)*

**Data sheet**

**W-Series**  
**WTL 6/1/STB**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 16  
D-32758 Detmold  
Germany  
Fon: +49 5231 14-0  
Fax: +49 5231 14-292083  
[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**



# Addresses worldwide

## Let's connect.




- AE United Arab Emirates**  
Weldmüller Middle East FZE  
Warehouse Q3-79  
SAIF-Zona  
P.O. BOX 8591  
Sharjah  
Telephone number +971 65572723  
Fax number +971 65572724  
www.info@weldmuller.com
- AO Angola**  
Please contact  
Phambi Interface  
South Africa
- AR Argentina**  
CPI SA  
Bauness 2660  
C1431DOF Buenos Aires  
Telephone number +54 11 4523 8008  
Fax number +54 11 4522 0346  
info@cpl.com.ar  
www.cpl.com.ar
- AT Austria**  
Weldmüller GmbH  
IZ NOE Süd Straße 2b, Obj  
M 59  
2355 Wiener Neudorf  
Telephone number +43 2236 67080  
Fax number +43 2236 6706-899  
office.at@weldmuller.com  
www.weldmuller.com
- AU Australia**  
Weldmüller Pty. Ltd.  
PO BOX 6944  
Huntingwood 2148  
Huntingwood Drive 43  
Huntingwood NSW 2148  
Telephone number +61 2 9671 9959  
Fax number +61 2 9671 9911  
info@weldmuller.com.au  
www.weldmuller.com.au
- AZ Azerbaijan**  
Representative Office  
Weldmüller Interface  
Demirchi Tower, 4th floor  
37, Khojafi ave.  
AZ 1025 Baku  
Telephone number +994 12 488 80 36  
Fax number +994 12 488 80 37  
rashad.mahmudov@weldmuller.com
- BA Bosnia and Herzegovina**  
Please contact  
our Representative Office  
Weldmüller Interface GmbH  
& Co. KG  
Serbia
- or  
BIG electric d.o.o  
Mladena Stojanovića 117A  
78000 Banja Luka  
Telephone number +387 51926277  
Fax number +387 51926277  
bigelectric@bso.net  
www.bigelectric.ba
- BE Belgium**  
Weldmüller Benelux B.V.  
Mechelsesteenweg 519 bus  
6 en 7  
1930 Nossegem  
Telephone number +32 2 752 40 70  
Fax number +32 2 751 36 06  
info@weldmuller.be  
www.weldmuller.be
- BG Bulgaria**  
Weld-Bul EOOD  
Bul. "Kilment Ohridski" 13  
1766 Sofia  
Telephone number +359 2 983 2560  
Fax number +359 2 963 1098  
sofia@weldbul.com  
www.weldbul.com
- BH Bahrain**  
Khayber Trading Company  
P.O Box 1976  
Manama  
Telephone number +973 720747  
Fax number +973 720331  
khayber@bataloo.com.bh
- BR Brazil**  
Weldmüller Conexel do Brasil  
Conexões Elétricas Ltda.  
Av. Presidente Juscelino, 642  
- Piraporinha  
Diadema, São Paulo  
09950-370  
Telephone number +55 (11) 4366-9600  
Fax number +55 (11) 4362-1677  
vendas@weldmuller.com.br  
www.weldmuller.com.br
- BW Botswana**  
Please contact  
Phambi Interface  
South Africa
- BY Belarus**  
TECHNIKON Ltd.  
Nezavisimosti pr. 177-9  
220125 Minsk  
Telephone number +375 17 393-11-77  
Fax number +375 17 393080  
vm@technikon.by
- CA Canada**  
W Interconnections Canada  
Inc.  
10 Spy Court  
Markham Ontario L3R 5H6  
Telephone number +1 (905) 476-1607 Ext. 9836  
Fax number +1 (905) 475-2798  
support@weldmuller.ca  
www.weldmuller.ca
- CG Congo**  
Please contact  
Phambi Interface  
South Africa
- CH Switzerland**  
Weldmüller Schweiz AG  
Rundbuckstraße 2  
8212 Neuhausen am  
Rheinfall SH  
Telephone number +41 52 674 07 07  
Fax number +41 52 674 07 08  
info@weldmuller.ch  
www.weldmuller.ch
- CL Chile**  
ATS - INTECH  
María Luisa Santander 0475  
Santiago  
Providencia 7600859  
Telephone number +56 2 341 1271  
Fax number +56 2 341 1275  
felipe@atsintech.com  
www.atsintech.com
- CPI CHILE LTDA  
Av. Presidente Frei Montalva  
6001, 47 complejo el cortijo  
Santiago - Conchaí  
Telephone number +562 963 8440  
Fax number +562 963 8440  
cpi@cpichile.cl  
www.cpichile.cl
- CHN China**  
Weldmüller Interface  
(Shanghai) Co. Ltd.  
100 Yutong Road  
25 F, BM Intercontinental  
Business Center  
200070 Shanghai  
Telephone number +86 21-22195008  
Fax number +86 21-22195009  
customer.hotline@weldmuller.com.cn  
www.weldmuller.com.cn
- CO Colombia**  
Automatización Avanzada  
S. A.  
Carrera 97 No., 24 c-23  
Bodega 4  
110911 Bogotá-D.C.  
Telephone number +57 (1) 647-8510  
Fax number +57 (1) 422-3044  
comercial@automatizacionavanzada.com  
www.automatizacionavanzada.com
- CR Costa Rica**  
ELVATRON S. A.  
la Unica 400 Norte Banco  
Costa Rica  
San Jose Costa Rica  
Telephone number +506 2961-060  
Fax number +506 6200-609  
dikhhaase@elvatron.com  
www.elvatron.com
- CZ Czech Republic**  
Weldmüller s.r.o.  
Lomnického 6/1705  
140 00 Praha 4  
Telephone number +420 244 00 1 400  
Fax number +420 244 00 1 499  
office@weldmuller.cz  
www.weldmuller.cz
- DE Germany**  
Weldmüller GmbH & Co. KG  
Ohmstraße 9  
32768 Detmold  
Postfach 30 54  
32720 Detmold  
Telephone number +49 5231 1428-0  
Fax number +49 5231 14-292093  
weldmuller@weldmuller.de  
www.weldmuller.de
- DK Denmark**  
Weldmüller Danmark  
Vallensbækvej 18A  
2605 Brøndby  
Telephone number +45 27747800  
kundeservice@weldmuller.dk  
www.weldmuller.dk
- DZ Algeria**  
SARL INTER ELECTRIC  
1a Angles des Rues Okba Ibn  
Nafaa et Hassi Beldja  
2300 Annaba  
Telephone number  
Fax number  
contact@inter-electric.com
- EC Ecuador**  
Elystec S. A., Electricidad  
Sistemas y Tecnología  
Vasco de Contreras N35-251  
y Mañosa  
Quito - Pichincha  
Telephone number +593 22456510  
Fax number +593 22456755  
Elystec@elvio.satnet.net
- EE Estonia**  
Please contact  
our Representative Office  
Weldmüller Interface GmbH  
& Co. KG  
Latvia
- or  
Soots Interface OÜ  
Pärnu mnt 142  
11317 Tallinn  
Telephone number +372 609 6933  
Fax number  
Info@sootsinterface.ee  
www.sootsinterface.ee
- EG Egypt**  
Standard Electric (OMEGA)  
1, Abdelhamid Badawy Street  
Heliopolis  
Cairo  
Telephone number +202 21806111  
Fax number +202 21605600  
stdelec@rite.com
- ES Spain**  
Weldmüller, S. A.  
Narcís Monturiol 11-13, Pol.  
Ind. Sudoste  
8960 Sant Just  
Desvern - Barcelona  
Telephone number +34 934 803 386  
Fax number +34 933 718 055  
weldmuller@weldmuller.es  
www.weldmuller.es
- FI Finland**  
Weldmüller Suomi,  
Weldmüller Aktiebolagetin  
suojissa  
Koy Plaza Vivace  
Äyriö 8C  
FI 1510 Vantaa  
Telephone number +358 20 7351300  
Fax number +358 800 114 687  
asiakaspalvelu@weldmuller.fi  
www.weldmuller.fi
- FR France**  
Weldmüller E. U. R. L.  
12, Chaussée Jules César  
BP 263 Orny  
95523 Cergy-Pontoise Cedex  
Telephone number +33 1 34 24 55 00  
Fax number +33 1 34 24 55 01  
mail@weldmuller.fr
- GB Great Britain**  
Weldmüller Ltd.  
Kleppon House  
Centurion Court Office Park,  
Meridian East, Meridian  
Business Park  
Leicester  
LE19 1TP  
Telephone number +44 116 282 3470  
Fax number +44 116 289 3582  
marketing@weldmuller.co.uk  
www.weldmuller.co.uk
- GE Georgia**  
Please contact  
our Representative Office  
Weldmüller Interface  
Azerbaijan.
- GH Ghana**  
Please contact  
our Representative Office  
Weldmüller Interface GmbH  
& Co. KG  
South Africa.
- GR Greece**  
G.A. Solutions  
Ippokratous 11 Metamorfosi  
144 62 Athen  
Telephone number +30 210 2823233  
Fax number +30 210 2823233  
info@weldmuller.gr  
www.weldmuller.gr
- GT Guatemala**  
Prestelectro, Prestegard  
Electro, S.A.  
Avenida Petapa 44-22,  
Zona 12  
Guatemala City  
Telephone number +502 2442-9346  
Fax number +502 2476-8345  
ventas@preselectro.com
- HK Hong Kong**  
Weldmüller (Hong Kong)  
Limited Co. Ltd.  
Unit 1617, Metropolis Tower  
No. 10 Metropolis Drive,  
Hung Hom, Kowloon  
Telephone number +852 3154 8088  
Fax number +852 31648099  
Info-hk@weldmuller.com.hk
- HR Croatia**  
ElektoPARTNER d.o.o.  
Štavonska avenija 24/6  
HR-10009 Zagreb  
Telephone number +385 (1) 6184 793  
Fax number +385 (1) 6184 795  
elektopartner@zg-t.com.hr  
www.elektopartner.hr
- HU Hungary**  
Weldmüller Kereskedelmi Kft.  
Budapest  
Gubacs út 6.  
1097  
Telephone number +36 1 382 7700  
Fax number +36 1 382 7701  
info@weldmuller.hu  
www.weldmuller.hu
- ID Indonesia**  
PT. Nego Elactindo  
Ruko Mega Grosir Cempaka  
Mas Blok I No. 20 - 22  
Jakarta 10840  
Telephone number +62 21 42882255  
Fax number +62 21 42882266  
sales@negoelactindo.co.id
- IE Ireland**  
Please contact  
Weldmüller Ltd.  
Great Britain
- IL Israel**  
A. U. Shay Ltd.  
4 Ha Tavor lane Industrial  
area Segula  
49222 Patach-Tikva  
P.O. Box 1 00 49  
49222 Patach-Tikva  
Telephone number +972 3-923-3601  
Fax number +972 3-923-4601  
shay@uriel-shay.com  
www.uriel-shay.com
- ATEKA Ltd.  
4 Ha Tavor lane Industrial  
area Segula  
49691 Patach-Tikva  
P.O. Box 4710  
Patach-Tikva  
Telephone number +972 73-200-1311  
Fax number +972 3-924 4245  
marketing@ateka.co.il  
www.ateka.co.il
- IN India**  
Representative Office  
Weldmüller Electronics India  
Pvt. Ltd.  
12th Lane North Avenue, Opp  
Joggers Park,  
Kalyani Nagar, Pune  
411 006  
Telephone number +91 20-41290050  
wmi@weldmuller.in  
www.weldmuller.com
- IS Iceland**  
Samey Automation Center  
Lyngas 13  
210 Garabaer  
Telephone number +354 610 6200  
Fax number +354 610 5201  
Samey@samey.is  
www.samey.is
- IT Italy**  
Weldmüller S. r.l.  
Via Albert Einstein 4  
20092 Cinisello  
Balsamo Milano  
Telephone number +39 02 660681  
Fax number +39 02 6124945  
weldmuller@weldmuller.it  
www.weldmuller.it
- JM Jamaica**  
Please contact  
W Interconnections Inc.  
United States
- JO Jordan**  
Trans Jordan for Electro  
PO Box 33 06 07  
Amman  
Telephone number +962 6 533 6800  
Fax number +962 6 533 6800  
transjordan@bataloo.jo

24/139



You can find all Weidmüller addresses and your local contact on the internet at: [www.weidmueller.com/countries](http://www.weidmueller.com/countries)

Let's connect.

Sales company   
 Representation abroad   
 without representation abroad 

**JP** Japan  
 Nihon Weidmüller Co. Ltd.  
 Sphere Tower Tennoz 2-2-8  
 Higashi-Shinagawa,  
 Shinagawa-ku  
 Tokyo  
 140-0002  
 Telephone number +81 3  
 6711 5300  
 Fax number +81 3 6711  
 5333  
[weidmullerjapan@weidmueller.co.jp](mailto:weidmullerjapan@weidmueller.co.jp)  
[www.weidmueller.co.jp](http://www.weidmueller.co.jp)

**KE** Kenya  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 South Africa.

**KG** Kyrgyzstan  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Azerbaijan.

**KR** Korea  
 Weidmüller Korea Co. Ltd.  
 9th floor  
 429, Teheran-ro, Gangnam-Gu  
 Seoul 135-721  
 Telephone number +82  
 2-516-0003  
 Fax number +82 2-516-0090  
[info@weidmueller.co.kr](mailto:info@weidmueller.co.kr)  
[www.weidmueller.co.kr](http://www.weidmueller.co.kr)

**KW** Kuwait  
 Kans Controls General Trading  
 & Contracting Co. W. L. L.  
 Al Rai Industrial Area, Plot  
 28-30, St. 31  
 13016 Safat  
 B.P. 25693  
 Telephone number +965  
 4741373  
 Fax number +965 4741637  
[info@kanscontrols.com](mailto:info@kanscontrols.com)

**KZ** Kazakhstan  
 Please contact  
 Weidmüller Group  
 Russia

**LB** Lebanon  
 Progress Engineering &  
 Trading Enterprises  
 Al Nahr Street  
 Beirut 11-1111  
 Telephone number +961 1  
 444 664  
 Fax number +961 1 561 880  
[progress@inco.com.lb](mailto:progress@inco.com.lb)

**LT** Lithuania  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Latvia

or  
 ELEKTROS IRANGA  
 Tinklu g. 29 a  
 LT-5319 Panevezys  
 Telephone number +370 (45)  
 682 828  
 Fax number  
[Info@eiranga.lt](mailto:Info@eiranga.lt)

**LU** Luxembourg  
 Please contact  
 Weidmüller Banelux B.V.  
 Netherlands

**LV** Latvia  
 SIA AB14  
 Daugavgrīvis 31b  
 Rīga, LV-1007  
 Telephone number +371 674  
 70399  
 Fax number +371 676  
 24562  
[ab14@tme.lv](mailto:ab14@tme.lv)  
 Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Udensstr. 12-118  
 Rīga, LV-1007  
 Telephone number +371  
 29264766  
 Fax number +371 674  
 65637  
[ilgonis.rudaks@weidmueller.com](mailto:ilgonis.rudaks@weidmueller.com)  
[www.weidmueller.com](http://www.weidmueller.com)

**MA** Morocco  
 Sofimed  
 137, Bd Mouley Ismaïl Roches  
 Noires  
 20290 Casablanca  
 Telephone number  
 Fax number  
[contact@sofimedmaroc.com](mailto:contact@sofimedmaroc.com)

**MD** Moldova  
 BERHORD A & D srl  
 79/1, str. Milescu Spartaru  
 MD-2076 Chisinau  
 Moldova  
 Telephone number +373 (22)  
 815002  
 Fax number +373 (22)  
 815007  
[atiuleanu@berhord.com](mailto:atiuleanu@berhord.com)  
[www.ad.berhord.com](http://www.ad.berhord.com)

**ME** Montenegro  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Serbia.

**MG** Madagascar  
 Please contact  
 Phambili Interface  
 South Africa

**MK** Macedonia  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Serbia

or  
 ELEKTRO - SMK doool  
 UL III Makedonska brigada  
 b.b.  
 1000 Skopje  
 Telephone number +389  
 22460295  
 Fax number  
 Elektro-smk@telekabel.net.mk

**MT** Malta  
 E. S. S., Electrical Supplies &  
 Services Ltd.  
 San Gwaxkin Road  
 Mriehel

Telephone number +356  
 21255777  
 Fax number +356 21255939  
[robertagus@ess.com.mt](mailto:robertagus@ess.com.mt)

**MU** Mauritius  
 Mubelo Electrical Ltd.  
 Office 28, Gateway building,  
 St Jean Road  
 Quatre Bornes  
 Mauritius  
 Telephone number +230  
 4670989  
 Fax number +230 4654051  
[richard.mubelo@orange.mu](mailto:richard.mubelo@orange.mu)

**MW** Malawi  
 Please contact  
 our Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 South Africa.

**MX** Mexico  
 W Interconnections S. A.  
 DE C.V.  
 Blvd. Hermanos Serdán 698,  
 Col. San Rafael Oriente  
 72029 Puebla  
 Telephone number +52 (222)  
 268 6227  
 Fax number +52 (222) 266  
 6242  
[clientes@weidmueller.com.mx](mailto:clientes@weidmueller.com.mx)

**MY** Malaysia  
 Connect Plus Technology  
 Sdn Bhd  
 No. 43, Jalan PJS 11/22,  
 Bandar Sunway  
 46150 Petaling Jaya  
 Selangor Darul Ehsan  
 Telephone number +60 3  
 5933 7363  
 Fax number +60 3 5933  
 6562  
[paul@cpctech.com.my](mailto:paul@cpctech.com.my)  
[www.cpctech.com.my](http://www.cpctech.com.my)

**MZ** Mozambique  
 Please contact  
 Phambili Interface  
 South Africa

**NA** Namibia  
 Please contact  
 Phambili Interface  
 South Africa

**NG** Nigeria  
 Please contact  
 Weidmüller Interface GmbH  
 & Co. KG  
 South Africa

**NL** Netherlands  
 Weidmüller Benelux B. V.  
 Franciscusweg 221  
 1216 SE Hiversum  
 P.O. Box 1505  
 1200 BM Hiversum  
 Telephone number +31 35  
 626 12 61  
 Fax number +31 35 623  
 20 44  
[info@weidmueller.nl](mailto:info@weidmueller.nl)  
[www.weidmueller.nl](http://www.weidmueller.nl)

**NO** Norway  
 Skråvinger J.F. Knudtzen AS  
 Bllingsstadletta 97  
 1396 Bllingsstad  
 PO Box 160  
 1378 Nesbru  
 Telephone number +47 66  
 98 33 60  
 Fax number +47 66 98 09 55  
[firmapost@knudtzen.no](mailto:firmapost@knudtzen.no)  
[www.knudtzen.no](http://www.knudtzen.no)

**NZ** New Zealand  
 Cuthbert S. Stewart Ltd.  
 27 Te Puni Street  
 Petone  
 PO Box 38496  
 Wellington Mail Centre 5054  
 Telephone number (04) 568  
 6156  
 Fax number (09) 489 1762  
[cs@cuthbertstewart.co.nz](mailto:cs@cuthbertstewart.co.nz)  
 Cuthbert S. Stewart Ltd  
 4 Fred Thomas Drive  
 Aon Building, Ground Floor,  
 South Entry  
 Takapuna  
 PO Box 100 338  
 North Shore City 746  
 Telephone number (09) 489  
 1761  
 Fax number (04) 668 6056  
[cs@cs@cuthbertstewart.co.nz](mailto:cs@cs@cuthbertstewart.co.nz)

**OM** Oman  
 DAN INTERNATIONAL LLC.  
 Ghala St. 111  
 BP 2901  
 Seeb  
 Telephone number +968  
 5036 77  
 Fax number +968 5037 65  
[yedou@danintl.com](mailto:yedou@danintl.com)

**PE** Peru  
 IMPEXINCA S.A.C.  
 Calle Ortiz de Zavallos No.  
 105, Urb. San Antonio  
 18  
 Lima, Miraflores  
 Telephone number +51 1  
 447 5608  
[info@impexinca.pe](mailto:info@impexinca.pe)  
[www.impexinca.pe](http://www.impexinca.pe)  
 J & W CIA. S. A.  
 Calle 6 Mz. D Lta. 23, Urb.  
 Ind. Girmansa  
 01  
 Celso  
 Telephone number +51 1  
 572 2539  
 Fax number +51 1 572 0152  
[contacto@jwcla.com](mailto:contacto@jwcla.com)  
[www.jwcla.com](http://www.jwcla.com)

**PH** Philippines  
 Enclosure Systems Specialists  
 Inc.  
 2278 Don Chino Roces  
 Avenue Extension  
 Room 103/105 Narra Building  
 1231 Makati City  
 Telephone number +63 2  
 813 8580  
 Fax number +63 2 813 8588  
[sales\\_encsys@pldids.net](mailto:sales_encsys@pldids.net)  
[www.enclosuresystemsp.com](http://www.enclosuresystemsp.com)

**PK** Pakistan  
 Automation Controls (Pak)  
 Apartment No. 33 C III,  
 Chensb Block, Allama Iqbal  
 Town  
 Lahore  
 Telephone number +92 42  
 37809948  
 Fax number +92 42  
 37809950  
[nadeem@acpak.com.pk](mailto:nadeem@acpak.com.pk)  
[www.acpak.com.pk](http://www.acpak.com.pk)

**PL** Poland  
 Weidmüller Sp. z o. o.  
 ul. Ogrodowa 58  
 00-078 Warszawa  
 Telephone number +48 22  
 610 09 40  
 Fax number +48 22 510  
 09 41  
[biuro@weidmueller.com.pl](mailto:biuro@weidmueller.com.pl)  
[www.weidmueller.pl](http://www.weidmueller.pl)

**PR** Puerto Rico  
 Please contact  
 W Interconnections Inc.  
 United States

**PT** Portugal  
 Weidmüller Sistemas de  
 Interface S. A.  
 Estrada Outelro Pelina, R.  
 Augusto Dias da Silva, Lote  
 B - Esc. 2  
 São Domingos de Rana  
 2785-615 Alcaboda  
 Telephone number +351 214  
 459 191  
 Fax number +351 214  
 455 871  
[weidmueller@weidmueller.pt](mailto:weidmueller@weidmueller.pt)  
[www.weidmueller.pt](http://www.weidmueller.pt)

**PY** Paraguay  
 Please contact  
 CPI SA  
 Argentina

**QA** Qatar  
 Doha Motors  
 PO Box 145

Telephone number +974  
 4651441  
 Fax number +974 4654579  
[dmt@tech@qatar.net.qa](mailto:dmt@tech@qatar.net.qa)  
<http://www.dohamotorsgroup.com/td.html>  
 Petroleum Technology Co.  
 W.L.L.  
 PO Box 16069  
 6th Floor Toyota tower  
 Singapore 339940  
 Telephone number +974  
 44419603  
 Fax number +974 44419604  
[petrotech@qatar.net.qa](mailto:petrotech@qatar.net.qa)  
[www.petrotech.com.qa](http://www.petrotech.com.qa)

**RO** Romania  
 Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Ionescu Crum Street, No.  
 1, 1st Tower, 1st Floor,  
 Office 4  
 500446 Brasov - Brasov  
 Business Park  
 Telephone number +40 (268)  
 446 222  
 Fax number +40 (262)  
 205 410  
[claudiu.totes@weidmueller.com](mailto:claudiu.totes@weidmueller.com)  
[www.weidmueller.com](http://www.weidmueller.com)

**RS** Serbia  
 Representative Office  
 Weidmüller Interface GmbH  
 & Co. KG  
 Ustanička 189, III sprat  
 lokal 7a  
 11050 Beograd  
 Telephone number +381  
 11 2685274  
 Fax number +381  
 11 2885274  
[korab@rebnovic@weidmueller.com](mailto:korab@rebnovic@weidmueller.com)  
 Teta Elektrik d.o.o.  
 ULD Draga Ljeto 6  
 Beograd  
 Telephone number +381 11  
 2772 415  
 Fax number +381 11 2772  
 850  
[office@teta.rs](mailto:office@teta.rs)  
[www.teta.rs](http://www.teta.rs)

**RU** Russia  
 Weidmüller Group  
 7/10 Khlebozavodskiy  
 Passage,  
 Moskau  
 115230  
 Telephone number +7 495  
 280 72 71  
 Fax number +7 495 280  
 72 71  
[Info@weidmueller.ru](mailto:Info@weidmueller.ru)  
[www.weidmueller.ru](http://www.weidmueller.ru)

**SA** Saudi Arabia  
 Al Abdulkarim Holding Co.  
 P.O. Box 4  
 Darunam 31411  
 Telephone number +966 3  
 8337110  
 Fax number +966 3  
 8829547  
 Email [sales@kh.com.sa](mailto:sales@kh.com.sa)  
[www.weidmueller.sa](http://www.weidmueller.sa)

Saudi Electric Supply  
 Company (SESCO)  
 P.O. Box 32 98  
 Al Khobar 31952  
 Telephone number +966 3  
 8829546 Ext. 3030  
 Fax number  
 Email [Sales@sesco-gex.com](mailto:Sales@sesco-gex.com)  
[www.sesco-gex.com](http://www.sesco-gex.com)

**SE** Sweden  
 Weidmüller AB  
 Axel Danielssons väg 271  
 BOX 31025  
 SE-200 49 Malmö  
 Telephone number +46 77-  
 143 00 44  
 Fax number +46 40-37 48 60  
[info@weidmueller.se](mailto:info@weidmueller.se)  
[www.weidmueller.se](http://www.weidmueller.se)

**SG** Singapore  
 Weidmüller Pte. Ltd.  
 70 Bendemei Road  
 # 04-03 Lurene Building  
 Singapore 339940  
 Telephone number +65 6841  
 5311  
 Fax number +65 6841 5377  
[info@weidmueller.com.sg](mailto:info@weidmueller.com.sg)  
[www.weidmueller.com.sg](http://www.weidmueller.com.sg)

**SI** Slovenia  
 Elektrospoj d. o. o.  
 Stegne 27  
 SI- 1000 Ljubljana  
 Osrednjeslovenska  
 Telephone number +386 1  
 511 3610  
 Fax number +386 1 511  
 1604  
[info@elektrospoj.si](mailto:info@elektrospoj.si)  
[www.elektrospoj.si](http://www.elektrospoj.si)

**SK** Slovakia  
 ELEKTRIS s.r.o.  
 Elektrárenská 1  
 831 04 Bratislava  
 Telephone number +421  
 2/4920 0113  
 Fax number +421 2/4920  
 0119  
[bratislava@elektris.sk](mailto:bratislava@elektris.sk)

**SV** El Salvador  
 Prestegard Electro  
 11 Avenida Norte No. 240  
 Edificio Salazar No. 2  
 San Salvador  
 Telephone number +503  
 2271 1690  
 Fax number +503 2221  
 3851  
[prestegard@navegante.com.sv](mailto:prestegard@navegante.com.sv)

**SY** Syria  
 Please contact  
 Weidmüller Middle East  
 United Arab Emirates

**SZ** Swaziland  
 Please contact  
 Phambili Interface  
 South Africa

125/139